

1.00mm Pitch FFC/FPC – F52Q/F52R Series

RIGHT ANGLE ZIF FLEX CONNECTORS

F52Q/F52R series are 1.00mm pitch right angle ZIF flex connectors with slider mechanism, top contact and surface mount termination. These connectors feature a height of 2.00mm and come in 4 to 34 contacts. This series features a cable thickness of 0.30mm and provide enhanced durability of 30 mating cycles. The connectors come with a robust design and prevent solder and flux wicking. These are ideal for automotive, data, industrial, communication, consumer and medical applications.

- Easy to operate and strong FFC/FPC retention makes it vibration-proof
- Ensures high solderability and high durability



FEATURES

- ZIF (Zero Insertion Force) mechanism
- Slider mechanism
- Design against solder and flux wicking
- High temperature thermoplastic housing
- 4 to 34 contacts available
- Lead and halogen-free

BENEFITS

- Absence of frictional mating wear resulting in high mating cycle life
- Easy to operate and strong FFC/FPC retention makes it vibration-proof
- Ensures high solderability
- Wide operating temperature range of -40°C to +105°C
- Comprehensive range to satisfy different customer requirements
- Meets environmental, health and safety requirements

TECHNICAL INFORMATION

MATERIAL

- Housing: LCP, natural color (UL94V-0)
- Slider: PA9T, black color (UL94V-0)
- Contact: Phosphor bronze, T=0.20mm
- Anchor-plate: Brass, T=0.20mm

MECHANICAL PERFORMANCE

- FFC/FPC Retention Force: 30gf/pin
- Terminal Retention Force: 100gf/terminal min.
- Anchor-plate Retention Force: 100gf/plate min.
- Durability: 30 mating cycles

ELECTRICAL PERFORMANCE

- Voltage Rating: 50V AC/DC
- Current Rating: 0.5A
- Contact Resistance: 30MΩ max.
- Insulation Resistance: 500M Ω min.
- Dielectric Withstanding Voltage: No short or breakdown after 500V AC, 2mA, 1min.

PACKAGING

• Tape & Reel

APPROVALS AND CERTIFICATIONS

- UL file number E106764
- RoHS compliant

SPECIFICATION

Aorora Product Specification: IS.EQC.001


ENVIRONMENTAL

• Operating Temperature Range: -40°C to +105°C

TARGET MARKETS/APPLICATIONS



Car Multimedia Car Navigation Dashboard PND





Power Switches Notebook Tablets Wearables

Gaming DSC LCD & PDP TV






Sensing element Monitoring camera Human Machine Interface Industrial PC Robotics



Ultrasonic Patient Monitor MRI CT Infusion Pump

PART NUMBER SELECTOR

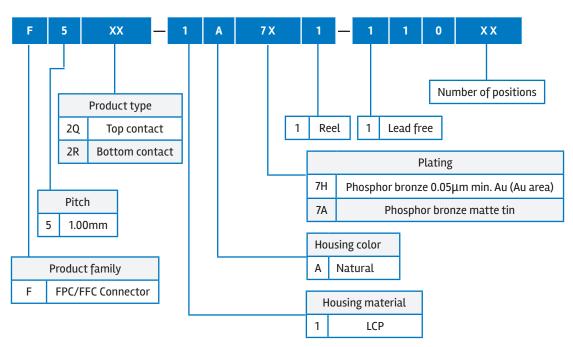

40R0RAF52Q52R0719EA4

www.amphenol-icc.com

Disclaimer

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

F52Q-1A7H1-11004 F52Q-1A7H1-11006 F52Q-1A7H1-11007 F52Q-1A7H1-11008 F52Q-1A7H1-11009 F52Q-1A7H1-11012 F52Q-1A7H1-11015 F52Q-1A7H1-11016 F52Q-1A7H1-11017 F52Q-1A7H1-11018 F52Q-1A7H1-11020 F52Q-1A7H1-11022 F52R-1A7H1-11018 F52R-1A7H1-11020 F52R-1A7H1-11022 F52R-1A7H1-11025 F52R-1A7H1-11026 F52R-1A7H1-11028 F52R-1A7H1-11010 F52R-1A7H1-11012 F52R-1A7H1-11013 F52R-1A7H1-11014 F52R-1A7H1-11016 F52R-1A7H1-11017 F52Q-1A7H1-11030 F52Q-1A7H1-11032 F52Q-1A7H1-11034 F52R-1A7H1-11004 F52R-1A7H1-11006 F52R-1A7H1-11008 F52Q-1A7H1-11014 F52R-1A7H1-11030 F52R-1A7H1-11032 F52R-1A7H1-11034 F52Q-1A7H1-11026 F52Q-1A7H1-11028 F52Q-1A7A1-11006 F52Q-1A7A1-11008 F52Q-1A7A1-11009 F52Q-1A7A1-11010 F52Q-1A7A1-11012 F52Q-1A7A1-11013 F52R-1A7H1-11009 F52R-1A7H1-11015 F52R-1A7H1-11027 F52R-1A7A1-11028 F52R-1A7A1-11030 F52R-1A7A1-11032 F52R-1A7A1-11034 F52R-1A7H1-11005 F52R-1A7H1-11007 F52R-1A7A1-11018 F52R-1A7A1-11020 F52R-1A7A1-11022 F52R-1A7A1-11025 F52R-1A7A1-11026 F52R-1A7A1-11027 F52R-1A7A1-11010 F52R-1A7A1-11012 F52R-1A7A1-11013 F52R-1A7A1-11014 F52R-1A7A1-11015 F52R-1A7A1-11017 F52Q-1A7H1-11025 F52R-1A7A1-11005 F52R-1A7A1-11006 F52R-1A7A1-11007 F52R-1A7A1-11008 F52R-1A7A1-11009 F52Q-1A7A1-11026 F52Q-1A7A1-11028 F52Q-1A7A1-11030 F52Q-1A7A1-11032 F52Q-1A7H1-11010 F52Q-1A7H1-11013 F52Q-1A7A1-11014 F52Q-1A7A1-11016 F52Q-1A7A1-11018 F52Q-1A7A1-11020 F52Q-1A7A1-11022 F52Q-1A7A1-11025

FCI / Amphenol:

F52Q1A7A111004 F52Q1A7A111007 F52Q1A7A111015 F52Q1A7A111017 F52R1A7A111004 F52R1A7A111016