
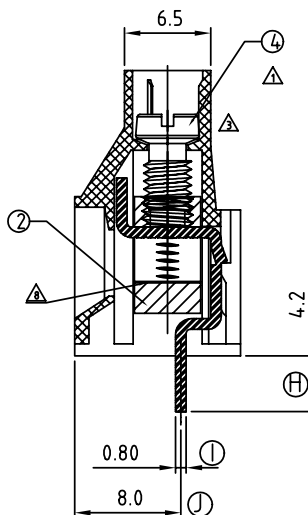
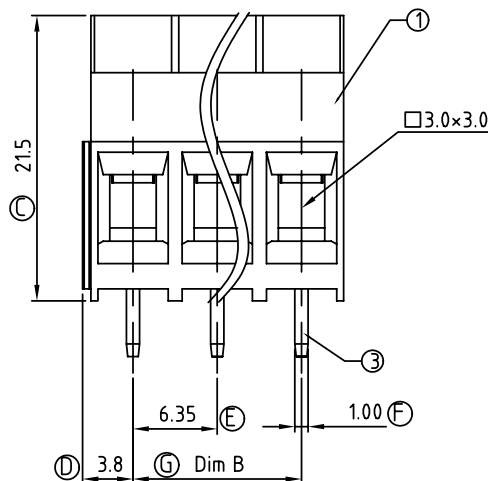
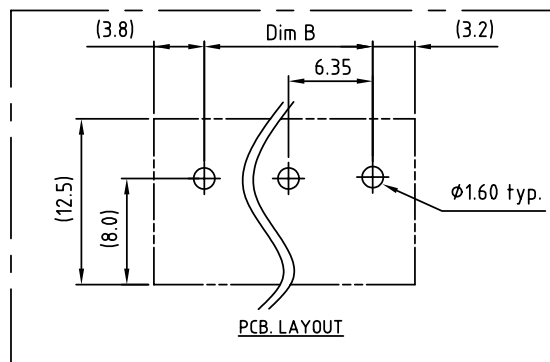


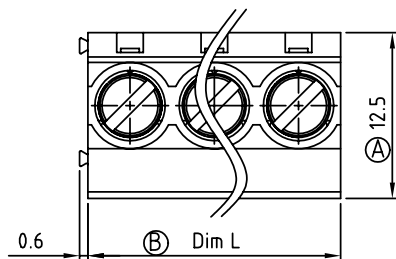

Poles	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16
Dim L	12.70	19.05	25.40	31.75	38.10	44.45	50.80	57.15	63.50	69.85	76.20	88.90	88.90	95.25	101.6
Dim B	6.35	12.70	19.05	25.40	31.75	38.10	44.45	50.80	57.15	63.50	69.85	76.20	82.55	88.90	95.25
TOL	±0.15				±0.25				±0.35						

SIGN	DATE	DESCRIPTION	APPROVER
△	9/06'07	Screw is changed from M3.0 to M3.5	Marvin
△	9/06'07	The Electrical is changed	Marvin
△	12/30'08	body 螺絲孔新增三條肋	Kind
△	12/30'08	Temperature changed from -30°C~105°C to -40°C~115°C	Kind
△	7/4'09	Current is changed	Jody
△	11/12'09	Wire guard solder pin is changed from Brass to Copper	Aaron
△	02/22'10	Torque is changed from 8.9Lb-In to 6.9Lb-In	Aaron
△	08/03'10	Clamp is changed	Aaron
△	12/13'10	Add is " TUV "	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item 1 Terminal housing :Thermoplastic (UL 94V-0)
- Item 2 Clamp : Brass , Ni plated
- △ ● Item 3 Wire guard solder pin : Copper , Tin plated
- Item 4 Terminal screw: Steel Zinc plating"-slot type
- △ Electrical cULus TUV
- Voltage rating: 300VAC 450VAC
- △ ● Current rating: 30A 41A
- Wire range: 0.20~6.0mm²
- △ ● Solid wire(AWG): 10~24
- △ ● Stranded wire(AWG): 10~24
- △ ● Torque(Lb-In): 6.9 0.85 N.m
- △ ● Screw: M3.5
- Wire strip length: 6~7mm
- Withstanding Voltage: 1.6KV 2.5KV
- △ ● Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: cULus TUV

T7 xx 03 x 0 xxxx G

No. of poles end	0	Black (RAL9005)	0000 Standard @ Logo
stackable design	2	Red (RAL3001/D)	000A Standard ANY Logo
02 2 CONTACTS	3	Orange(RAL2011/P)	Any special item by
03 3 CONTACTS	4	Yellow(RAL1018/A)	customer request,
...	5	Green(RAL6018/T)	please contact sales
16 16 CONTACTS	6	Blue (RAL5015/A)	department.
	8	Grey(RAL7035/D)	

RoHS
Pb<40,000ppm

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	T7 6.35 SERIES 180D (2P-16P)			
PART NO.	T7xx03x0xxxxG		DWG NO.	8T70001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.
			Chen Bo 2010.12.13	
				UNIT: mm
				SCALE: NONE
				SHEET: 01/01
				REV.: L
				X. ±0.50
				X.X ±0.30
				X.XX ±0.10
				X° ±1°

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

[T70203500000G](#) [T70303500000G](#) [T70403500000G](#) [T70503500000G](#) [T70603500000G](#) [T70703500000G](#)
[T70803500000G](#) [T70903500000G](#) [T71003500000G](#) [T71103500000G](#) [T71203500000G](#) [T71303500000G](#)
[T71403500000G](#) [T71503500000G](#) [T71603500000G](#) [T70303000000G](#)