

PCI Express® Gen 4 and Gen 5 Card Edge Connectors

EXTEND DIFFERENTIAL SIGNALING TO 16GT/s AND 32GT/s FOR NEXT-GENERATION SYSTEMS

PCIe® Gen 4 and Gen 5 connectors outperform industry standards PCIe® 4.0 and 5.0 (proposed) that require higher speed performance. The optimized series supports backwards mating and is footprint compatible with PCIe 3/2/1.

These 1.00mm pitch, vertical and right angle card edge connectors enable all generations of PCI Express® signaling in desktop PCs, workstations, and servers. The connector designs support 2.5GT/s (Gen 1), 5.0GT/s (Gen 2), 8.0GT/s (Gen 3) and the recent upgrade to 16GT/s (Gen 4), even further to 32GT/s (Gen 5) per differential signal pair.

Amphenol ICC's expansive range of vertical PCIe® Gen 4 and Gen 5 connectors will include options for surface mount (SMT), through hole solder, press-fit (PF) and straddle mount terminations.

- Backward mating and footprint compatible
- Higher speed performance without altering footprint
- Wide range of positions available
- Optional ridge feature according to customer preference

FEATURES

- A variety of termination types are available
- Aside from X1, X4, X8, X16 standard links as per PCI-SIG CEM specification, X24, X32 are also available
- Backward mating and footprint compatible
- Capable to support up to 32GT/s without altering design
- RoHS compliant
- Low-halogen material



BENEFITS

- Able to meet different customer soldering requirements
- Provides excellent performance and additional options for extreme bandwidth application
- Outperform Gen 4/5 specification, but also backward compatible to Gen 1/2/3 specification, with the exception of Gen 5 straddle mount
- Customers can upgrade directly to next-generation systems without additional cost in system redesign
- Meets environmental, health and safety requirements
- Meets next-generation requirements

TECHNICAL INFORMATION

MATERIAL

- Contact Base Metal: Copper alloy
- Contact Area Finish: Gold over nickel
- Solder Area Finish: Tin over nickel
- Housing Material: High-temperature thermoplastic (UL94V-0) for reflow soldering or thermoplastic (UL94V-0) for wave soldering. Color: Black or off-white
- Metal Board Locks: Copper alloy
- Board Locks Finish: Tin over nickel

ELECTRICAL PERFORMANCE

- Contact Resistance: 30mΩ max. initially with 10mΩ max. change after environmental exposures
- Current Rating: 1.1A min. per pin for the 8 power pins and 8 nearest ground pins
- Signal Integrity Summary
- The part series shown on this datasheet support PCI Express® high speed electrical requirements for 2.5Gb/s (PCIe® Gen 1), 5.0Gb/s (PCIe® Gen 2), 8.0Gb/s (PCIe® Gen 3), 16.0Gb/s (PCIe® Gen 4) and 32.0Gb/s (PCIe® Gen 5) with the exception of those part series specifically noted as PCIe® Gen 1 in the part number tables.

MECHANICAL PERFORMANCE

- Durability Rating: 50 cycles min.
- PCB Insertion Force: 1.15 N max. per contact pair
- PCB Removal Force: 0.15 N min. per contact pair

PACKAGING

- Hard or Soft Tray

ENVIRONMENTAL

- EIA-364-1000.01. The test groups/sequences and durations are derived from the following requirements:
- Durability (mating/unmating) rating of 50 cycles
- Field Temperature: 65°C
- Field Life: Seven years
- Temperature Life (preconditioning): 92 hours at 105°C
- Temperature Life: 168 hours at 105°C
- Mixed Flowing Gas: 10 days

APPROVALS & CERTIFICATION

- CSA

SPECIFICATIONS

- Industry
 - PCI Express® Card Electromechanical Specification
 - PCI Express® Module Electromechanical Specification
 - For more information on the applicable PCI-SIG specifications, visit www.pcisig.com.
- AFCI
 - GS-12-1406 PCI Express® group of connectors

TARGET MARKETS/APPLICATIONS




Desktop PCs
Servers
Workstations



Desktop PCs
Notebook PCs

SI PERFORMANCE

Vertical PCIe® Gen 4 SI simulation performance @ 16GT/s

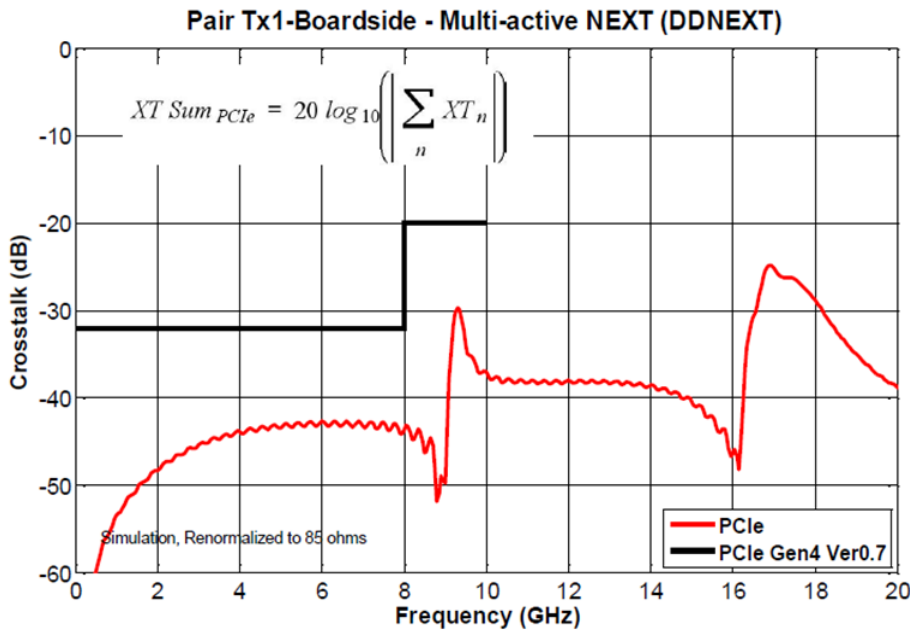

PART NUMBERS

Description	Performance	Termination	Position	Part Numbers
PCIe Gen 5	32GT/s	Straddle mount	36, 64, 98, 164 pos	10156206*
PCIe Gen 5	32GT/s	Vertical SMT	36, 64, 98, 164 pos	10146070*
PCIe Gen 4	16GT/s	Vertical SMT	36, 64, 98, 164 pos	10146065*
PCIe Gen 4	16GT/s	Vertical SMT ULP	36, 64, 98, 164 pos	10146788*
PCIe Gen 4	16GT/s	Vertical SMT high rise	36, 64, 98, 164 pos	10153927*
PCIe Gen 4	16GT/s	Vertical SMT	230, 280 pos	10139595*
PCIe Gen 4	16GT/s	Vertical SMT with latch	36, 64, 98, 164 pos	10147430*
PCIe Gen 4	16GT/s	Vertical SMT open wall	36, 64, 98, 164 pos	10146067*
PCIe Gen 4	16GT/s	Vertical PF	36, 64, 98, 164 pos	10145445*
PCIe Gen 4	16GT/s	Vertical PTH	36, 64, 98, 164 pos	10142333*
PCIe Gen 4	16GT/s	Vertical PTH with latch	36, 64, 98, 164 pos	10152821*
PCIe Gen 4	16GT/s	Vertical PTH open wall	36, 64, 98, 164 pos	10148195*
PCIe Gen 4	16GT/s	Straddle mount	36, 64, 98, 164 pos	10146027*
PCIe Gen 4	16GT/s	Right angle SMT	36, 64, 98, 164 pos	10151422*

* denotes base part number. Please contact Amphenol ICC for complete part numbers.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

[10146067-112Y0LF](#) [10144667-123Y0LF](#)

FCI / Amphenol:

[10146065-113A0LF](#) [10146065-110C0LF](#) [10146065-112Y0LF](#) [10146065-123Y0LF](#) [10146065-123X0LF](#) [10146065-110T0LF](#) [10146065-120C0LF](#) [10146065-111T0LF](#) [10146065-122X0LF](#) [10146065-122Y0LF](#) [10146065-113Y0LF](#) [10146065-112X0LF](#) [10146065-113X0LF](#) [10144667-112Y0LF](#) [10144667-113Y0LF](#) [10146065-113Q0LF](#) [10144667-113Q0LF](#) [10146067-111C0LF](#) [10146067-112X0LF](#) [10146067-113A0LF](#) [10142333-10011MLF](#) [10142333-10012MLF](#) [10142333-10010MLF](#) [10146065-113Y1LF](#) [10146065-112Y1LF](#) [10142333-10013MLF](#) [10146027-A40110LF](#) [10146027-A40100LF](#) [10146027-A40010LF](#) [10146027-640110LF](#) [10142333-10003MLF](#) [10142333-10022MLF](#) [10142333-10033ALF](#) [10142333-10111MLF](#) [10142333-10102MLF](#) [10142333-10013QLF](#) [10142333-10023MLF](#) [10146067-123Y0LF](#) [10146067-113X0LF](#) [10146067-113Y0LF](#) [10144661-113Y0LF](#) [10146070-122Y0LF](#) [10146070-113Y0LF](#) [10146070-112Y0LF](#) [10146065-123W0LF](#) [10146065-111C0LF](#) [10146065-113B0LF](#) [10146065-122W0LF](#) [10146065-123Q0LF](#) [10146065-113Z0LF](#) [10144667-113A0LF](#) [10144667-113X0LF](#) [10146027-642010LF](#) [10146027-980110LF](#) [10146027-980010LF](#) [10146027-A41110LF](#) [10146514-10031MLF](#) [10146514-10030MLF](#) [10146065-123Z0LF](#) [10142333-10033MLF](#) [10150775-113Y0LF](#) [10144667-122Y0LF](#) [10146070-111T0LF](#) [10146070-110T0LF](#) [10146070-123Y0LF](#) [10146027-A42010LF](#) [10146065-112Q0LF](#) [10146065-123F0LF](#) [10146065-123A0LF](#) [10146065-113F0LF](#) [10142333-10002MLF](#) [10142333-10002QLF](#) [10142333-10103MLF](#) [10146067-111T0LF](#) [10146067-123Z0LF](#) [10139595-111D0LF](#) [10139595-121D0LF](#) [10146070-113Q0LF](#) [10146070-113X0LF](#) [10144661-112Y0LF](#) [10146027-980210LF](#) [10146067-113Z0LF](#) [10146067-122Y0LF](#) [10139595-121F0LF](#) [10144661-113Y1LF](#) [10146070-113A0LF](#) [10142333-10112MLF](#) [10146067-110C0LF](#) [10128241-110C0LF](#) [10142333-10110MLF](#) [10146065112W0LF](#) [10146065113W0LF](#) [1014233310132MLF](#) [10146070112Q0LF](#) [1014651410131MLF](#) [10147430-113T0LF](#) [10139595-110T0LF](#) [10139595-111T0LF](#) [10148195-10102MLF](#) [10156545-123Q100LF](#)