
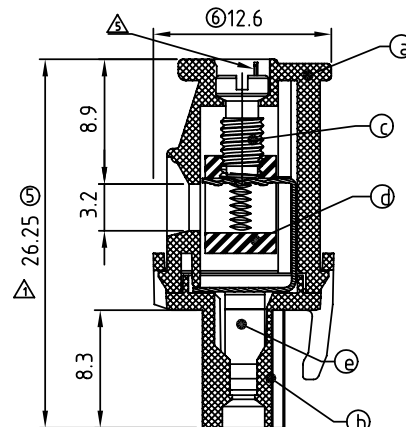

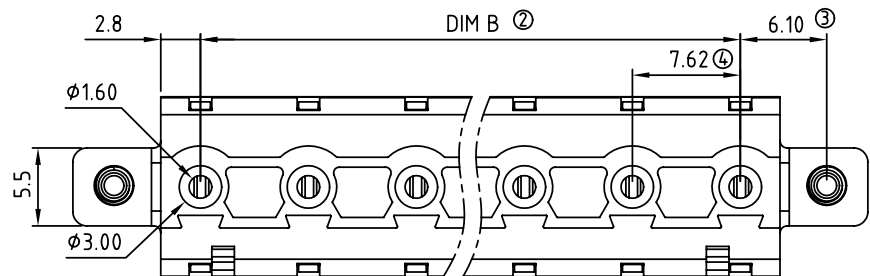
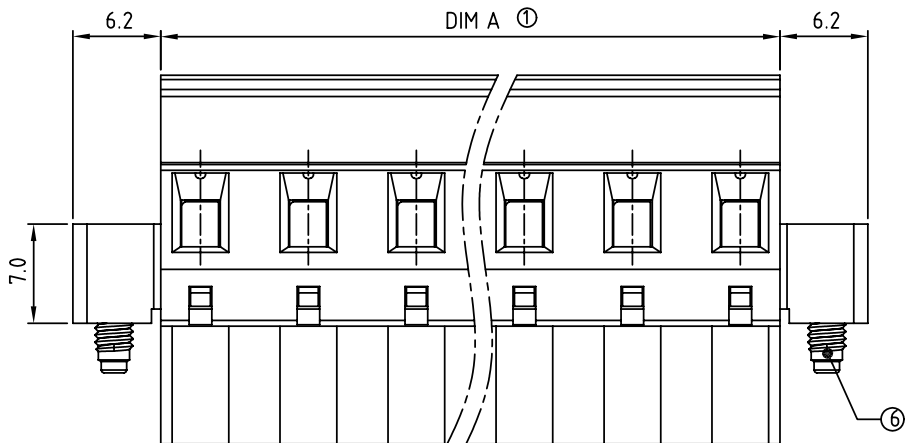


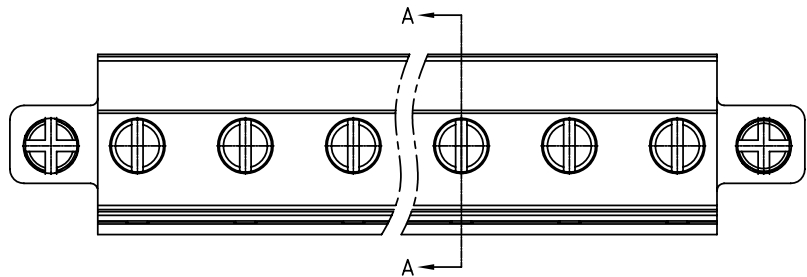

DimA=(N-1)×7.62+5.6
DimB=(N-1)×7.62
N=Number of contacts

POLES	DIM A	DIM B
2p-6p	±0.20	±0.20
7p-11p	±0.30	±0.30
12p-16p	±0.40	±0.40

SIGN	DATE	DESCRIPTION	APPROVER
△	2008.6.19	The dimension changed from 26.00mm to 26.25mm	Kind
△	12/02'08	With flange screw changed from"-slot type to"+/-"slot type	Jacke
△	2010.01.23	The withstanding voltage is changed	Jacke
△	2010.03.12	Add the 2p mark	Jacke
△	2010.05.17	The design is changed	Jacke

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY Y!!!

Material

- Item a Terminal up body:Thermoplastic (UL94V-0)
 - Item b Terminal down body:Thermoplastic (UL94V-0)
 - Item c Terminal screw:Steel Zinc plating "- slot type
 - Item d Clamp:Brass, Ni plated
 - Item e Female contact:PhBz (CuSn) Tin plated
 - △ Item f With flange screw:Steel Zinc plating M2.5 "+/-" slot type
- Electrical cULus/TUV
- Voltage rating: 300VAC/750VAC
 - Current rating: 15A/15A
 - Wire range:0.2-2.5mm²
 - Solid wire(AWG): 12-24
 - Stranded wire(AWG): 12-24
 - Torque: 3.5 Lb-In 0.4Nm
 - Screw: M3
 - Wire strip length: 6-7mm
 - △ Withstanding Voltage: 1.6KV/6KV
 - Operating temperature: -40°C to +115°C
 - Safety Approval: cULus TUV

TS xx 01 x D xxxx G

02 2 CONTACTS
03 3 CONTACTS
...
16 16 CONTACTS

Color
0 Black (RAL9005)
2 Red (RAL3001/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7035/D)

0000 Standard @ Logo RoHS
000A Standard ANY Logo Pb<40,000ppm
Any special item by customer request, please contact sales department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TS 7.62 Series (2-16p) hook on back side With flange							
PART NO.	TSxx01xDxxxxG			DWG NO.	8TS0504			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance	
		Jacke 2010.05.17	Jacke 2010.01.23		UNIT: mm		X. ±0.50	
					SCALE: NONE		X.X ±0.30	
					SHEET: 01/01 REV.: H		X.XX ±0.10	
							X° ±1°	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

<u>TS02015D0000G</u>	<u>TS03015D0000G</u>	<u>TS04015D0000G</u>	<u>TS05015D0000G</u>	<u>TS06015D0000G</u>	<u>TS07015D0000G</u>
<u>TS08015D0000G</u>	<u>TS09015D0000G</u>	<u>TS10015D0000G</u>	<u>TS11015D0000G</u>	<u>TS12015D0000G</u>	<u>TS13015D0000G</u>
<u>TS14015D0000G</u>	<u>TS15015D0000G</u>	<u>TS16015D0000G</u>	<u>TS10018D0000G</u>	<u>TS14018D0000G</u>	<u>TS15010D0000G</u>
<u>TS11018D0000G</u>	<u>TS16018D0000G</u>	<u>TS13018D0000G</u>	<u>TS09010D0000G</u>	<u>TS15018D0000G</u>	<u>TS12018D0000G</u>
<u>TS08018D0000G</u>	<u>TS12010D0000G</u>	<u>TS04018D0000G</u>	<u>TS05018D0000G</u>	<u>TS07018D0000G</u>	<u>TS13010D0000G</u>
<u>TS16010D0000G</u>	<u>TS08010D0000G</u>	<u>TS02010D0000G</u>	<u>TS02018D0000G</u>	<u>TS10010D0000G</u>	<u>TS05010D0000G</u>
<u>TS06010D0000G</u>	<u>TS04010D0000G</u>	<u>TS06018D0000G</u>	<u>TS07010D0000G</u>	<u>TS11010D0000G</u>	<u>TS03010D0000G</u>
<u>TS03018D0000G</u>	<u>TS09018D0000G</u>	<u>TS14010D0000G</u>			