

10-630907-(-)

SHEET 1 OF 1

REV. D


C

B

A

FORMAT: C-UL-E-1

ASSEMBLY NUMBER	CAP	DISC	Ø B MAX	A THREAD CLASS 2B -0.1P-0.3L-TS	APPROX CORD LENGTH
10-630907-009	10-633127-09M	10-113110-101	.875	.6250	7.625 INCHES (.635 FT)
10-630907-011	10-633127-11M	10-113110-121	1.000	.7500	7.75 INCHES (.646 FT)
10-630907-013	10-633127-13M	10-113110-141	1.125	.8750	8.0 INCHES (.667 FT)
10-630907-015	10-633127-15M	10-113110-161	1.250	1.0000	8.125 INCHES (.677 FT)
10-630907-017	10-633127-17M	10-113110-191	1.438	1.1875	8.125 INCHES (.677 FT)
10-630907-019	10-633127-19M	10-113110-201	1.500	1.2500	8.125 INCHES (.677 FT)
10-630907-021	10-633127-21M	10-113110-221	1.625	1.3750	8.25 INCHES (.688 FT)
10-630907-023	10-633127-23M	10-113110-241	1.750	1.5000	8.25 INCHES (.688 FT)
10-630907-025	10-633127-25M	10-113110-261	1.875	1.6250	8.375 INCHES (.699 FT)

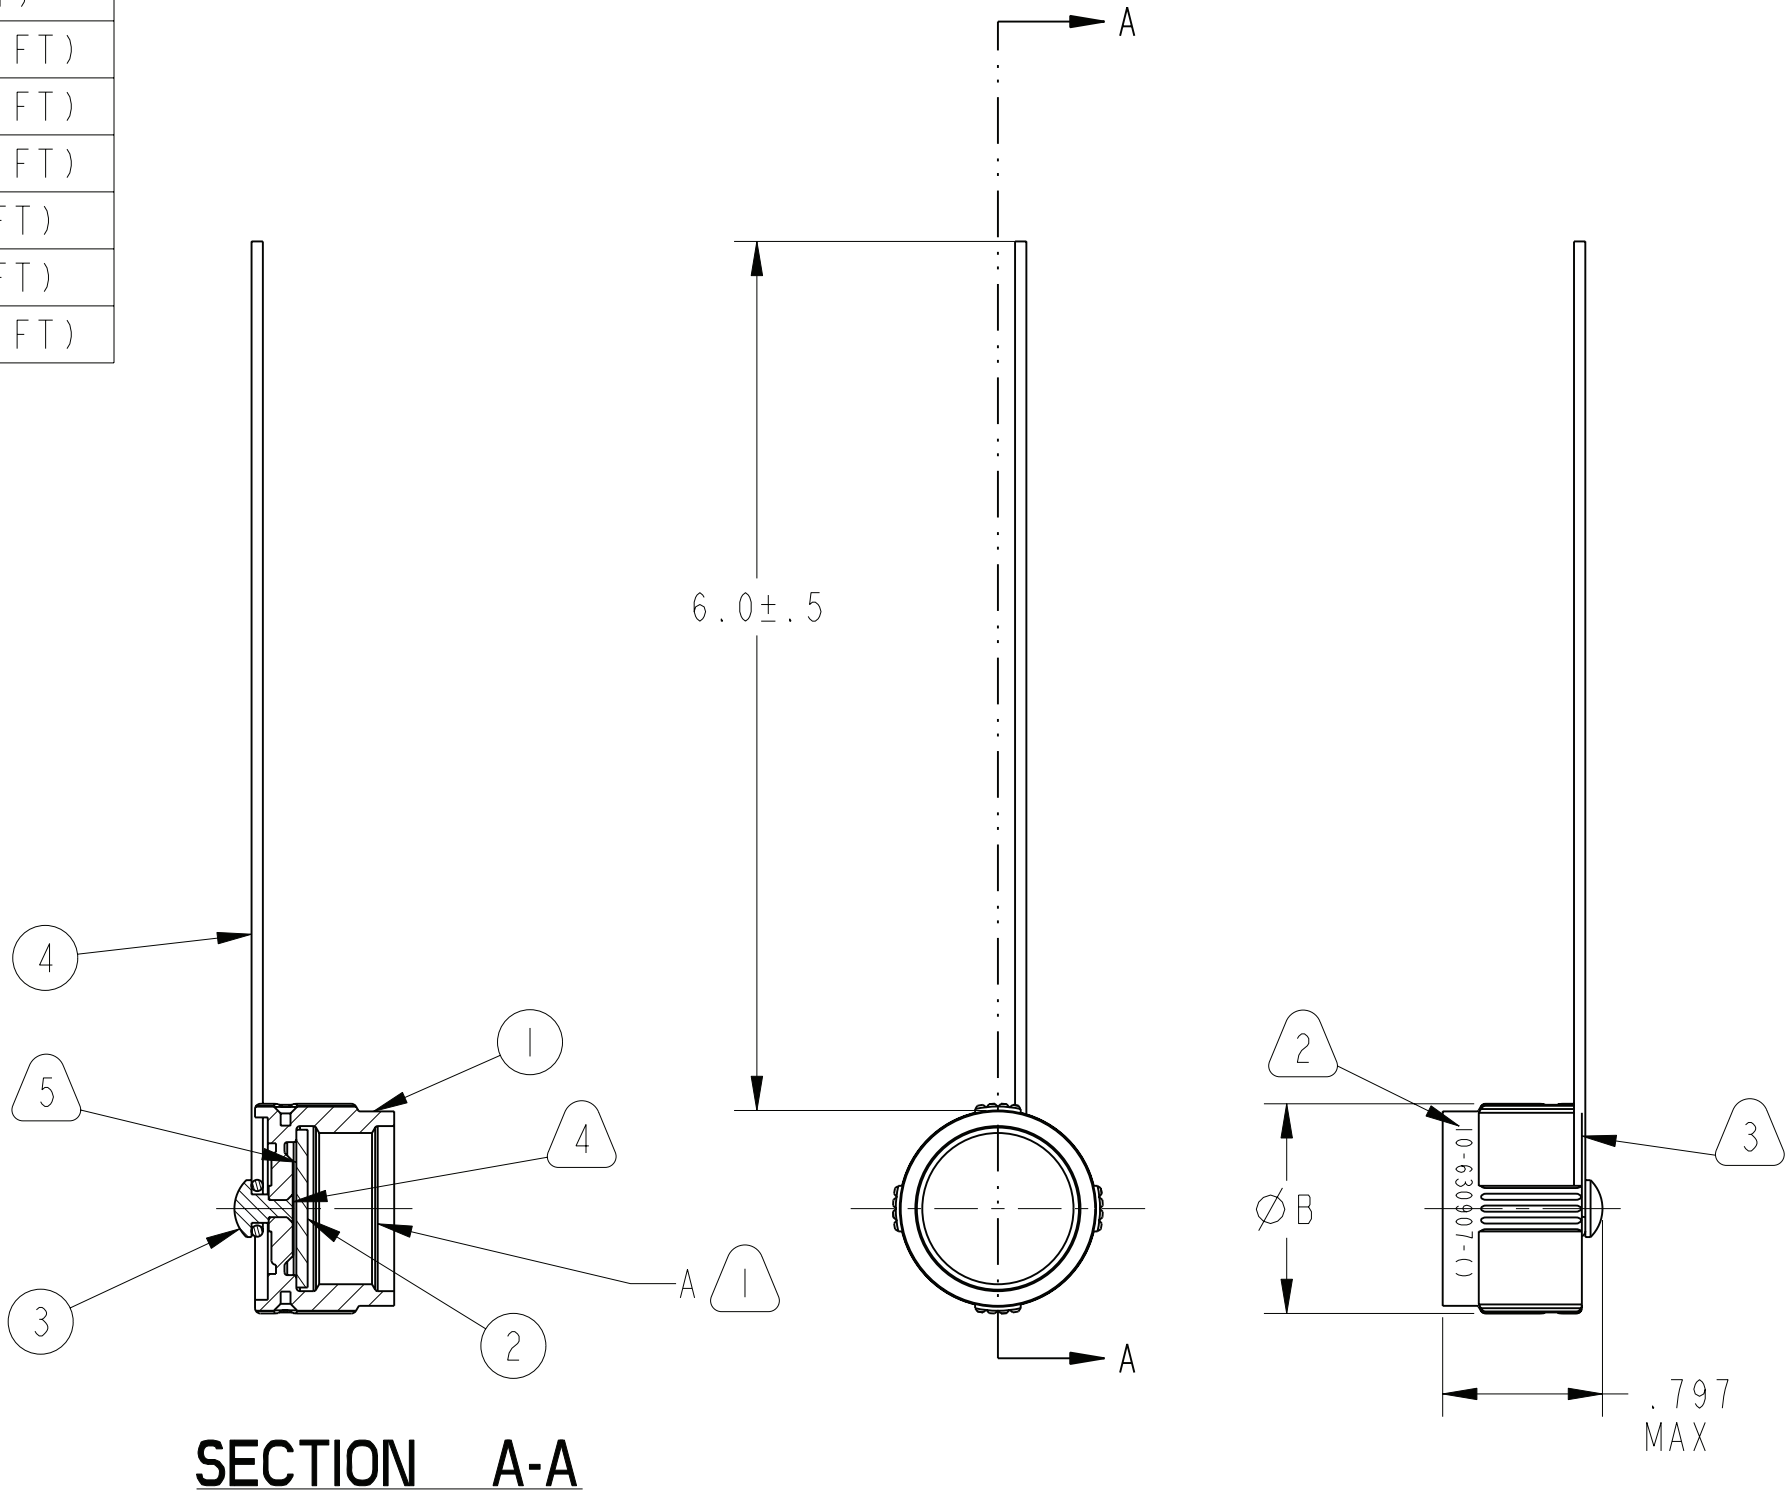

5. PRIOR TO BONDING, THE INDICATED SURFACES OF THE CAP SHALL BE CLEANED AND BE FREE FROM DIRT, OILS, AND SOLVENT. DO NOT VAPOR DEGREASE.
4. CORD MUST MOVE FREELY ON PROTECTIVE CAP AFTER ASSEMBLY. ANY CRACKS IN THE WEB ARE NOT ACCEPTABLE.
3. TRIM END OF CORD TO .50 ±.25 FROM KNOT AFTER KNOT IS DRAWN TIGHT.
2. WHITE INK STAMP "AMPHENOL" AND ASSEMBLY NUMBER PER 9-3856-5. CHARACTERS TO BE APPROX .062 HIGH.
1. APPLY LUBRICANT (9-7730) TO THREADS. ENTIRE INTERIOR MAY BE LUBRICATED.

NOTES:

THE USE OF THIS DOCUMENT IS UNLIMITED. HOWEVER, DOCUMENTS REFERENCED HEREON MAY CONTAIN LIMITED RIGHTS DATA.

PRO/ENGINEER INFORMATION
Pro/e Model Used: 10-630908.2.ASSEM
Drawing Name: 10-630907

UNLESS OTHERWISE SPECIFIED	SPECIFICATIONS	APPROVALS	DATE	PARTS LIST
LINEAR DIMENSIONS ARE IN INCHES TOLERANCES: .XXXX = ±.0005 ANGLES= ±2° .XXX = ±.010 .XX = ±.03 .X = ±.1	MATERIAL SPEC. N/A	PREPARED BY L SWEET ENGINEER IN CHARGE R BARNES DESIGN MANAGER D GALLUSSER DESIGN ACTIVITY GROUP C & I	20-Apr-04	AMPHENOL CORPORATION 40-60 DELAWARE AVENUE SIDNEY, N.Y. 13838
DIM. & TOL. PER ASME Y14.5M; DRM PER MIL-DTL-31000; OTHER Amphenol Sids. PER 9-3800	PROCESS SPEC. SEE NOTE 5 9-7730 9-3856-5, 9-7876	THIRD ANGLE PROJECTION		CAP, PROTECTIVE, RECEPTACLE, WITH NYLON 6.0" BRAID TYPE AL, COMPOSITE, UNPLATED
				SCALE: NONE

REV.	SHEET 1 OF 1	DOCUMENT NO. 10-630907-(-)
REVISIONS		
LTR	DESCRIPTION	DATE
A	INITIAL RELEASE NUM: 01486	21-Apr-2004
B	REPLACED RIVET. SEE ECN: 95065.	13-Sep-2004
C	(CL 11) SEE ECN 95648	13-June-2007
D	(CL 11) CLARIFY CORD LENGTH ECN: A5901	4-20-09 H.BROOKER

RELEASE STATE	REVISION	VERSION
ECN	D	0

SHEET 1 OF 1

10-630907-(-)

TAB.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[10-630907-011](#)