

PRODUCT DATA DRAWING

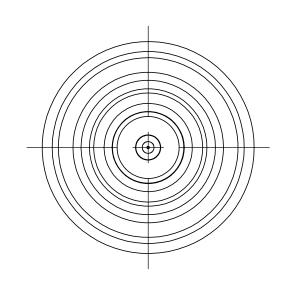

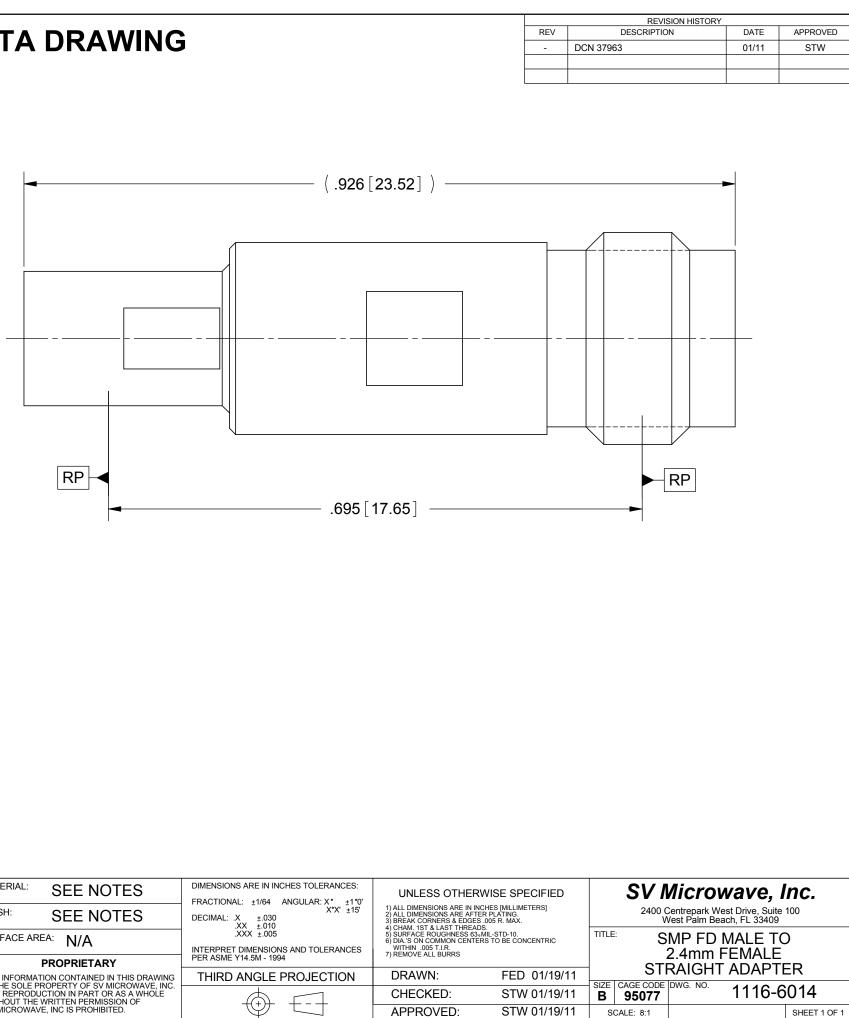

MATERIAL:

SMP BODY, 2.4mm BODY &		
IMPEDANCE SLEEVE:	STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1	
CONTACTS:	BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04	
INSULATOR:	PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B	
INSULATOR:	KEL-F (POLYCHLOROTRIFLUOROETHYLENE) PER ASTM D1430	
FINISH:		
SMP BODY &		

IMPEDANCE SLEEVE: PASSIVATED PER AMS-2700.

2.4mm BODY & CONTACTS: GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: FREQ. RANGE:

50 OHMS DC TO 40.0 GHz

MATERIAL: SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: +1/64 ANGULAR: X* +1°0'	UNLES
FINISH: SEE NOTES	DECIMAL: X ±.030 .XX ±.010	1) ALL DIMENSIO 2) ALL DIMENSIO 3) BREAK CORN 4) CHAM, 1ST &
SURFACE AREA: N/A	.XXX ±.005	5) SURFACE RO 6) DIA.'S ON CO WITHIN .005 7) REMOVE ALL
PROPRIETARY	PER ASME Y14.5M - 1994	7) REMOVE ALL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.	THIRD ANGLE PROJECTION	DRAWN
		CHECKE
		APPRO\

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: <u>1116-6014</u> SF1116-6014