





1 2 3 4 5 6 7 8

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-790211	2007/09/13	WUFEI	Change Nut
C	LEN-920168~71	2008/09/29	Li Xiu Zhi	Change Front View
D	LEN1710144~47	2017/01/17	Ruru	Change Logo

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

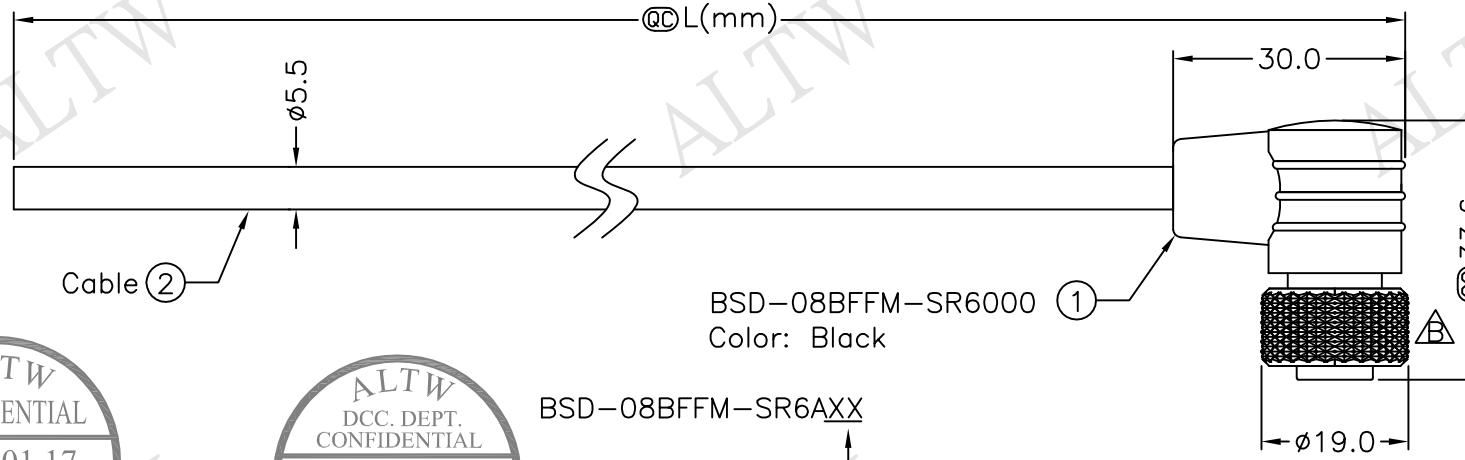

Pin Assignments
Front View

Shield	Drain	地線
8	Green	綠
7	Yellow	黃
6	Orange	桔
5	Red	紅
4	Blue	藍
3	White	白
2	Brown	棕
1	Black	黑
Conn.	Wire Color	
	Pin Out	△

Cable Length(L):01~99Meters

- Note:
- * @Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: Black, UL2464 24AWG*8C+Drain+Al/My (UV Resistant), OD=5.5
 - * Cable Length Tolerance: 01M:40mm
02M~05M:60mm
06M~10M:100mm
11M~30M:200mm
31M~99M:500mm

UNIT:mm		TITLE Standard, Cable Screw 8Pin F Conn F Pin			ITEM NO	DRAWN BY	DATE
TOLERANCE ±0.5 mm			DWG NO BSD-08BFFM-SR6AXX			Ruru	2017/01/17
SCALE Free			CHECKED BY Rita				
REV. D			SHEET 1 OF 1				
SIZE A4			@C :Inspection Item			CUSTOMER ALTW	APPROVED BY Max
							DATE 2017/01/17

Amphenol LTW
安費諾亮泰企業股份有限公司

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[BSD-08BFFM-SR6A01](#) [BSD-08BFFM-SR6A02](#) [BSD-08BFFM-SR6A05](#) [BSD-08BFFM-SR6A10](#) [BSD-08BFFM-SR6A04](#) [BSD-08BFFM-SR6A03](#)