


REV	ECN NO	DATE	SIGN	DESCRIPTION
D	C201786	2020-11-17	Ruru	$\triangle D$ x3
E	C210237	2021-03-30	Ruru	$\triangle E$ x1
F	C221951	2022-12-16	Ruru	$\triangle F$ x1

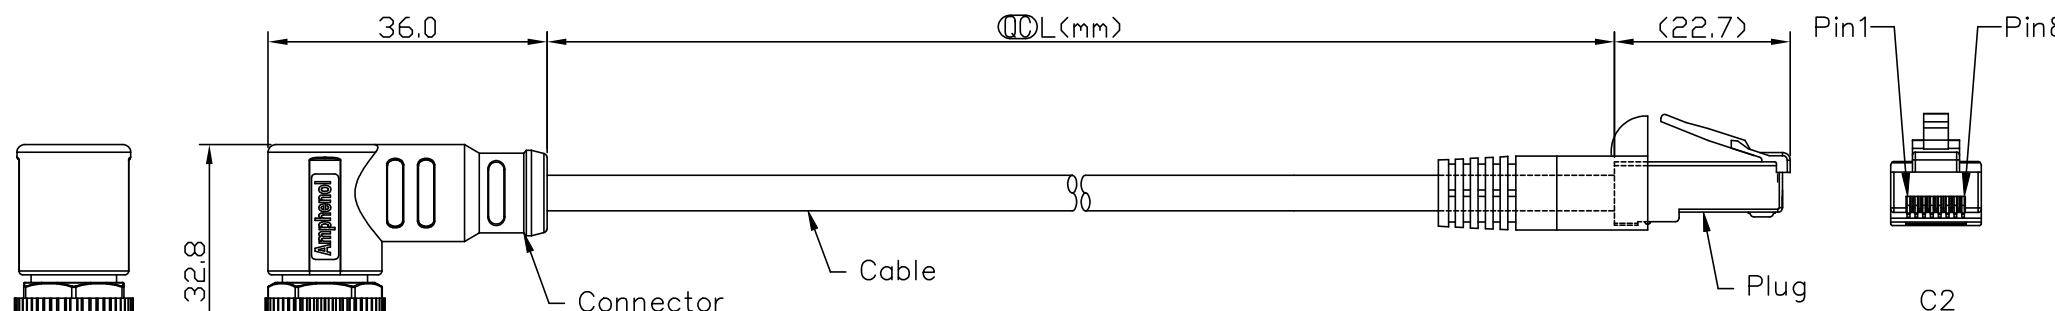


- Note: $\triangle B$ $\triangle C$ $\triangle D$ $\triangle E$
- * RoHS Compliant
 - * ϕ Important dimension
 - * C1
 - $\triangle E$ Waterproof rate: IP68, mated 1m/24h
IP69K, mated
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Nut: Metal
 - Shield: Metal
 - Outer mold: Thermoplastic, Black
 - * C2
 - Waterproof rate: Non-Waterproof
 - Plug: RJ45, Shielded
 - * Cable: CAT-5E, FTP, 22#*2P+AI/MY+D, OD=6.2mm, PU Jacket, Black
 - * Cable length tolerance: $0.5M < L \leq 1M$: +60/-0 mm
 $1M < L \leq 3M$: +120/-0 mm
 $3M < L \leq 5M$: +160/-0 mm
 $5M < L \leq 10M$: ± 100 mm
 $10M < L \leq 20M$: ± 200 mm
 $20M < L \leq 30M$: ± 300 mm
 $30M < L \leq 40M$: ± 500 mm

$\triangle D$
MSDSXXMR-SPBML-SEXXX

XX: No. Of Pin

XXX: 0.5~40Meters
A05: 0.5Meter
001: 01Meter
002: 02Meters
:
040: 40Meters

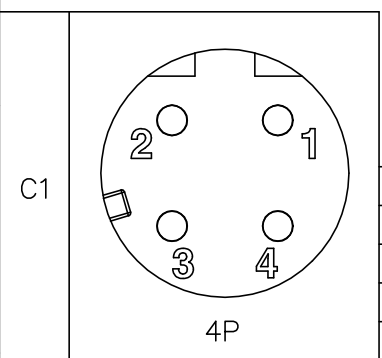

Shield	Drain	地線	Shield
4	Green	綠	6
2	White/Green	白/綠	3
3	Orange	橘	2
1	White/Orange	白/橘	1
C1	Wire Color		C2
Pin Out			

Twist

Twist

UNIT: mm		TITLE ACC, SEN, D Code, DB-ENDED
TOLERANCE ± 0.5 mm	SCALE Free	SHEET 1 OF 1
REV. F	SIZE A4	QC: Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Allen Pan	DATE 2020-05-11
DWG NO $\triangle D$ MSDSXXMR-SPBML-SEXXX	CHECKED BY Sam Ho	DATE 2020-05-11
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2020-05-11

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[MSDS04MR-SPBML-SE010](#) [MSDS04MR-SPBML-SE001](#) [MSDS04MR-SPBML-SEA05](#) [MSDS04MR-SPBML-SE005](#)
[MSDS04MR-SPBML-SE004](#) [MSDS04MR-SPBML-SE002](#) [MSDS04MR-SPBML-SE003](#)