


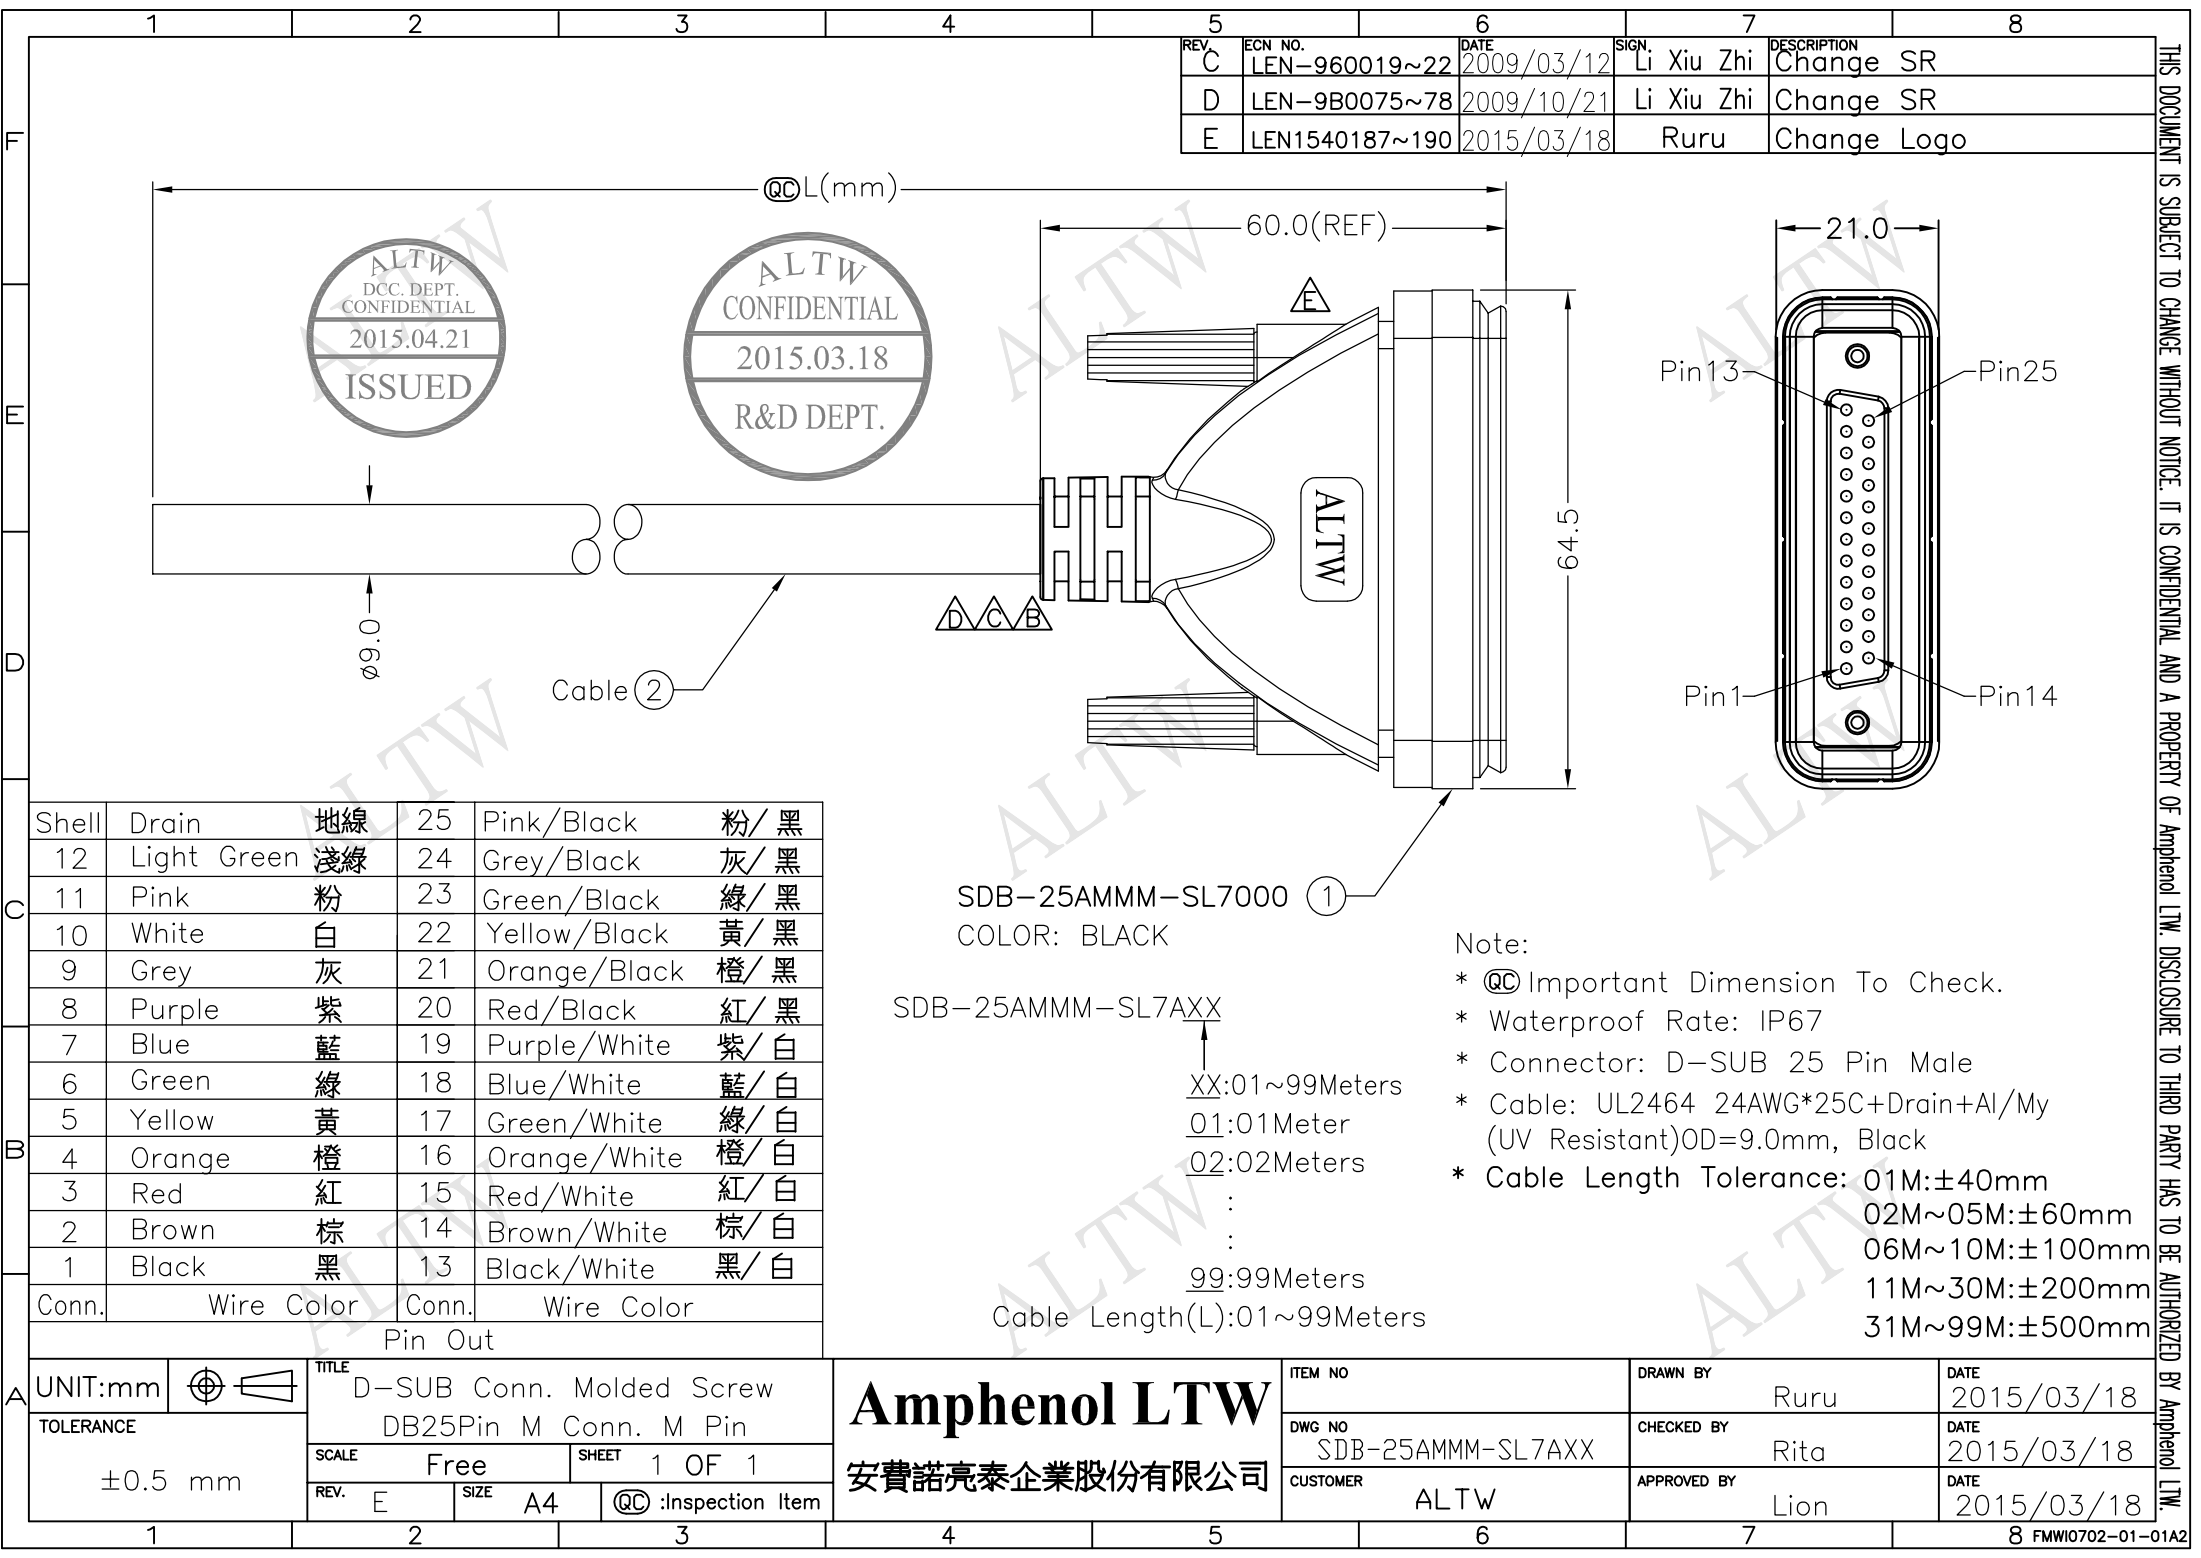

REV.	ECN NO.	DATE	SIGN.	DESCRIPTION
C	LEN-960019~22	2009/03/12	Li Xiu Zhi	Change SR
D	LEN-9B0075~78	2009/10/21	Li Xiu Zhi	Change SR
E	LEN1540187~190	2015/03/18	Ruru	Change Logo

Shell	Drain	地線	25	Pink/Black	粉/ 黑
12	Light Green	淺綠	24	Grey/Black	灰/ 黑
11	Pink	粉	23	Green/Black	綠/ 黑
10	White	白	22	Yellow/Black	黃/ 黑
9	Grey	灰	21	Orange/Black	橙/ 黑
8	Purple	紫	20	Red/Black	紅/ 黑
7	Blue	藍	19	Purple/White	紫/ 白
6	Green	綠	18	Blue/White	藍/ 白
5	Yellow	黃	17	Green/White	綠/ 白
4	Orange	橙	16	Orange/White	橙/ 白
3	Red	紅	15	Red/White	紅/ 白
2	Brown	棕	14	Brown/White	棕/ 白
1	Black	黑	13	Black/White	黑/ 白
Conn.	Wire Color	Conn.	Wire Color	Pin Out	

UNIT:mm		TITLE
TOLERANCE		D-SUB Conn. Molded Screw
±0.5 mm		DB25Pin M Conn. M Pin
	SCALE	SHEET
	Free	1 OF 1
	REV.	SIZE
	E	A4
		QC :Inspection Item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	Ruru	2015/03/18
SDB-25AMMM-SL7AXX	CHECKED BY	DATE
CUSTOMER	Rita	2015/03/18
ALTW	APPROVED BY	DATE
	Lion	2015/03/18

- Note:
- * $\textcircled{QC}$ Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Connector: D-SUB 25 Pin Male
 - * Cable: UL2464 24AWG*25C+Drain+Al/My (UV Resistant)OD=9.0mm, Black
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

SDB-25AMMM-SL7AXX
↑
XX:01~99Meters
01:01Meter
02:02Meters
:
:
99:99Meters
Cable Length(L):01~99Meters

SDB-25AMMM-SL7000 ①
COLOR: BLACK

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[SDB-25AMMM-SL7A03](#) [SDB-25AMMM-SL7A05](#) [SDB-25AMMM-SL7A01](#) [SDB-25AMMM-SL7A02](#) [SDB-25AMMM-SL7A10](#) [SDB-25AMMM-SL7A04](#)