
ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY				
REV	DESCRIPTION	DATE	APPROVED	
М	DCN 41797	10/15	DAL	



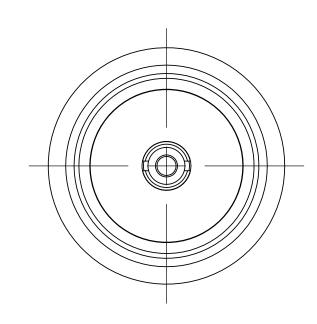

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1 BODY:

BERYLLIUM COPPER PER ASTM B196, CONTACT:

ALLOY No. UNS C17300, TD04

INSULATORS: PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

GLASS: **EN1 OR EQUIVALENT**

PIN: **KOVAR**

FINISH:


GLASS SEAL ASSEMBLY &

GOLD PER ASTM B488, TYPE II, CODE C, CLASS .76, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN. CONTACT:

PERFORMANCE:

50 OHMS

IMPEDANCE: FREQ. RANGE: DC TO 18.0 GHz

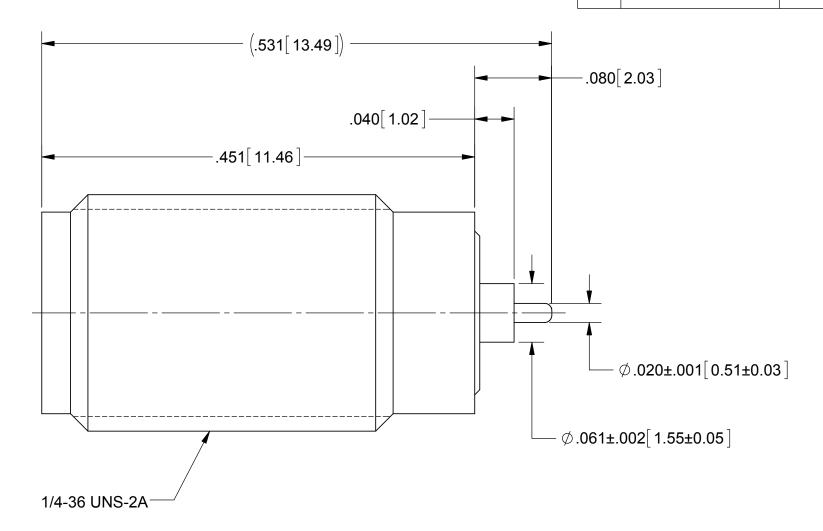

MATERIAL: S	SEE NOTES				
FINISH: S	SEE NOTES				
SURFACE AREA:	N/A				
PROPRIETARY					
IS THE SOLE PROPE ANY REPRODUCTION	CONTAINED IN THIS DRAWIN ERTY OF SV MICROWAVE, IN IN IN PART OR AS A WHOLE ITEN PERMISSION OF C IS PROHIBITED.				

	DIMENSIONS ARE IN INCHES TOLERANCES:
	FRACTIONAL: ±1/64 ANGULAR: X° ±1°C X°X' +15'
	DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005
	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994
3	THIRD ANGLE PROJECTION

UNLESS OTHER\	WISE SPECIFIED			
1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63.MIL-STD-10. 6) DIA'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.J.R. 7) REMOVE ALL BURRS				
DRAWN:	BNK 10/29/15			

CHECKED:

APPROVED:



SMA JACK HERMETIC SEAL

DAL 10/29/15	SIZE B	95077	DWG. NO. 2975-	6200
DGG 12/19/75	S	CALE: 10:1		SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

1211-4000 2975-6200