
ROHS COMPLIANT	
----------------	--

### PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 46496	06/17	GPF

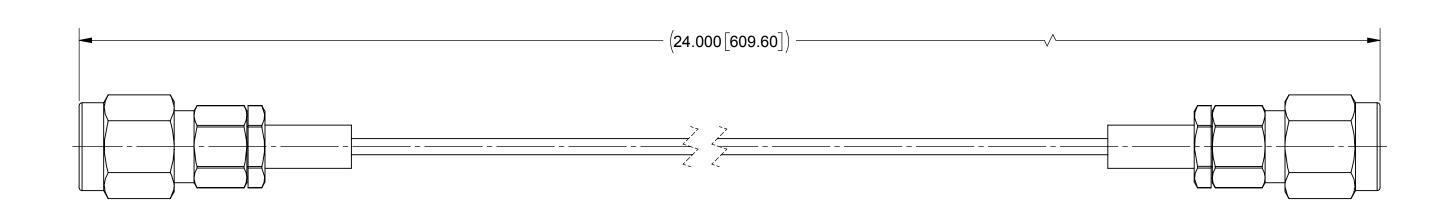

### MATERIAL:

**CONNECTORS:** 2X 2.92mm STRAIGHT PLUG (SF1511-60069)

STANDARD FLEXTRA CABLE (200-70-214) CABLE:

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 40.0 GHZ

MATERIA	SEE NOTES
FINISH:	SEE NOTES

SURFACE AREA: N/A

#### PROPRIETARY

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15'

DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

DRAWN: THIRD ANGLE PROJECTION CHECKED:

# UNLESS OTHERWISE SPECIFIED

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING.
3) BREAK CORNERS & EDGES .005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63 MIL-STD-10.
6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R.
7) REMOVE ALL BURRS

VB 06/02/17 GPF 06/02/17 APPROVED: GPF 06/02/17



TITLE: 2.92mm MALE TO 2.92mm MALE FOR .047 CABLE **ASSEMBLY** 

7015-0802 B 95077 SCALE: 1:1

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Amphenol</u>: 7015-0802