

PRODUCT DATA DRAWING



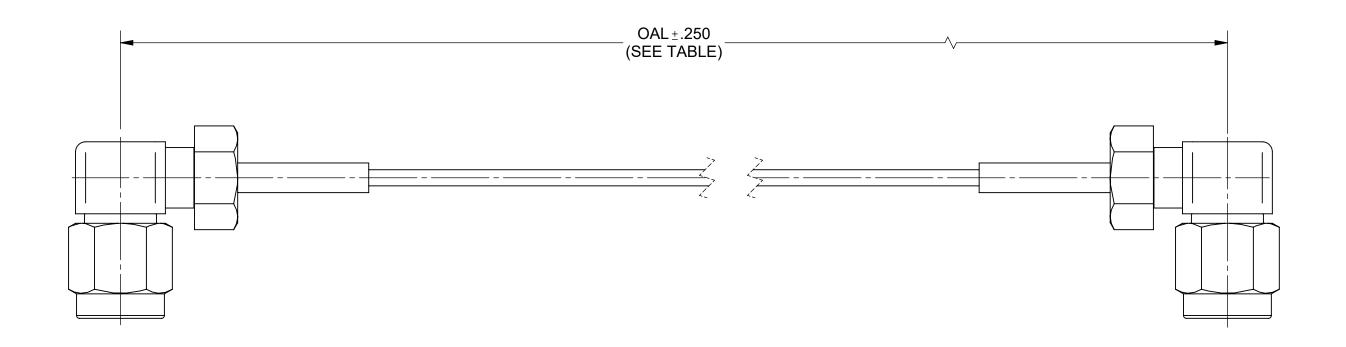

MATERIAL:

CONNECTORS: 2X 2.92mm MALE R/A (SF1512-60028)

CABLE: FLEXIBLE Ø.047 CABLE

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 40.0 GHz

				SV P/N	UAL
				7015-0990	6.000
				7015-0991	12.000
RIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:	UNLESS OTHERWISE SPECIFIE	ED S	Amphenol

APPROVED:

MKK 1/29/20

FRACTIONAL: ±1/64 ANGULAR: X* ±1*0'	
DECIMAL: .X ±.030XX ±.010XX ±.010XXX ±.005	1) ALI 2) ALI 3) BR 4) CH 5) SU 6) DIA
INTERPRET DIMENSIONS AND TOLERANCES	7) RE
PER ASME Y14.5M - 1994	7)11

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	
THIRD ANGLE PROJECTION	DRAWN:	SJ 01/22/20
\$	CHECKED:	MKK 1/29/20

MICROWAVE www.svmicrowave.com		
TITLE:		

2.92mm R/A MALE TO 2.92mm R/A MALE Ø.047 CABLE ASSEMBLY

B DWG. NO.		7015-09	90-0991	
SCALE: 3:1			SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

7015-0990 7015-0991