



1	2	3	4	5	6	7	8
F				REV. C D E	ECN NO. LEN-7A0219 LEN-920061~064 LEN1620154~158	DATE 2007/10/09 2009/02/03 2016/02/01	SIGN Ferds Vicky Ruru
E							DESCRIPTION Add Logo On The Connector. Update the drawing. Change Logo
D							

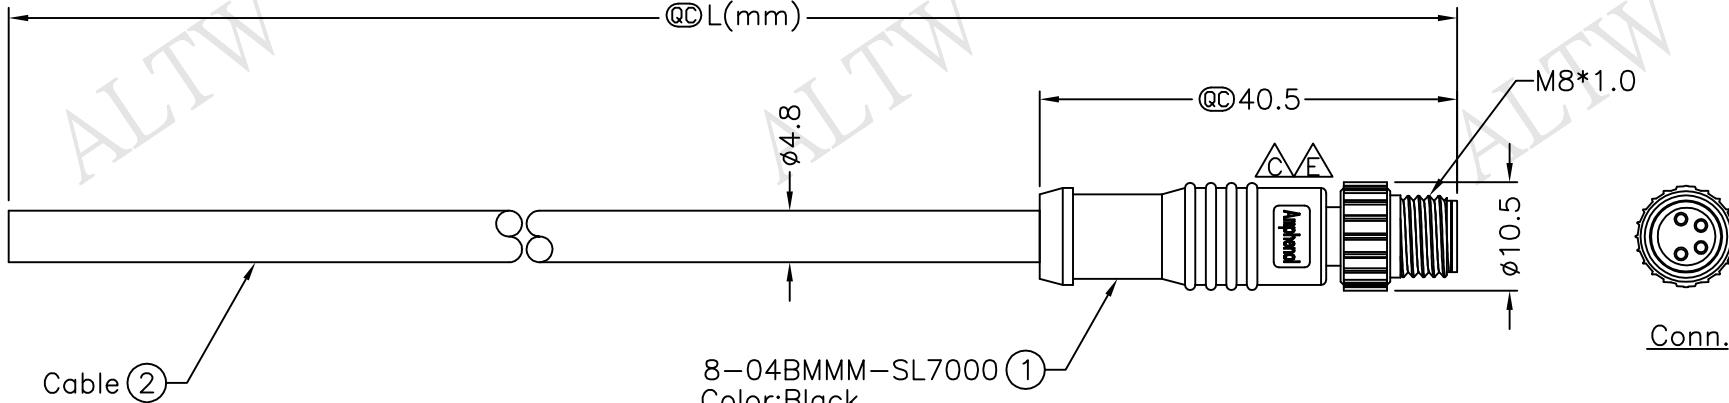


8-04BMMM-SL7BXX
 XX:01~99Meters
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

Notes:

- * QC Important Dimension.
- * Waterproof Rate: IP67.
- * Connector: PU, Black.
- * Male Pin: Copper Alloy, Gold Plated.
- * Cable: 22AWG*4C+Insulation, PU, OD=4.8mm, Black.
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

△ * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

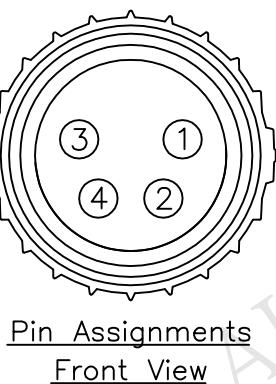

UNIT:mm		TITLE △ M8 Conn
TOLERANCE		Cable Screw 4P M Conn M Pin
±0.5 mm		SCALE Free
		SHEET 1 OF 1
	REV. E	SIZE A4
		QC :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
8-04BMMM-SL7BXX	Ruru	2016/02/01
CUSTOMER	CHECKED BY	DATE
ALTW	Rita	2016/02/01
	APPROVED BY	DATE
	Lisa	2016/02/01

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[8-04BMMM-SL7B01](#) [8-04BMMM-SL7B10](#) [8-04BMMM-SL7B05](#) [8-04BMMM-SL7B02](#)