



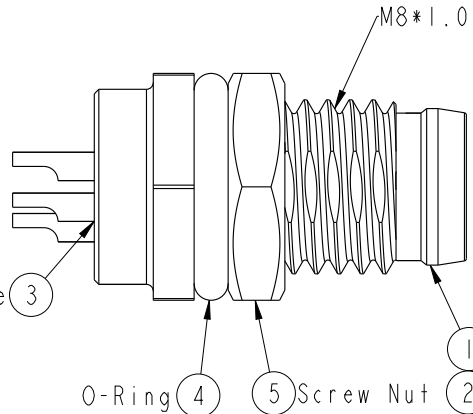
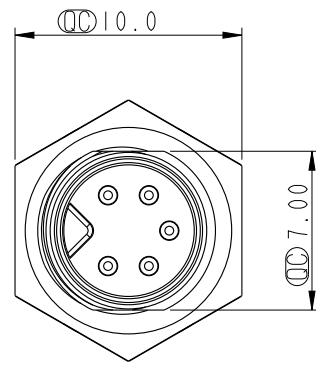
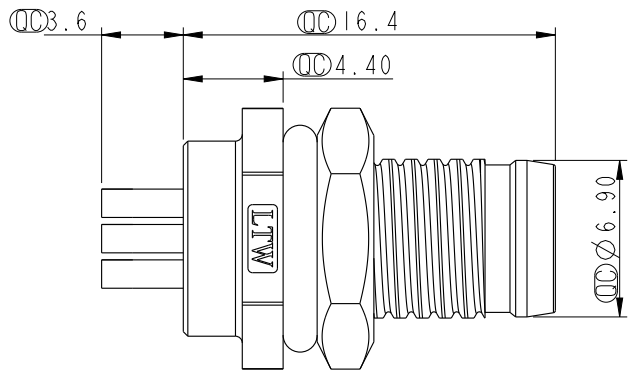


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION

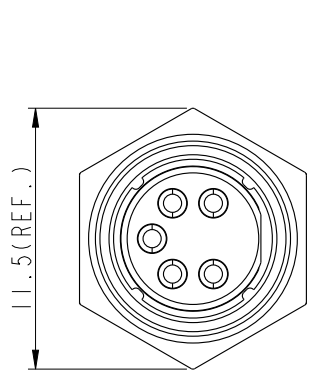

Pin Assignment
Front View



Recommended
Panel Cut-Out

- Note:
- * $\varnothing$ Important Dimension.
 - * Waterproof Rate: IP67.
 - * Housing: Nylon+GF, Black.
 - * Male Pin: Copper Alloy, Gold Plated.
 - * Shield: Zinc Alloy, Nickel Plated.
 - * Screw Nut: Copper Alloy, Nickel Plated.
 - * O-Ring: EPDM, Black.
 - * For Panel Thickness Max 3.0mm.
 - * Nut Torque: 4~6 kgf.cm.

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
TOLERANCE		M8 5Pin Panel M Conn. M Pin		8A-05PMMS-SF7001		Mila		2013-12-19	
.X	±0.25	SCALE	3:1	SIZE	A4	DWG NO	8A-05PMMS-SF7001	CHECKED BY	Jimmy
.XX	±0.1	REV.	A	WC-REV.	A.3	CUSTOMER	ALTW	APPROVED BY	Jerry
.XXX	±0.05	SHEET 1 OF 1		DATE		DATE		DATE	
ANGLES	±1°	QC: Inspection item		2013-12-19		2013-12-19		2013-12-19	

Amphenol LTW
安費諾亮泰企業股份有限公司

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[8A-05PMMS-SF7001](#)