

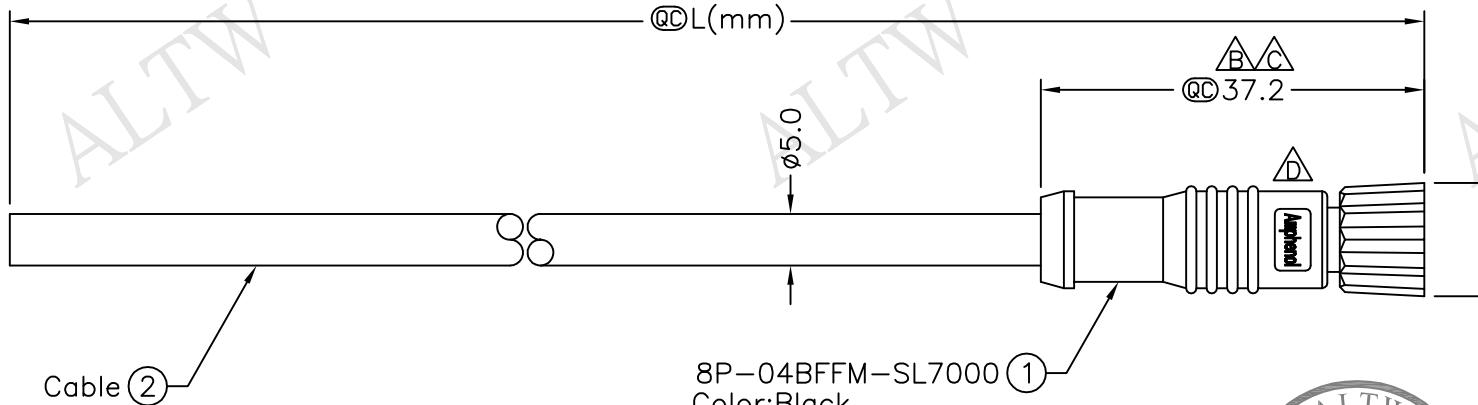


1	2	3	4	5	6	7	8
F				REV. B ECN NO. LEN-7B0151 DATE 2007/11/22 SIGN Zhong Qin DESCRIPTION Change Dimension.			
E				C LEN-920307~3102009/02/09 Vicky Update the drawing.			
D				D LEN1620222~2262016/02/01 Ruru Change Logo			



Conn.



Pin Assignments
Front View



4	Black	黑
3	Blue	藍
2	White	白
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

Cable Length(L):01~99Meters

8P-04BFFM-SL7AXX
XX:01~99Meters
01:01Meter
02:02Meters
:
:
99:99Meters

Notes:

- * @C Important Dimension.
- * Waterproof Rate:IP67.
- * Connector:Black,PU.
- * Female Pin:Copper Alloy,Gold Plated.
- * Cable:UL2464 22AWG*4C+Talcum,Black, PVC Jacket,UV Resistant,OD=5.0mm.
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm



UNIT:mm		TITLE: M8 Conn			
TOLERANCE		Cable Screw 4P F Conn F Pin			
±0.5 mm		SCALE Free			
		SHEET 1 OF 1			
REV. D	SIZE A4	@C :Inspection Item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	Ruru	2016/02/01
8P-04BFFM-SL7AXX	Rita	2016/02/01
CUSTOMER	APPROVED BY	DATE
ALTW	Lisa	2016/02/01

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[8P-04BFFM-SL7A01](#) [8P-04BFFM-SL7A02](#) [8P-04BFFM-SL7A05](#) [8P-04BFFM-SL7A10](#)