


T H E R M O M E T R I C S  
A C O M M I T M E N T T O E X C E L L E N C E

# NTC Thermistors Type RL30

## Uncoated Disc With Radial Leads

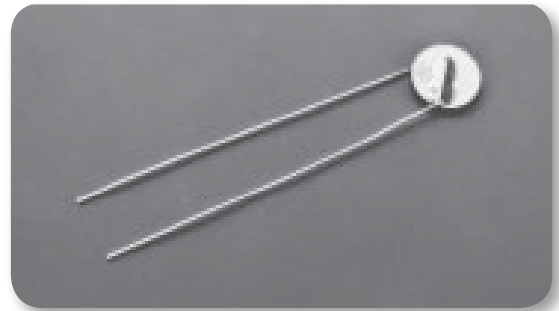

### Description

Point-matched disc thermistor with bare lead-wires.

### Features


- Low cost solid state sensor
- Resistance tolerances down to  $\pm 2\%$
- High sensitivity to changes in temperature
- Suitable for temperature measurement, control and compensation
- Excellent mechanical strength
- Wide operating temperature range:  $-58^{\circ}\text{F}$  to  $302^{\circ}\text{F}$  ( $-50^{\circ}\text{C}$  to  $150^{\circ}\text{C}$ )
- Suitable for PCB and probe mountings
- Available in a wide range of material systems
- Also available with epoxy coating.
- Available on tape and reel to EIA RS-468A for automatic insertion

**Amphenol**  
**Advanced Sensors**

# Type RL30 Specifications

Type Number	Ro@25°C Ω	Material Systems	Beta 25/85	B		δ	τ
				in	mm	(mW/K)	(sec.)
RL3004-6.56-59-M	10	D5.9	3096	.130	3.30	7.0	35
RL3006-9.84-59-M	15	D5.9	3096	.150	3.81	7.5	45
RL3008-13.1-59-M	20	D5.9	3096	.170	4.32	8.0	50
RL3004-31.2-73-K	75	D7.3	3468	.130	3.30	7.0	35
RL3005-44.5-85-K	75	D8.5	3772	.140	3.56	7.0	35
RL3006-59.4-85-K	100	D8.5	3772	.150	3.81	7.5	45
RL3004-144-95-K	250	D9.5	3965	.130	3.30	7.0	35
RL3006-231-95-K	400	D9.5	3965	.150	3.81	7.5	45
RL3004-291-97-K	500	D9.7A	3972	.130	3.30	7.0	35
RL3006-436-97-K	750	D9.7A	3972	.150	3.81	7.5	45
RL3004-459-103-K	800	D10.3	4073	.130	3.30	7.0	35
RL3005-574-103-K	1K	D10.3	4073	.140	3.56	7.0	35
RL3007-861-103-K	1.5K	D10.3	4073	.160	4.06	7.5	40

Type Number	Ro@25°C Ω	Material Systems	Beta 25/85	B		δ	τ
				in	mm	(mW/K)	(sec.)
RL3005-1100-120-K	2K	D12.0	4356	.140	3.56	7.0	35
RL3006-1377-120-K	2.5K	D12.0	4356	.150	3.81	7.5	45
RL3008-1652-120-K	3K	D12.0	4356	.170	4.32	8.0	50
RL3004-2214-122-K	4K	D12.2	4365	.130	3.30	7.0	35
RL3005-2768-122-K	5K	D12.2	4365	.140	3.56	7.0	35
RL3006-5340-140-K	10K	D14.0	4615	.150	3.81	7.5	45
RL3008-8010-140-K	15K	D14.0	4615	.170	4.32	8.0	50
RL3004-7900-150-K	15K	D15.0	4728	.130	3.30	7.0	35
RL3004-10.8K-138-K	20K	D13.8	4561	.130	3.30	7.0	35
RL3006-10.5K-150-K	20K	D15.0	4728	.150	3.81	7.5	45
RL3005-13.1K-155-K	25K	D15.5	4783	.140	3.56	7.0	35
RL3006-16.2K-138-K	30K	D13.8	4561	.150	3.81	7.5	45
RL3006-15.7K-155-K	30K	D15.5	4783	.150	3.81	7.5	45

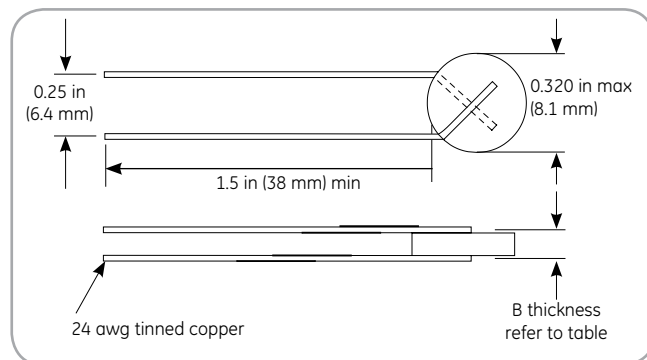

## Options

- Other resistances and tolerances at other temperatures available.
- Resistance tolerance codes: G = 2%
  - J = 5%
  - K = 10%
  - L = 15%
  - M = 20%
- Alternative lead lengths, lead materials, insulations
- The - "K" suffix is the same as the "DI" suffix in earlier catalogs

**Amphenol**  
Advanced Sensors

[www.amphenol-sensors.com](http://www.amphenol-sensors.com)

© 2014 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

AAS-920-414A-04/2014

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Amphenol:

[RL3006-10.5K-150-D1](#) [RL3004-144-95-D1](#) [RL3005-13.1K-155-D1](#) [RL3006-59.4-85-D1](#) [RL3006-436-97-D1](#) [RL3004-10.8K-138-D1](#) [RL3020-1000-100-240-PTO](#) [RL3005-1100-120-D1](#) [RL3004-7900-150-D1](#) [RL3005-44.5-85-D1](#)  
[RL3508-17-110-120-PT1](#) [RL3004-46.8-73-D1](#) [RL3005-2768-122-D1](#) [RL3006-5340-140-D1](#) [RL3020-1500-100-240-PTO](#) [RL3006-9.84-59-D1](#) [RL3006-15.7K-155-D1](#) [RL3008-1652-120-D1](#) [RL3004-291-97-D1](#) [RL3008-20-110-50-PTU](#) [RL3008-8010-140-D1](#) [RL3004-459-103-D1](#) [RL3007-861-103-D1](#) [RL3004-6.56-59-D1](#) [RL3005-574-103-D1](#) [RL3006-231-95-D1](#) [RL3006-1377-120-D1](#) [RL3004-2214-122-D1](#) [RL3008-13.1-59-D1](#) [RL3006-16.2K-138-D1](#) [RL3006-50-40-25-PTO](#) [RL3006-50-50-25-PTO](#)