



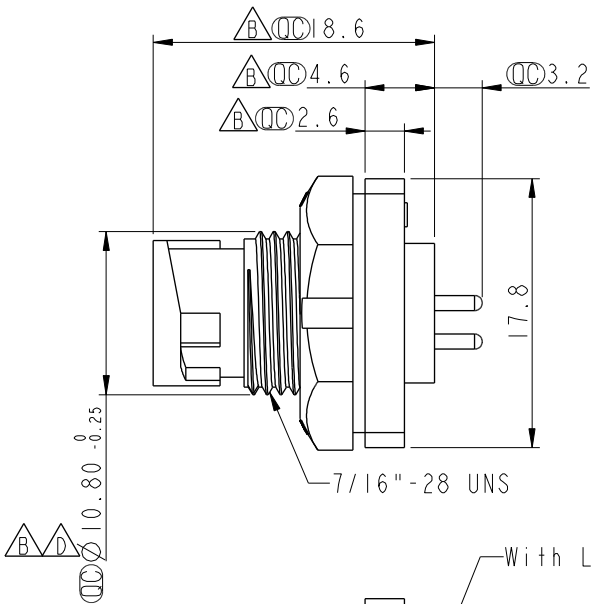



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN-9C0090	2009/12/15	Vicky	REF. TO ECR/N. NOTE.
E	LEN1741232	2017/04/13	Ruru	Change Logo
F	CI90268	2019/02/18	Ruru	Modify Note




PCB Layout



Pin Assignments Front View

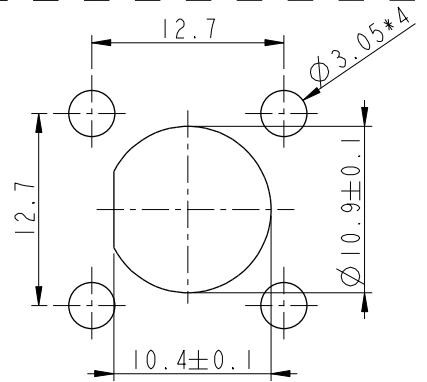

Recommended Panel Cut-Out

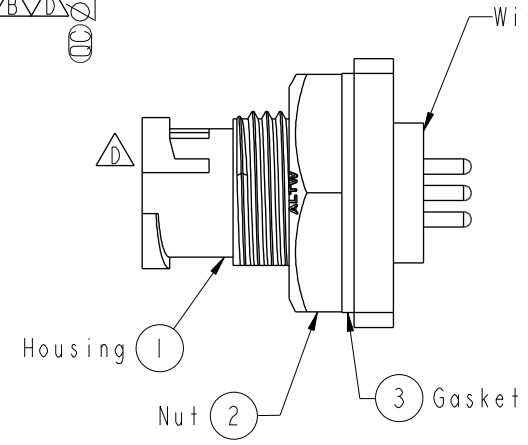

With Liquid Glue

Note: F

- * Important Dimension.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Shield: Metal, Nickel Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black
- * Use with waterproof cap or dust cap
Panel Thickness Max. 2.5mm.
- * Use without waterproof cap or dust cap
Panel Thickness Max. 3.5mm.
- * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
		Mini Panel Lock 3Pin M Conn. M Pin		ASD-03PMMP-LS7001		Ruru		2019-02-18	
TOLERANCE		SCALE		DWG NO		CHECKED BY		DATE	
.X ±0.25		2:1		ASD-03PMMP-LS7001		Rita		2019-02-18	
.XX ±0.1		SIZE		CUSTOMER		APPROVED BY		DATE	
.XXX ±0.05		A4		ALTW		Max		2019-02-18	
ANGLES ±1°		REV.							
		F							
		WC-REV.							
		A.2							
		QC: Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[ASD-03PMMP-LS7001](#)