
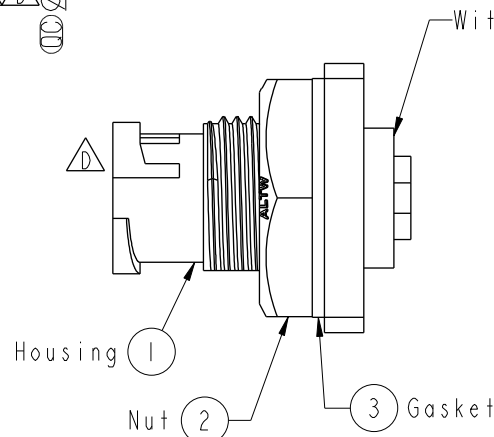
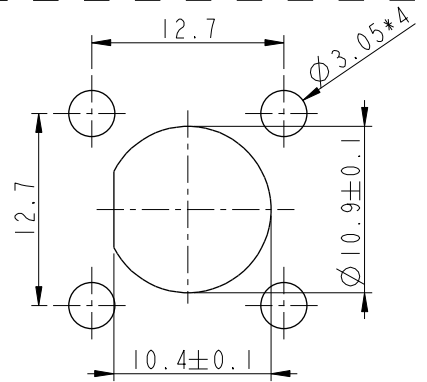


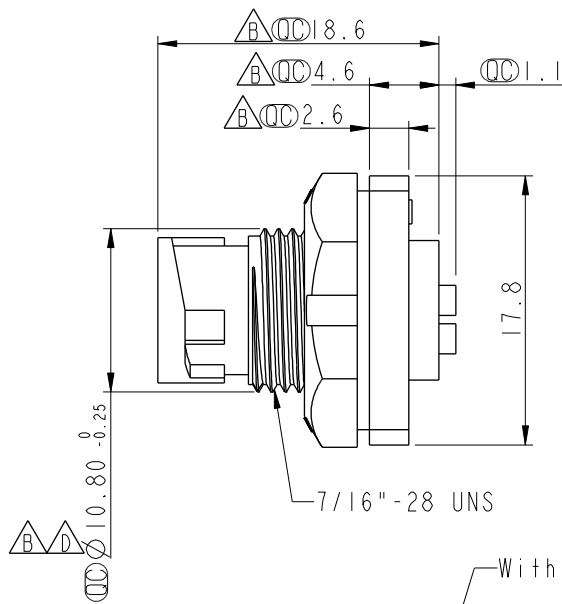


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN-9C0091	2009/12/15	Vicky	REF. TO ECR/N. NOTE.
E	LEN1741233	2017/04/13	Ruru	Change Logo
F	CI90268	2019/02/18	Ruru	Modify Note

ALTW
CONFIDENTIAL
2019-02-18
R&D DEPT.



- Note:
- * Important Dimension.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Shield: Metal, Nickel Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - * Use with waterproof cap or dust cap
Panel Thickness Max. 2.5mm.
 - * Use without waterproof cap or dust cap
Panel Thickness Max. 3.5mm.
 - * Gasket and Nut are packed separately
in PE bags.

UNIT:mm		TITLE Mini Panel Lock 3Pin M Conn. M Pin		ITEM NO ASD-03PMMS-LS7001		DRAWN BY Ruru		DATE 2017-04-13	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 2:1	SIZE A4	SHEET 1 OF 1	DWG NO ASD-03PMMS-LS7001	CHECKED BY Rita		DATE 2017-04-13	
REV. F		WC-REV. A.2	Inspection item		CUSTOMER ALTW	APPROVED BY Max		DATE 2017-04-13	

Amphenol LTW
安費諾亮泰企業股份有限公司

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[ASD-03PMMS-LS7001](#)