



REV	ECO	
А	-	

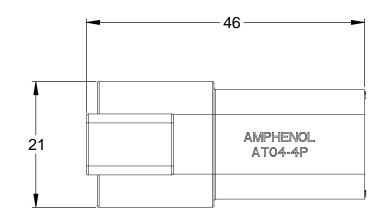

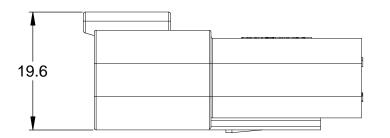



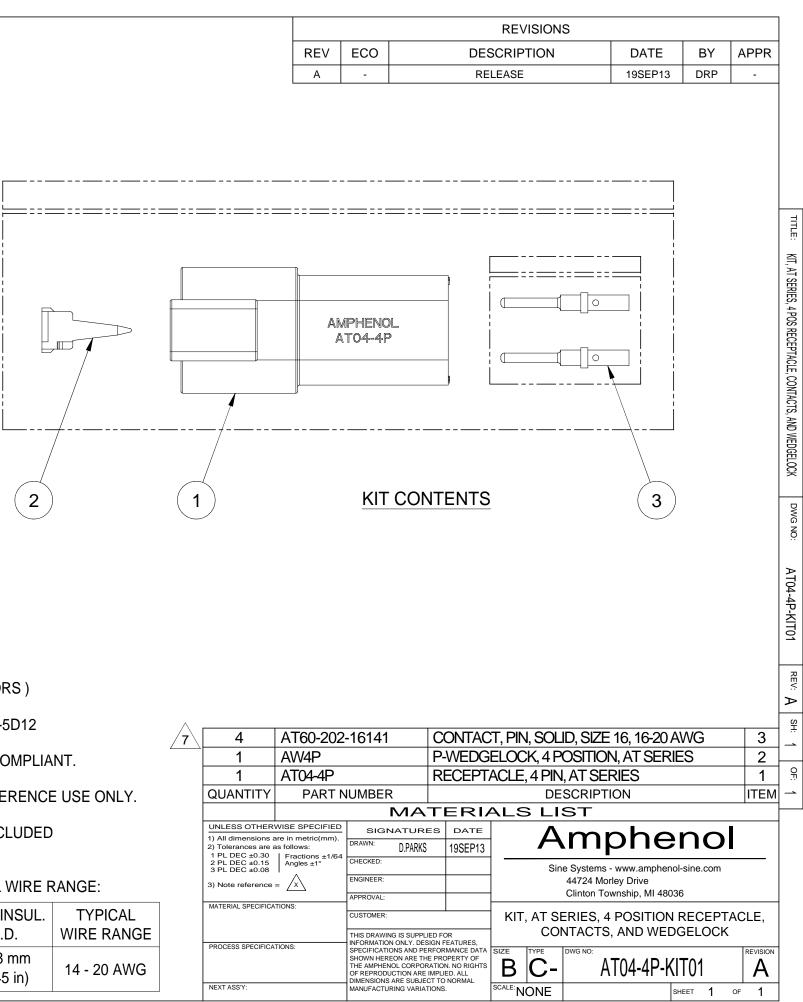

## **REFERENCE DIMENSIONS - ASSEMBLED**

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

HOUSING: THERMOPLASTIC; COLOR: GREY WEDGELOCK: THERMOPLASTIC; COLOR: GREEN SEALS: SILICONE RUBBER CONTACTS: COPPER ALLOY; NICKEL PLATED

- 2. SPECIFICATIONS:
  - 2.1 CURRENT RATING: 13 AMPS
  - 2.2 OPERATING TEMPERATURE: -55°C TO +125°C
  - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
  - 2.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C. 2.5 CONTACT MILLIVOLT DROP: 60 MILLIVOLT DROP @ 13 AMP TEST CURRENT.
  - 2.6 MOISTURE RESISTANCE: IP67 (MATED CONDITION) 2.7 CONNECTOR MATING CYCLE DURABILITY: 100 CYCLES

- 3. MATING PART: AT06-4S\* PLUG (\* = MODIFICATIONS AND COLORS)
- 4. AVAILABLE HAND CRIMPER: CA-5D12
- 5. ALL COMPONENTS ARE RoHS COMPLIANT.
- 6. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.
- 7 WIRE RANGE OF CONTACTS INCLUDED IN KIT: 16 - 20 AWG
- ✓ 8 \CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT	MIN. INSUL.	MAX. INSUL.	TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
16	2.24 mm (.088 in)	3.68 mm (.145 in)	14 - 20 AWG

Λ				
7	4	AT60-202-16141		
	1	AW4P		
	1	AT04-4P		
	QUANTITY	PART N	IUMBER	
			M	
	UNLESS OTHER	SIGNAT		
	<ol> <li>All dimensions a</li> <li>Tolerances are a</li> <li>PL DEC ±0.30</li> </ol>	drawn: D.F		
	2 PL DEC ±0.15 3 PL DEC ±0.08	Fractions ±1/64 Angles ±1°	CHECKED:	
	3) Note reference	= <u>x</u>	ENGINEER:	
	MATERIAL SPECIFICATIONS:		APPROVAL:	
		CUSTOMER:		
	PROCESS SPECIFICATIONS:		THIS DRAWING IS S INFORMATION ONL SPECIFICATIONS A SHOWN HEREON A THE AMPHENOL CC OF REPRODUCTIOI DIMENSIONS ARE S MANUFACTURING	

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: AT04-4P-KIT01