


REFERENCE DIMENSIONS - ASSEMBLED RECEPTACLE

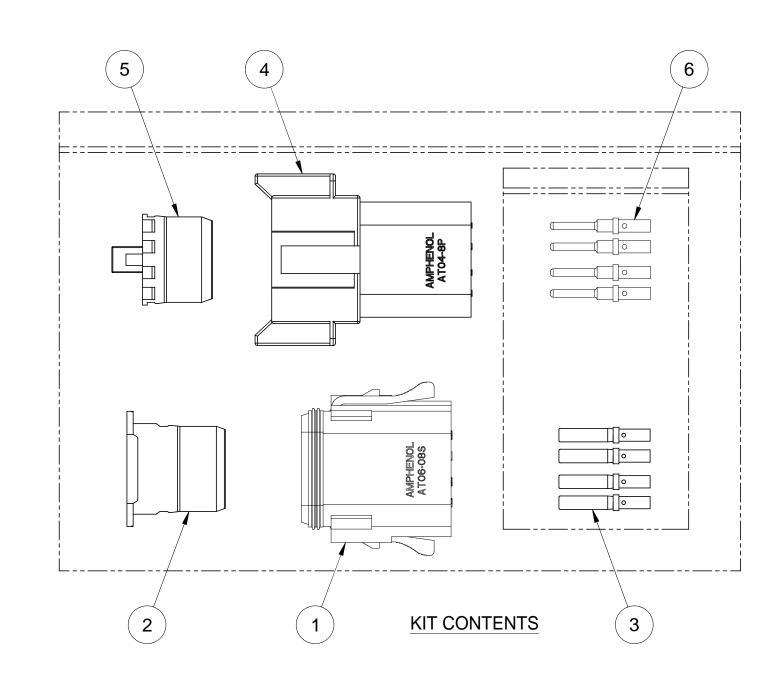

36.8

19.7

REFERENCE DIMENSIONS - ASSEMBLED PLUG

32.5-

KEYED (2) PLACES

AMPHENOL

AND HENOT


ASSEMBLED PLUG AND RECEPTACLE

NOTES: UNLESS OTHERWISE SPECIFIED

- 1. MATERIAL:
- HOUSING: THERMOPLASTIC; COLOR: GREY WEDGELOCK: THERMOPLASTIC; COLOR: GREEN SEALS: SILICONE RUBBER CONTACTS: COPPER ALLOY; NICKEL PLATED
- 2. SPECIFICATIONS:
 - 2.1 CURRENT RATING: 13 AMPS
 - 2.2 OPERATING TEMPERATURE: -55°C TO +125°C
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - 2.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C. 2.5 CONTACT MILLIVOLT DROP: 60 MILLIVOLT DROP
 - 2.5 CONTACT MILLIVOLT DROP: 60 MILLIVOLT DROP@ 13 AMP TEST CURRENT.
 - 2.6 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
 2.7 CONNECTOR MATING CYCLE DURABILITY: 100 CYCLES

- 3. AVAILABLE HAND CRIMPER: CA-5D12
- 4. ALL COMPONENTS ARE RoHS COMPLIANT.
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.
- 6 WIRE RANGE OF CONTACTS INCLUDED IN KIT: 16 20 AWG
- 7 CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT	MIN. INSUL.	MAX. INSUL.	TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
16	2.24 mm (.088 in)	3.68 mm (.145 in)	

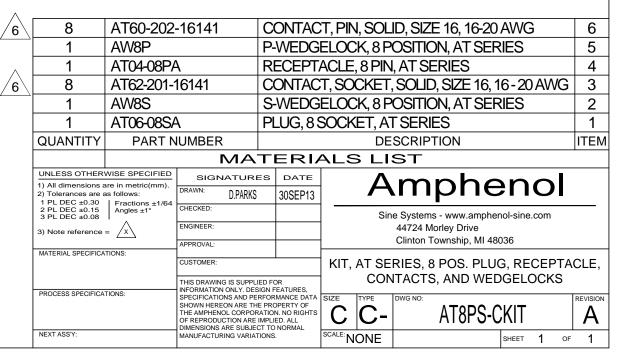

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol: AT8PS-CKIT