


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8A0115	2008/09/15	Shin	Add Notes
C	LEN1640080	2016/03/30	Vicky	Update Logo
D	CI90268	2019/02/19	Ruru	Modify Note

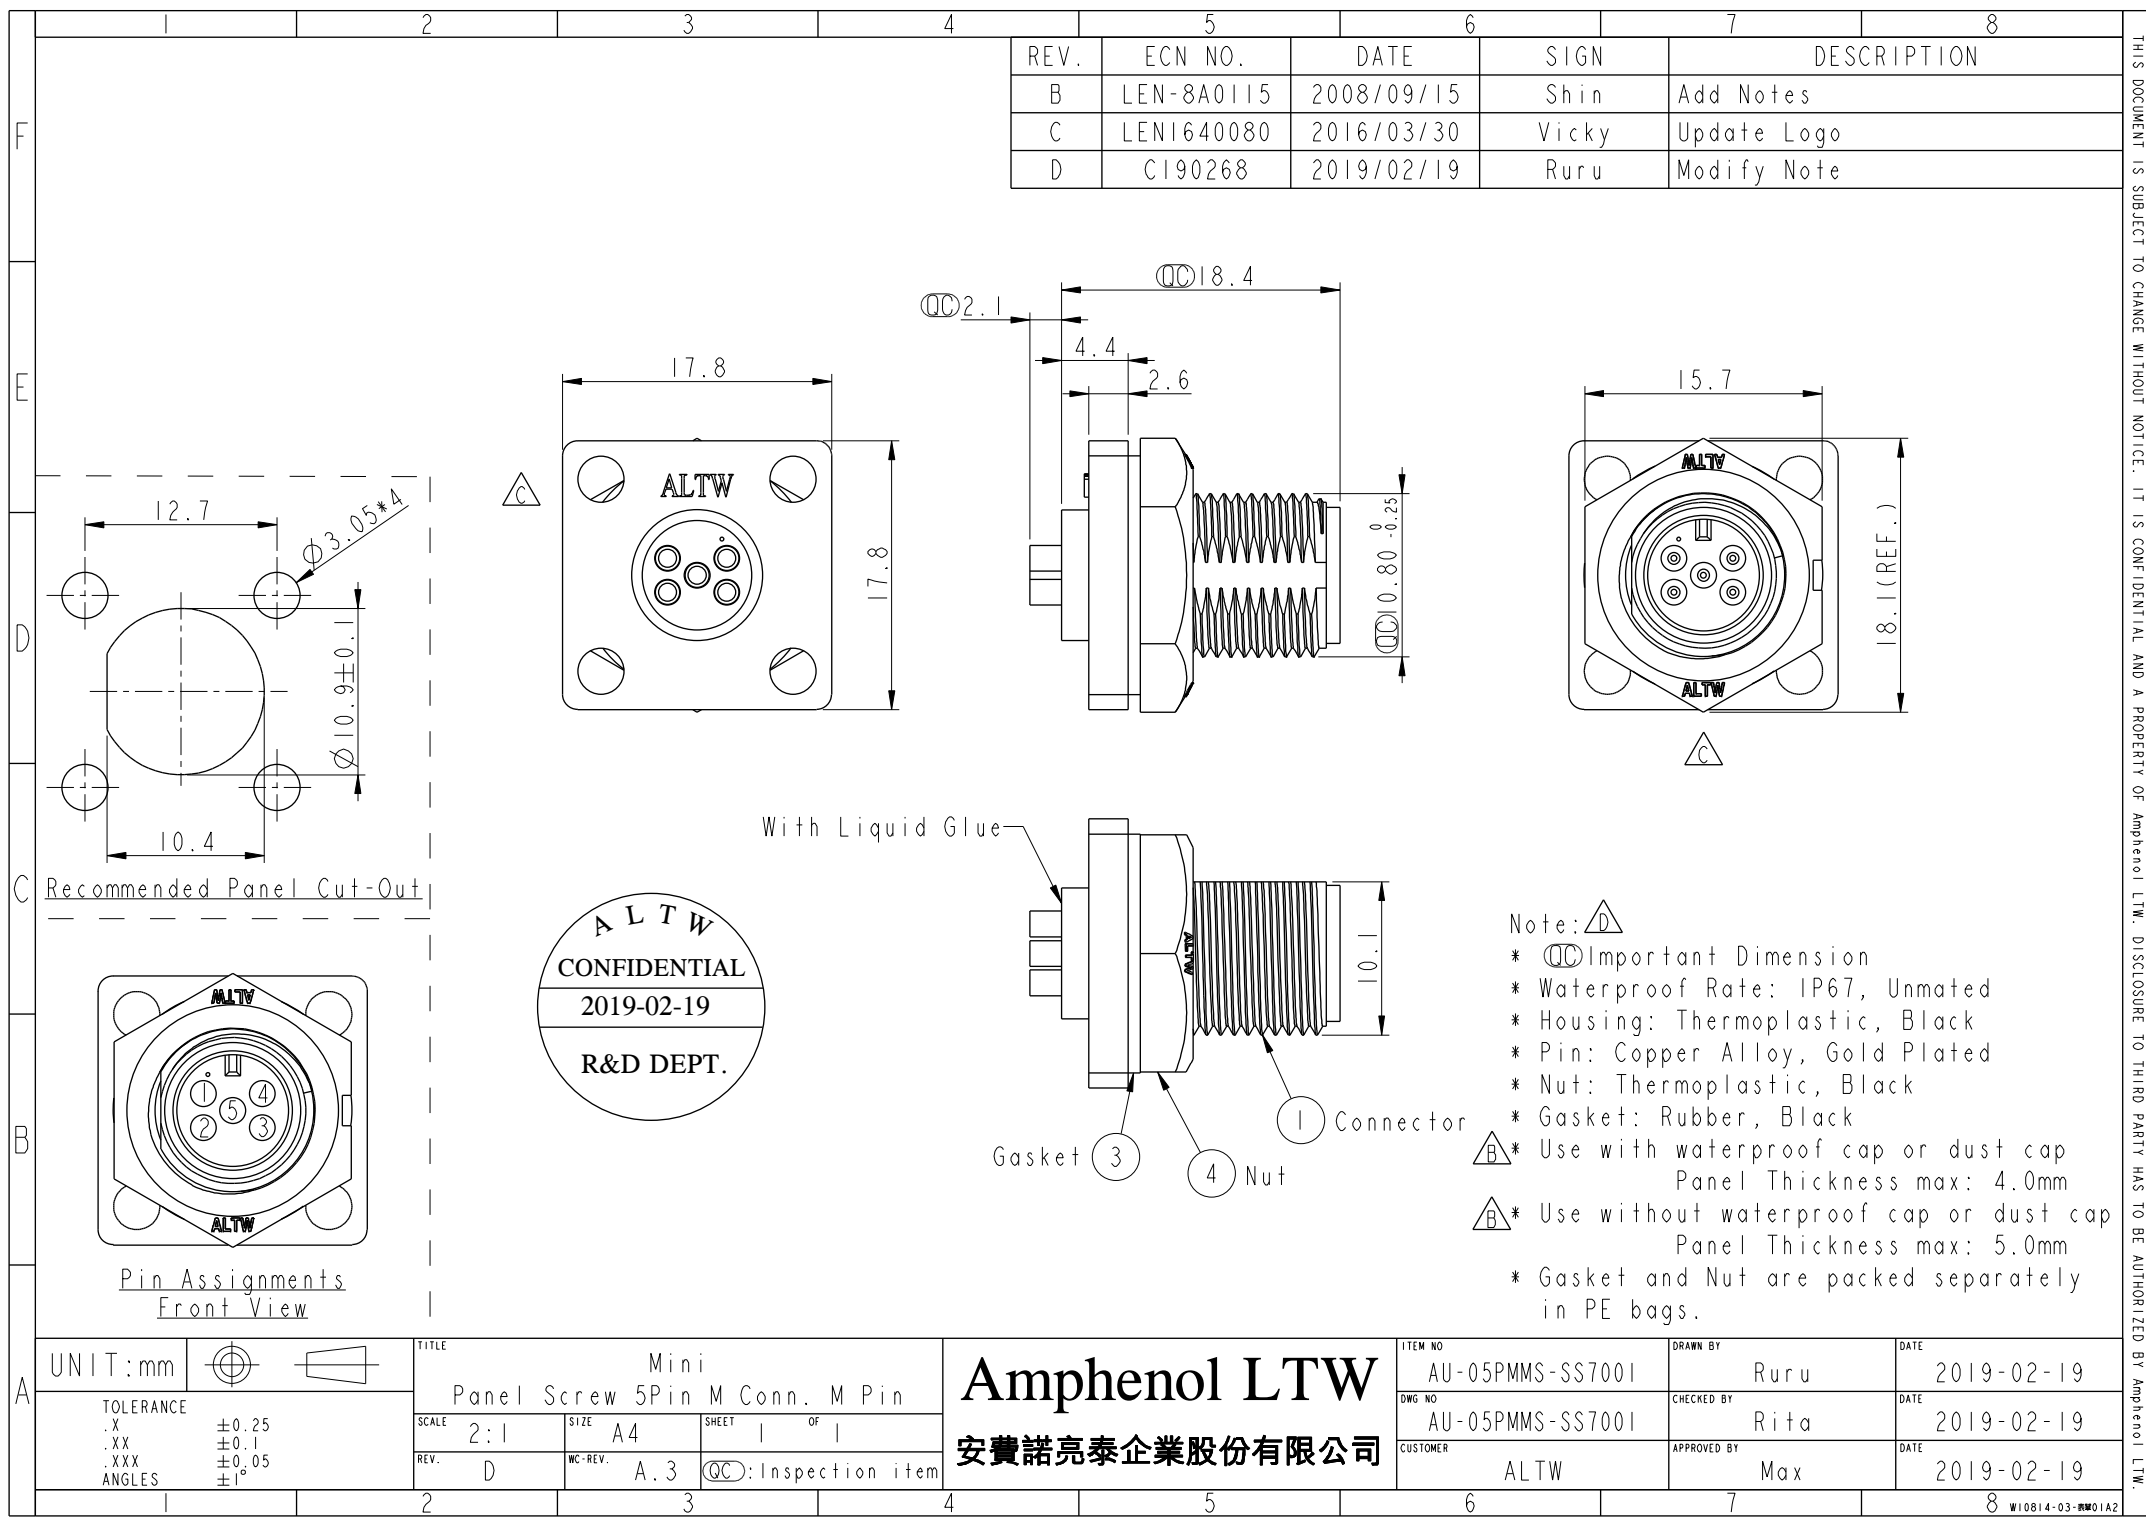

Note:  Important Dimension

- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

 * Use with waterproof cap or dust cap
Panel Thickness max: 4.0mm

 * Use without waterproof cap or dust cap
Panel Thickness max: 5.0mm

* Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE		Amphenol LTW		ITEM NO	DRAWN BY	DATE
		Mini Panel Screw 5Pin M Conn. M Pin		安費諾亮泰企業股份有限公司		AU-05PMMS-SS7001	Ruru	2019-02-19
TOLERANCE		SCALE	SIZE	SHEET	OF	DWG NO	CHECKED BY	DATE
.X ±0.25		2:1	A4	1	1	AU-05PMMS-SS7001	Rita	2019-02-19
.XX ±0.1		REV.	WC-REV.	QC: Inspection item		CUSTOMER	APPROVED BY	DATE
.XXX ±0.05		D	A.3			ALTW	Max	2019-02-19
ANGLES ±1°								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[AU-05PMMS-SS7001](#)