
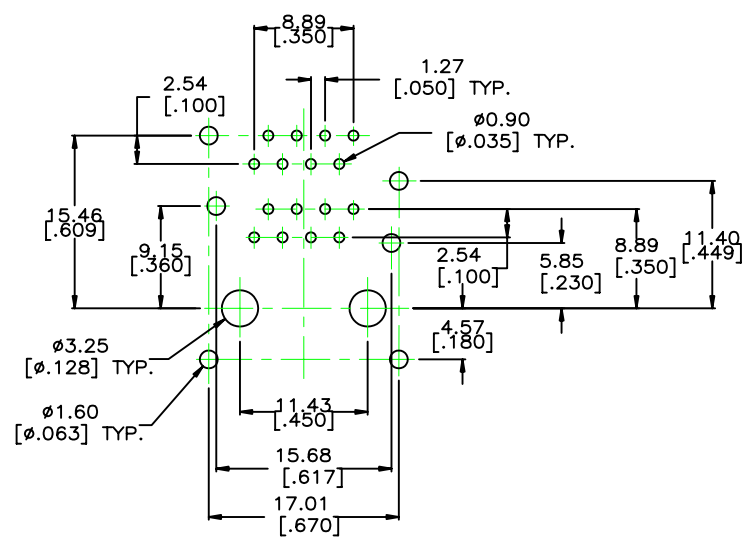
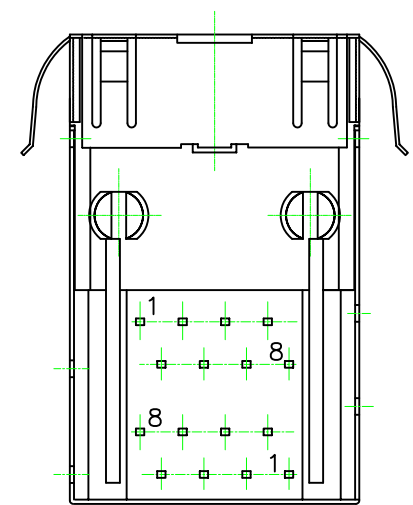
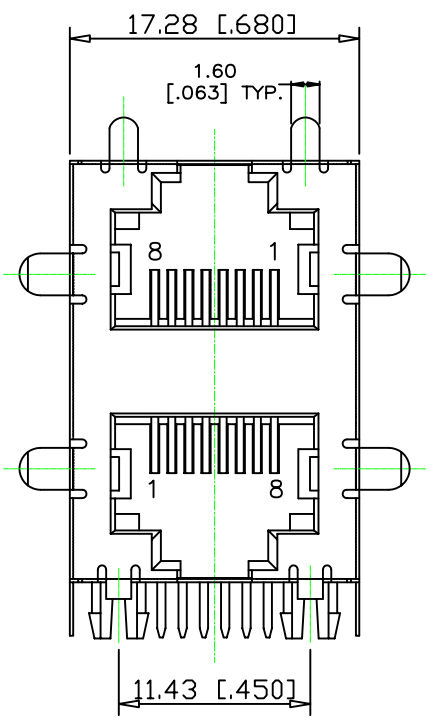
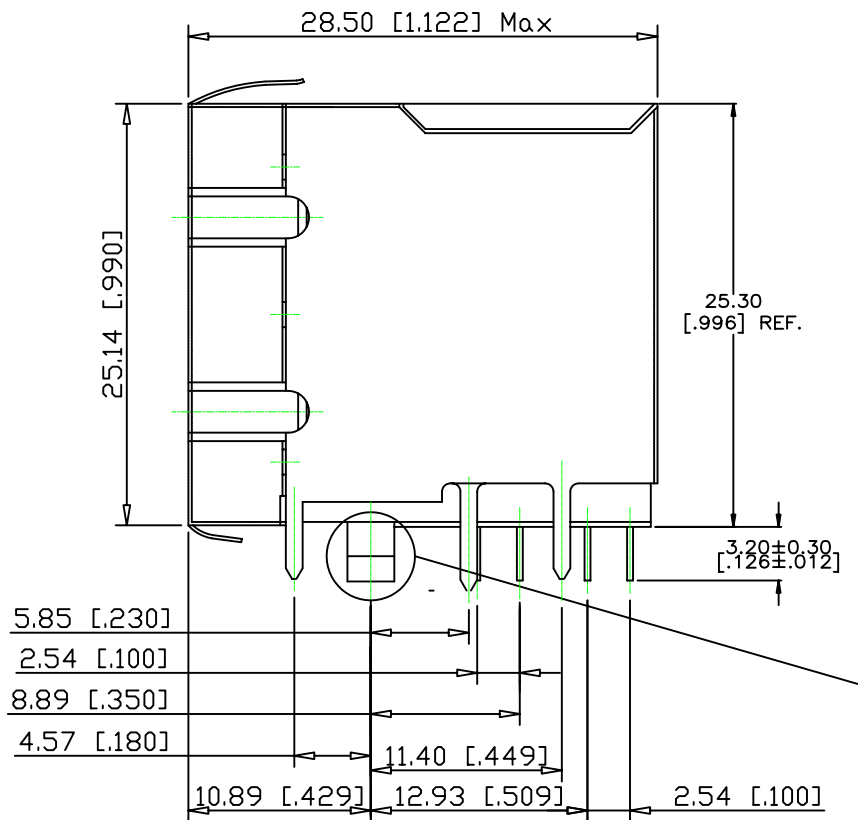


REVISIONS				
SYM	ZONE	ECN, ERN NO.	DATE	APPRD.
A		PROPOSAL	05/10/17	L.CHAN


MATERIALS:  
HOUSING: HIGH TEMPERATURE THERMOPLASTIC, UL 94V-0 BLACK  
CONTACTS: 0.35mm THICKNESS PHOS-BRONZE,  
GOLD PLATING OVER NICKEL IN CONTACT AREA,  
TIN PLATING OVER NICKEL IN SOLDER AREA  
SHIELDED: 0.20mm THICKNESS STAINLESS CASE  
TIN PLATED ON GROUND PIN

ELECTRICAL:  
CONTACT RESISTANCE: 30mΩ Max.  
INSULATION RESISTANCE: 500 MEGOHMS MIN.  
CURRENT RATING: 1.5 AMPS AT 70°C AMBIENT  
VOLATGE RATING: 125VAC  
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V RMS MIN., 60 Hz


CHARACTERISTICE:  
TEMPERATURE RATING: 0°C to +70°C  
STORAGE TEMPERATURE: -40°C TO +80°C  
MATING CYCLES: 1000 MATING/UNMATING CYCLES

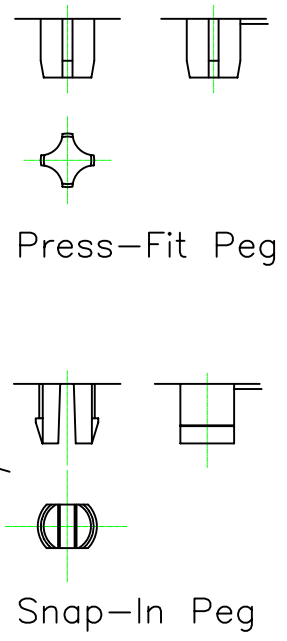

RECOMMENDED P.C.B LAYOUT  
(COMPONENT SIDE OF BOARD)

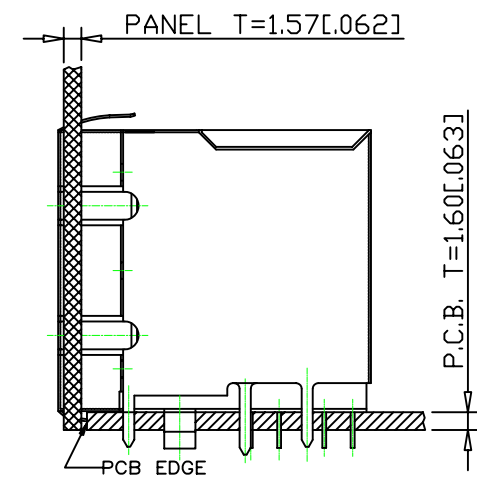

RECOMMENDED PANEL LAYOUT

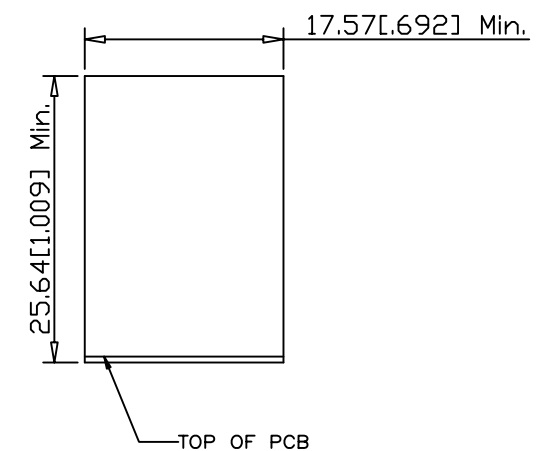

AMPHENOL PARTNUMBER: RJE30-288-1X1X

- |                     |                    |
|---------------------|--------------------|
| <u>GOLD PLATING</u> | <u>PEG OPTIONS</u> |
| 1 = 6 μ INCH        | 1 = PRESS-FIT      |
| 2 = 15 μ INCH       | 2 = SNAP-IN        |
| 3 = 30 μ INCH       |                    |
| 4 = 50 μ INCH       |                    |

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

DRAWN PAUL WANG	DATE 05/10/17	Amphenol Canada Corp.		
DESIGNED				
CHECKED CHIGOW	05/10/17	TITLE STACKABLE MULT-PORT 2PORT,SHIELDED,8 POSITIONS,8 CONTACTS -RoHS COMPLIANT		
I. E. APPRD.				
Q. A. APPRD.				
DWG. APPRD.				
ENG. REL. NO.		DWG	DRAWING NO.	REV.
REF.			P-RJE30-288-1X1X	A
DIMENSIONS ARE IN MM [inchs]	CODE ID. NO. 03554	SCALE	WT. -----	SURF. -----
				SHEET 1 OF 1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[RJE302881110](#)