


F	1	2	3	4

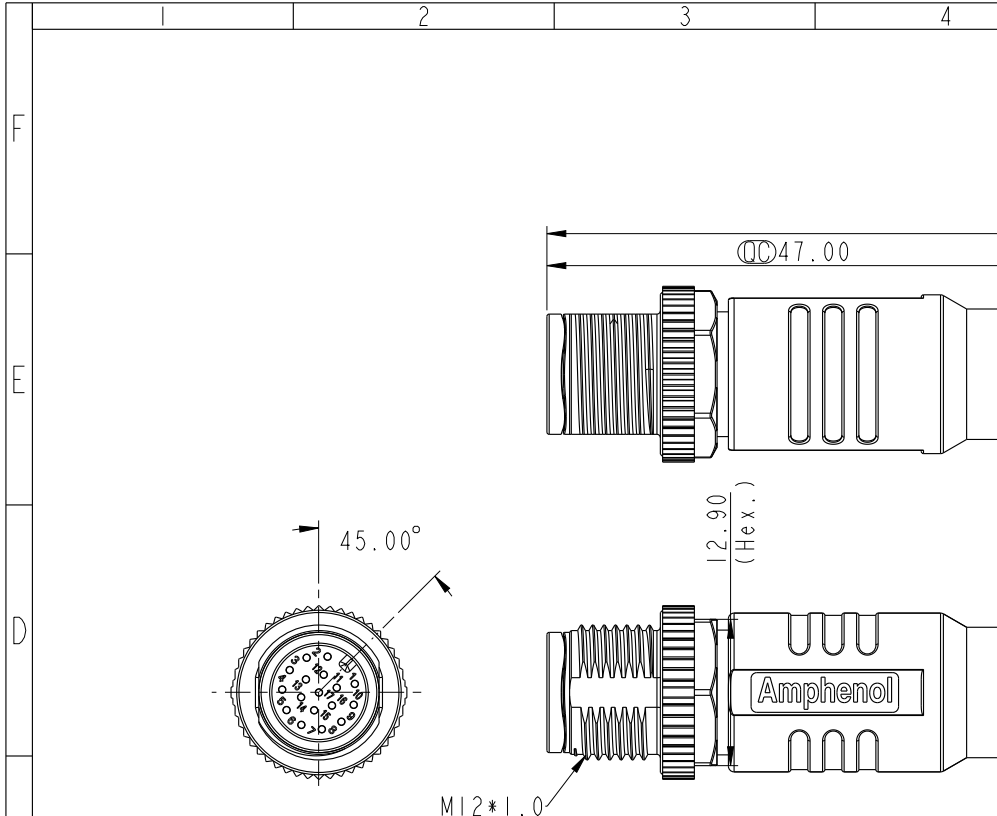

* Cable Length Tolerance: 01M:±40mm
02~05M:±60mm
06~10M:±100mm
11~30M:±200mm
31~30M:±500mm

A	UNIT: mm		TITLE M12 Shielded A Code Cable Male Conn.		
	TOLERANCE ±0.5mm		SCALE 3:2	SIZE A4	SHEET 1 OF 3
			REV. E	WC-REV. A.1	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Cynthia	DATE 2019/05/13
DWG NO MSAS-XXBMMM-SL8XXX	CHECKED BY Wen	DATE 2019/05/13
CUSTOMER ALTW	APPROVED BY Neo	DATE 2019/05/13

[illegible]

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

		2		3		4		5		6		7		8	
F															
E															
D															
C															
B															
A															
Pin Out															
Pin Assignments Front View															
UNIT:mm															
TOLERANCE															
±0.5mm															
TITLE															
M12 Shielded A Code															
Cable Male Conn.															
SCALE															
3:2															
SIZE															
A4															
SHEET															
3 OF 3															
REV.															
E															
WC-REV.															
A.1															
QC:Inspection item															
Amphenol LTW															
安費諾亮泰企業股份有限公司															
ITEM NO															
MSAS-XXBMMM-SL8XXX															
CUSTOMER															
ALTW															
DRAWN BY															
Cynthia															
CHECKED BY															
Wen															
APPROVED BY															
Neo															
DATE															
2019/05/13															
DATE															
2019/05/13															
DATE															
2019/05/13															
WI0814-03-0001A2															

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[MSAS-17BMMM-SL8B01](#) [MSAS-17BMMM-SL8B02](#) [MSAS-17BMMM-SL8D01](#) [MSAS-17BMMM-SL8D02](#)