

D'Sub connectors - Stamped and Formed Contacts

RIGHT ANGLE BOARD MOUNT CONNECTORS



CRIPTION

The Amphenol "SD" series features precision formed contacts and boardlocks.

This series gives you Amphenol's high standards of quality and reliability to meet all of your commercial requirements.

Economical
right angle PCB
mount
connectors

Specifications

• Connectors according to: MIL C24308 - NFC 93425-HE5

	Materials and Platings
Shells	Steel, tin over nickel plating
Insulator	Glass-filled thermoplastic, UL 94V- 0
Pin contacts	Brass, selected gold in mating area;
	2.54μm (100 μ") min.tin on
	termination area over 1.27µm
	(50μ") min.nickel
Socket contact	Phosphor bronze, selected gold in
	mating area;2.54µ(100µ") min.tin
	on termination area over 1.27µm
	(50μ") min.nickel
Rear insert	Brass, 2.54µm (100µ") min.nickel plated
Boardlock	Phosphor bronze or Brass, 2.54µm
	(100µ") min.nickel plated
Screwlock	Brass, 2.54μm (100μ") min.nickel plated

	Electrical Data
Current rating	5A
Voltage rating	250V AC/ rms 50Hz
Withstanding voltage	1000V AC/rms 50Hz for one minute
Insulation resistance	1000MΩ at 500V DC
Contact resistance	15mΩ max

	Climatic Data
Operating temperature Salt spray	-55°C to +125°C 24 hours

Mechanical Data

Single contact insertion force 0.54kg (1.19lb) max Single contact withdrawal force 0.06kg (0.13lb) min

Mating and unmating force

Unit: kg (lb)

	A4 S	Style	1A Style		
No. of Cts	Mate (max)	Unmate (min)	Mate (max)	Unmate (min)	
9	3.05 (6.74)	0.36 (0.79)	4.6 (10.17)	0.4 (0.88)	
15	5.09 (11.24)	0.46 (1.01)	7.7 (17.02)	0.5 (1.10)	
25	8.44 (18.66)	0.81 (1.8)	12.7 (28.07)	0.8 (1.77)	
37	12.51 (27.65)	1.1 (2.47)	17.7 (39.12)	1.2 (2.65)	

Standard plating thickness • gold flash

0.381μm (15μ") gold0.76 μm (30μ") gold

Industrial


• Telecom

Any industry standard
 I / O connections






A4 style (MIL Footprint)

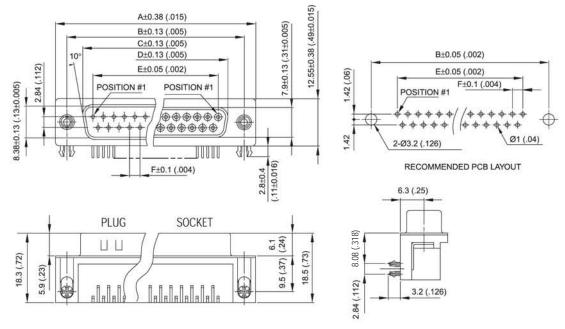


Nb OF	DIMENSIONS mm (inch)					
CONTACTS	А	В	С	D	E	F
9	30.84 (1.21)	24.99 (.98)	16.92 (.67)	16.24 (.64)	11.09 (.44)	2.74 (.108)
15	39.14 (1.54)	33.32 (1.31)	25.25 (.99)	24.56 (.97)	19.39 (.76)	2.74 (.108)
25	53.04 (2.09)	47.04 (1.85)	38.96 (1.53)	38.38 (1.51)	33.24 (1.31)	2.77 (.109)
37	69.32 (2.73)	63.50 (2.50)	55.42 (2.18)	54.76 (2.16)	49.86 (1.96)	2.77 (.109)

1A style (European Footprint)

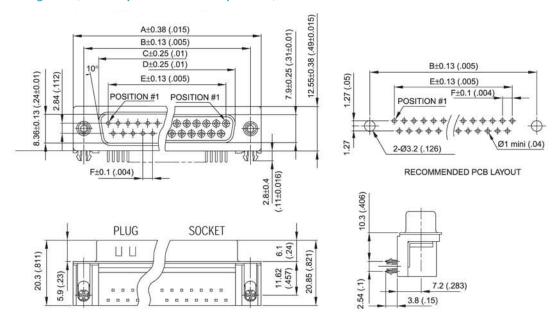


Nb OF	DIMENSIONS mm (inch)					
CONTACTS	А	В	С	D	E	F
9	30.84 (1.21)	24.99 (.98)	16.92 (.67)	16.24 (.64)	11.96 (.43)	2.74 (.108)
15	39.1 (1.54)	33.32 (1.31)	25.25 (.99)	24.66 (.97)	19.18 (.755)	2.74 (.108)
25	53.09 (2.09)	47.04 (1.85)	38.96 (1.53)	38.38 (1.51)	33.24 (1.31)	2.77 (.109)
37	69.4 (2.73)	63.50 (2.50)	55.42 (2.18)	54.84 (2.16)	49.86 (1.96)	2.77 (.109)

Panel mounting option

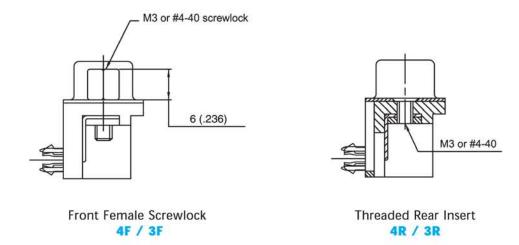

How to order

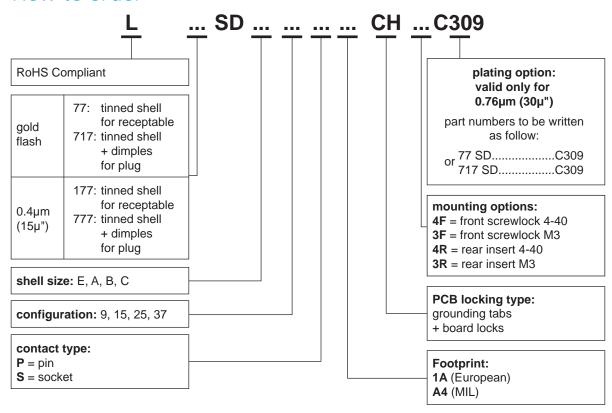

For special request, please consult factory

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

L777SDE09PA4CH4R L777SDA15P1ACH4F L777SDA15P1ACH3F L777SDB25P1ACH3R L777SDB25P1ACH3F L777SDE09PA4CH4F L777SDA15PA4CH4R L777SDC37PA4CH4R L777SDE09P1ACH4R L777SDC37P1ACH3F L777SDE09P1ACH3F L777SDE09P1ACH3F L777SDE09P1ACH3F L777SDE09P1ACH3F L777SDE09P1ACH3F L777SDE09P1ACH3F L777SDE09P1ACH3F L777SDE09P1ACH3F L777SDE09P1ACH3F L777SDE09P1ACH4F L777SDA15PA4CH4F L777SDA15PA4CH4F L777SDE09PA4CH4F L777SDE09PA4CH4F L777SDA15PA4CH4F L777SDA15PA4CH4F L777SDB25P1ACH3F L777SDE09PA4CH3F L777SDE09PA4CH3F L777SDB25PA4CH3F L777SDB25PA4CH3F L777SDB25PA4CH3F L777SDC37PA4CH3F L777SDC37PA4CH3F L777SDB25PA4CH3F L777SDB25SA4CH4F L77SDB25SABCOC309 L77SDB25S1ACO3F L77SDB25S1ACO3FC309 L77SDB25SA4COC309 L77SDB25SABCOC309 L77SDB25SAACOC309 L77SDB25SABCOC309 L77SDB25SAACOC309 L77SDB25SAACOC309 L77SDB25SABCOC30F L77SDB25SAACOC30P L77SDE09SAACOC4FC30P L77SDE09SAACOC4FC30P L77SDE09SAACOC4FC30P L77SDB25SAACOC30P L77SDE09SAACOC4FC30P L77SDE09SAACOC4FC30P L77SDB25SAACOC30P L77SDB25SAACOC3FC30P L77SDB25SAACOC3FC30P L77SDB25SAACOC4FC30P L77SDB