


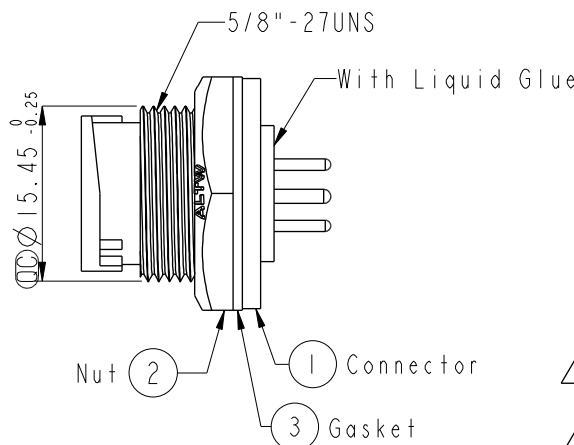

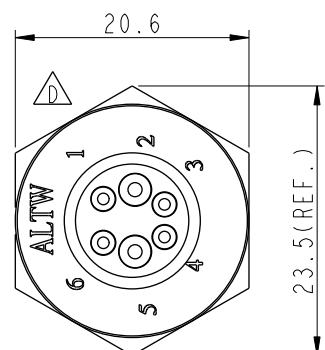


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LE3-8C0056	2008/11/07	Ivan	Change to pin hole
D	LEN1730291	2017/03/20	Ruru	Change Logo
E	CI90274	2019/02/20	Ruru	Modify Note

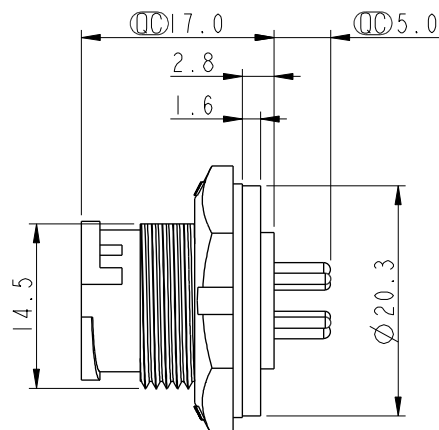


PCB Lay-Out



- Note:
- * Important Dimensions To Check.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
- * Use with Waterproof Cap or Dustcap
Panel Thickness Max: 3.0mm
- * Use without Waterproof Cap or Dustcap
Panel Thickness Max: 4.5mm
- * Gasket and Nut are packed separately in PE bags.



Pin Assignments
Front View



Recommended Panel Cut-Out

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		Standard		BBD-06PMFP-LC7001		Ruru		2019-02-20	
.XXX ±0.05		ANGLES ±1°		Panel Lock 6Pin M Conn. F Pin		DWG NO		CHECKED BY		DATE	
				SCALE		BBD-06PMFP-LC7001		Rita		2019-02-20	
				REV.		CUSTOMER		APPROVED BY		DATE	
				E		ALTW		Max		2019-02-20	
				WC-REV.							
				A.2							
				QC: Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[BBD-06PMFP-LC7001](#)