





1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1620076~79	2016/01/08	Ruru	Change Logo

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

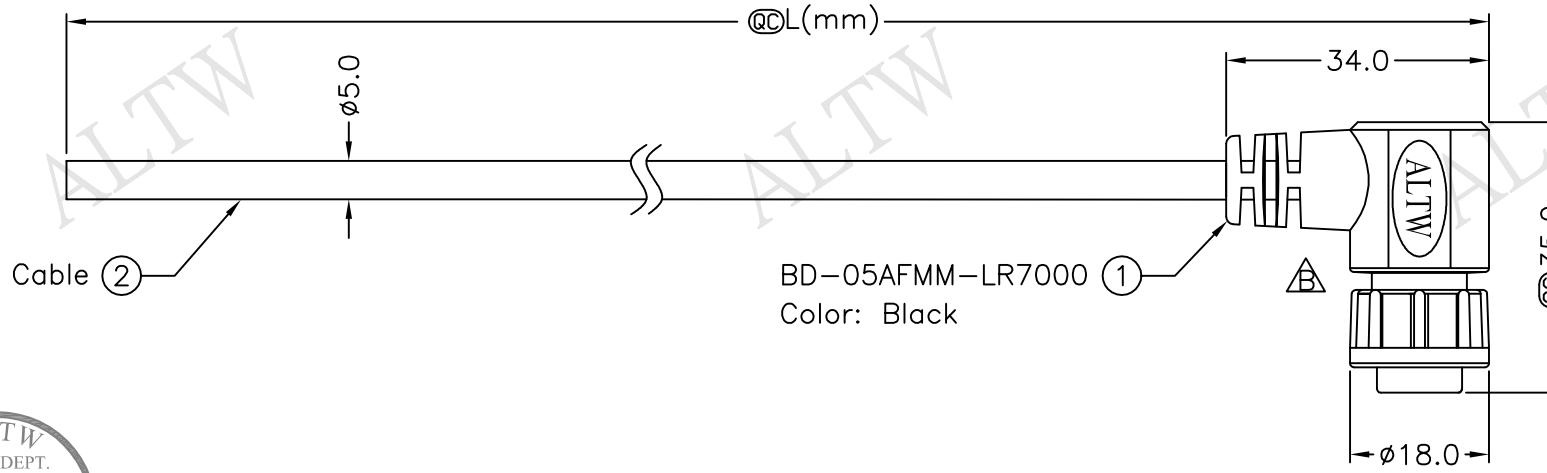

Pin Assignments
Front View

5	Green
4	White
3	Black
2	Blue
1	Brown
Conn.	Wire Color
	Pin Out

BD-05AFMM-LR7AXX
XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters
Cable Length(L):01~99Meters



Conn.

Note:

- * ØCL Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated
- * Cable: Black, UL2464 24AWG*5C+D +Al/My, (UV Resistant) OD=5.0
- * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm



UNIT:mm		TITLE: Standard, Cable Lock 5Pin F Conn M Pin		
TOLERANCE	±0.5 mm	SCALE	Free	SHEET 1 OF 1
		REV.	B	SIZE A4
				QC :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
BD-05AFMM-LR7AXX	Ruru	2016/01/07
CUSTOMER	CHECKED BY	DATE
ALTW	Rita	2016/01/07
APPROVED BY		
Lisa		2016/01/07

1 2 3 4 5 6 7 8 FMWI0702-01-01A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[BD-05AFMM-LR7A01](#) [BD-05AFMM-LR7A05](#) [BD-05AFMM-LR7A02](#) [BD-05AFMM-LR7A10](#)