


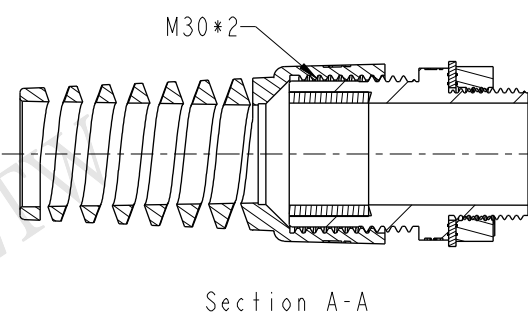

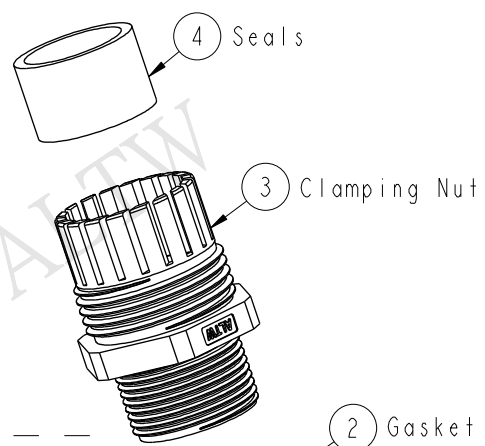
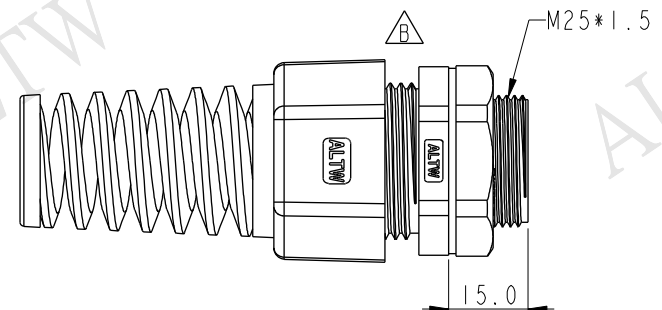
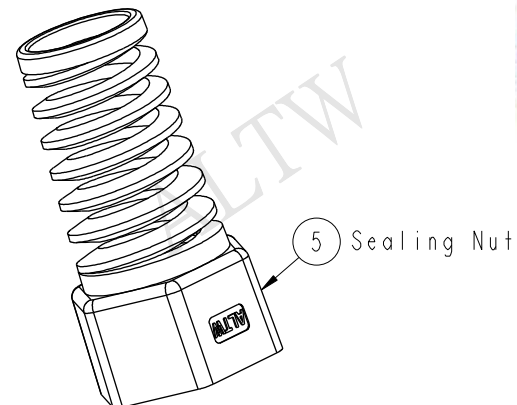




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1570055	2015/06/01	Ruru	Change Logo

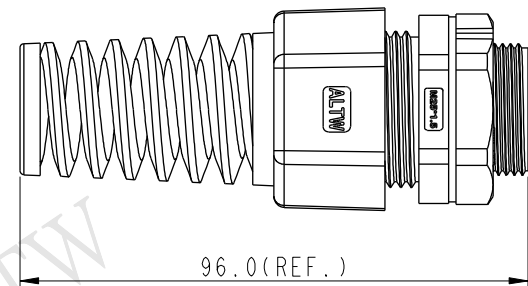

- Note:
- * Waterproof Rate: IP68
 - * Screw Nut: Nylon, Gray
 - * Clamp Ring: Nylon, Gray
 - * Sealing Nut: Nylon, Gray
 - * Gasket: EPDM, Black
 - * Seals: EPDM, Black
 - * Panel Thickness: 6.2mm max.
 - * Cable Range: $\varnothing 18\text{mm} \sim \varnothing 13\text{mm}$
 - * Spanner Size:
- ① Screw Nut: 33mm
 - ③ Body: 32.5mm
 - ⑤ Sealing Nut: 34mm



UNIT: mm		TITLE		ITEM NO.		DRAWN BY		DATE	
TOLERANCE		M25 Straight with SR		CSG-25M006		Ruru		2015-06-01	
.X ±0.25		SCALE	3:5	SIZE	A4	DWG NO.	CSG-25M006	CHECKED BY	Rita
.XX ±0.1		REV.	B	WC-REV.	A.1	CUSTOMER	ALTW	APPROVED BY	Lion
.XXX ±0.05		SHEET 1 OF 1		DATE		DATE		DATE	
ANGLES ±1°		QC: Inspection item						2015-06-01	
								2015-06-01	

Amphenol LTW
安費諾亮泰企業股份有限公司

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[CSG-25M006](#)