
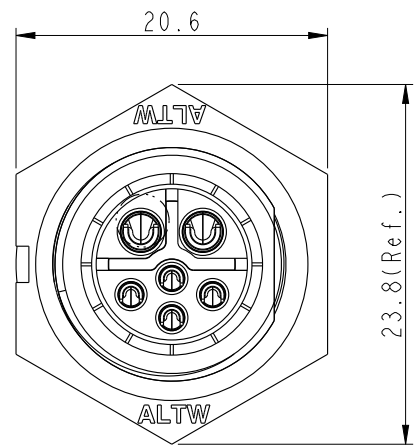
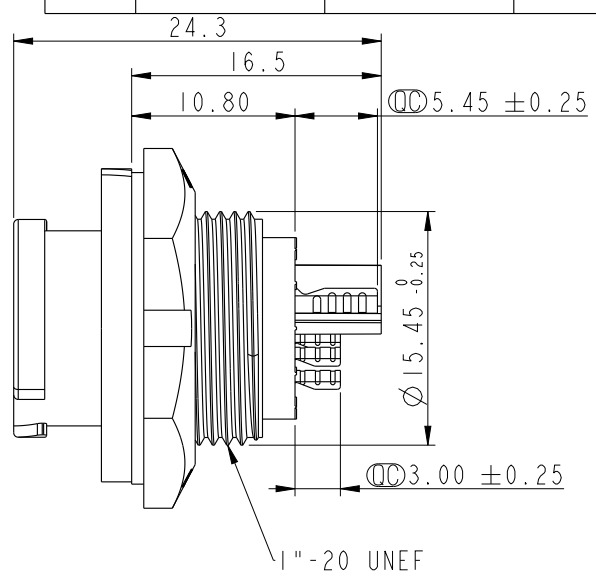


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2016-05-07	Spring	Change Rev.01 To Rev.A

ALTW
CONFIDENTIAL
2016-05-07
R&D DEPT.

ALTW
DCC. DEPT.
CONFIDENTIAL
2016.05.18
ISSUED

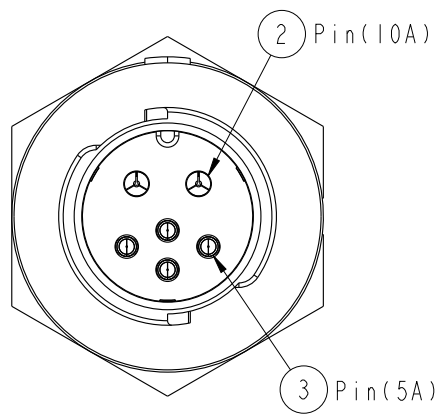

White Printing

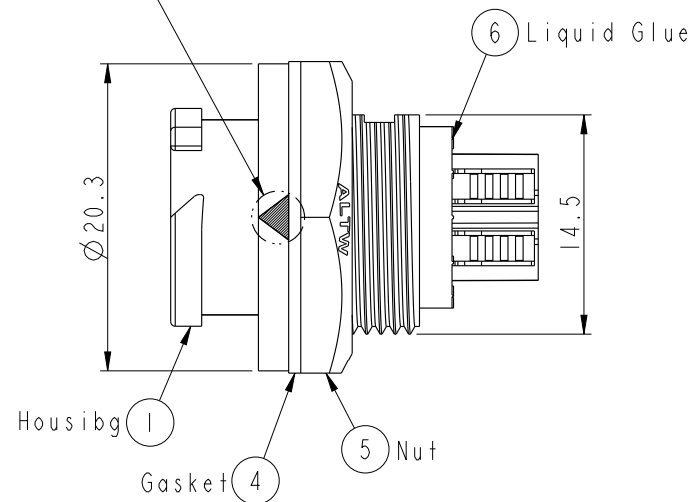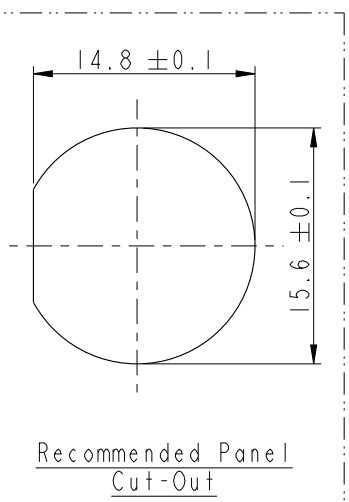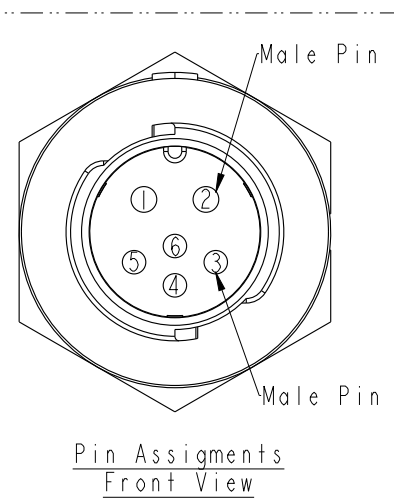

- Note:
- * Important Dimension To Check.
 - * Waterproof Rate: IP68(Unmated)
In 1 meter water within 24 hours
 - * Working Voltage Rating:
Power: AC/DC 300V
Data: DC 30V
 - * Working Current:
Power: 10A
Data: 05A
 - * Housing: Nylon+GF, Black.
 - * Pin: Copper Alloy, Gold Plated.
 - * Nut: Nylon+GF, Black.
 - * Gasket: Silicone, Gray.
 - * Use without waterproof cap
Panel Thickness Max: 3.6mm

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		STANDARD, RECEPTACLE (REAR)		BBD-06RMMS-QC8001		Spring		2016-05-07	
.XXX ±0.05		ANGLES ±1°		X-LOK (2+4)PIN M CONN M PIN		DWG NO		Fisher		2016-05-07	
SCALE 2:1		SIZE A4		SHEET 1 OF 1		CUSTOMER		Kevin		2016-05-07	
REV. A		WC-REV. A.5		QC: Inspection item		ALTW					

Amphenol LTW
安費諾亮泰企業股份有限公司

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[BBD-06RMMS-QC8001](#)