


1	2	3	4	5	6	7	8
A	B	C	D	REV. D ECN NO. LEN-930190~4 DATE 2008/10/28 SIGN Li Xiu Zhi DESCRIPTION Change SR	E LEN1340088~92 2013/04/02 Tony_leng Change SR	F LEN1520261~69 2015/02/10 Ruru Change Logo	
F	E	D	C				

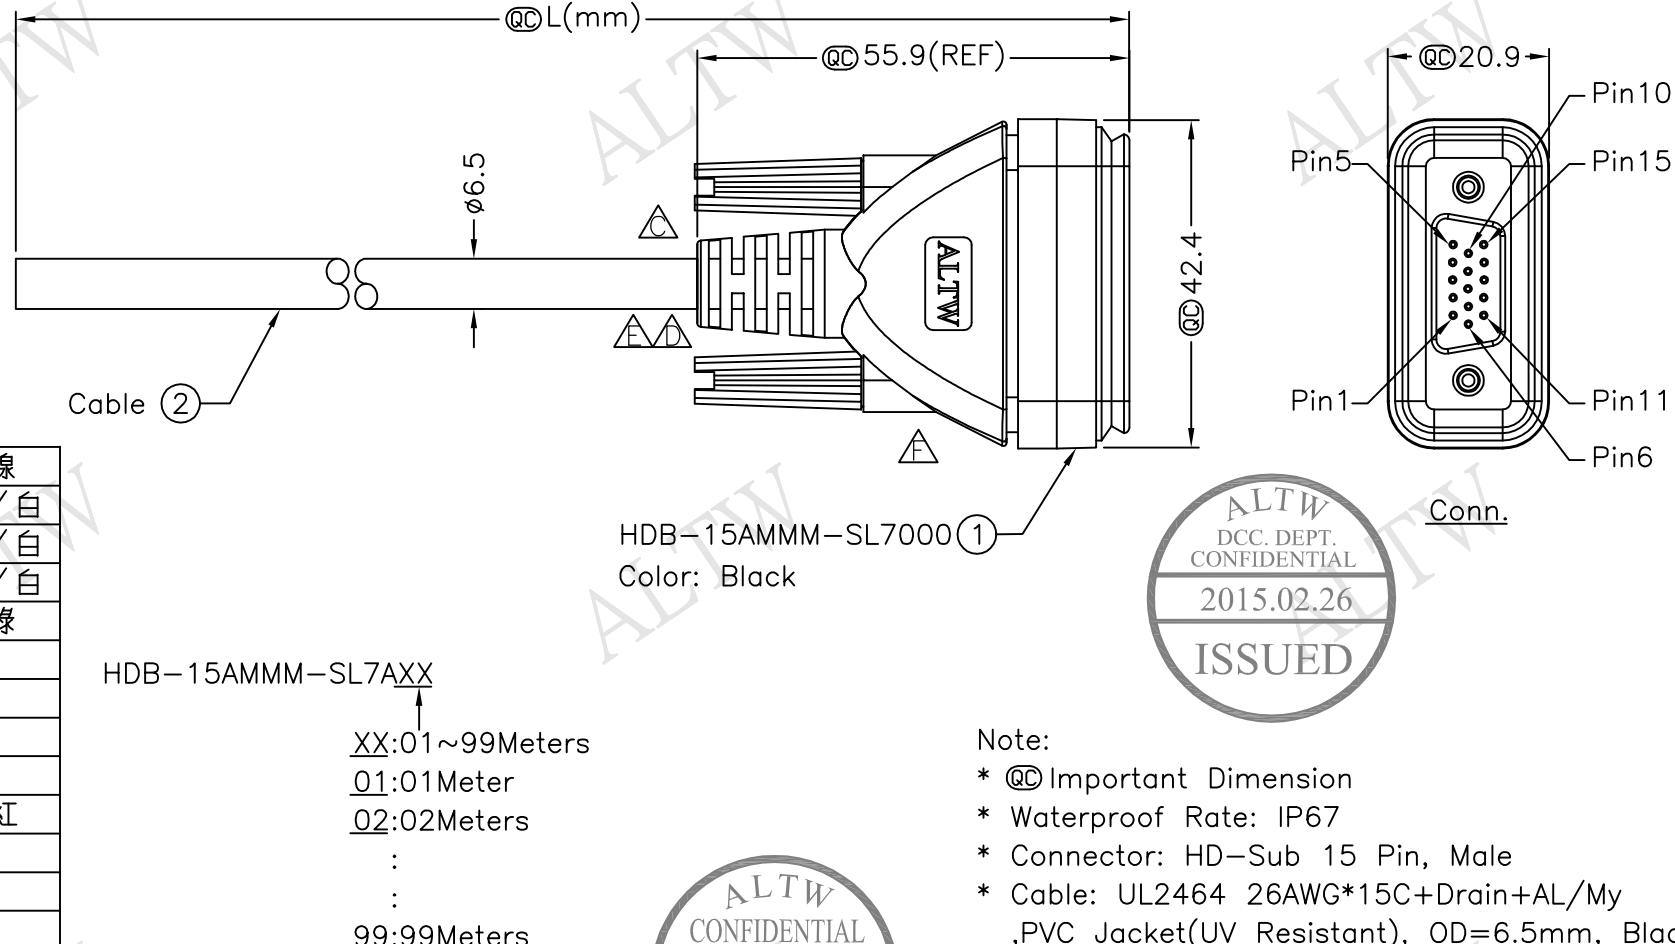

UNIT:mm		TITLE HD-SUB Conn		
TOLERANCE			Cable Screw HD15P M Conn M Pin	
± 0.5 mm		SCALE	Free	SHEET 1 OF 1
REV. F		SIZE A4	@C :Inspection Item	
Amphenol LTW 安費諾亮泰企業股份有限公司				

ITEM NO	DRAWN BY	DATE
DWG NO HDB-15AMMM-SL7AXX	CHECKED BY Rita	DATE 2015/02/10
CUSTOMER ALTW	APPROVED BY Lion	DATE 2015/02/10

- Note:
- * @C Important Dimension
 - * Waterproof Rate: IP67
 - * Connector: HD-Sub 15 Pin, Male
 - * Cable: UL2464 26AWG*15C+Drain+AL/My,PVC Jacket(UV Resistant), OD=6.5mm, Black
 - * Cable Length Tolerance: 01M: ± 40 mm
02M~05M: ± 60 mm
06M~10M: ± 100 mm
11M~30M: ± 200 mm
31M~99M: ± 500 mm

1	2	3	4	5	6	7	8 FMWI0702-01-01A2
---	---	---	---	---	---	---	--------------------

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[HDB-15AMMM-SL7A01](#) [HDB-15AMMM-SL7A02](#) [HDB-15AMMM-SL7A05](#) [HDB-15AMMM-SL7A10](#)