
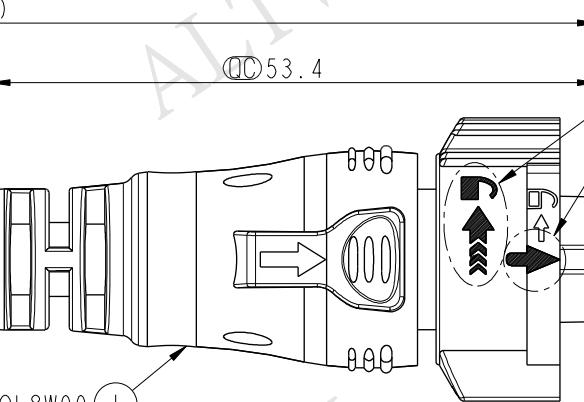





1	2	3	4	5	6	7	8
REV.	ECN NO.	DATE	SIGN	DESCRIPTION			

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



BB-03AFFM-QL8W00

Cable ②

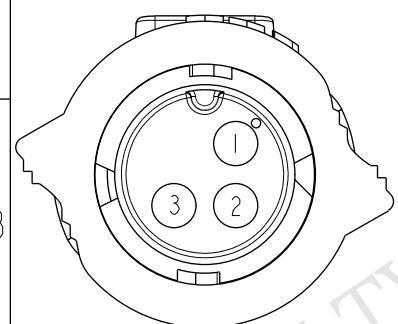

Pin Assignments  
Front View

3	Red	紅
2	Brown	棕
1	Black	黑
Conn.	Wire Color	

Pin Out

BB-03AFFM-QL8D XX

XX : 01~99Meters  
01 : 01Meter  
02 : 02Meters  
:  
99 : 99Meters

#### Note:

- \* ØImportant Dimension To Check.
- \* Waterproof Rate: IP68(Mated)
- \* Working Voltage Rating: AC 300 V
- \* Working Current Rating: 10A
- \* Flame Class: UL94V-0 (UV Resistance)
- \* Housing: Nylon+GF, Black.
- \* Female Pin: Copper Alloy, Gold Plated.
- \* Rubber: Silicon, Gray
- \* Cable: UL21388 16AWG\*3C+AL+My PVC Jacket UV Resistant, OD=6.5, Black.
- \* Cable Length Tolerance: 01M:±40mm  
02M~05M:±60mm  
06M~10M:±100mm  
11M~30M:±200mm  
31M~99M:±500mm

UNIT:mm		TITLE X-Lok B-Size Molding F Conn F 3 Pin			ITEM NO	DRAWN BY	DATE
TOLERANCE	±0.5	SCALE	3:2	SIZE	A4	SHEET	OF
.X		REV.	A	WC-REV.	A.2	QC: Inspection item	
					BB-03AFFM-QL8DX	CHECKED BY	
						Spring	2014-09-12
					CUSTOMER	APPROVED BY	
					ALTW	Kevin	2014-09-12

Amphenol LTW  
安費諾亮泰企業股份有限公司

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[BB-03AFFM-QL8D01](#)