


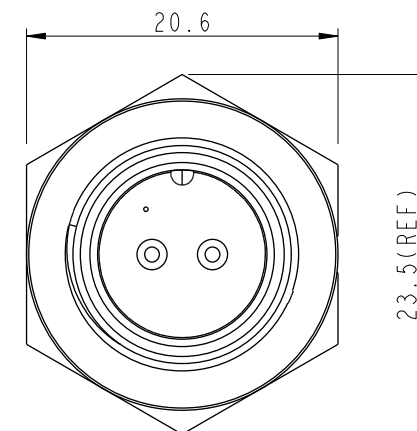
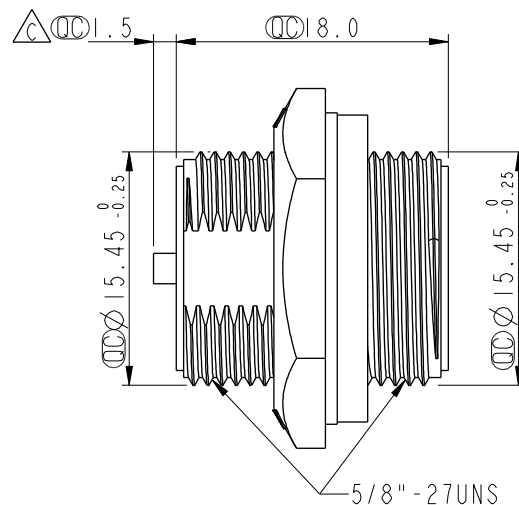
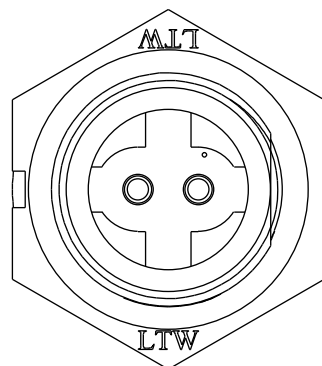



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0557	2008/09/19	Shin	Add Note and Change Format to Standard
C	LEN-940068	2009/03/19	LiuShuYun	Change Size 1.50 to 1.5




Pin Assignments
Front View

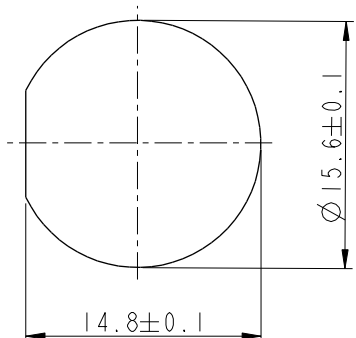

Recommended Panel Cut-out

With Liquid Glue

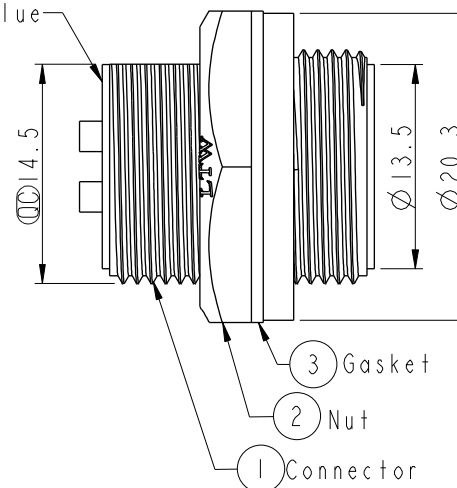

Note:

- * $\varnothing$ Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: Black, Nylon+GF
- * Male Pin: Copper Alloy, Gold Plated
- * Nut: Black, Nylon+GF
- * Gasket: Black, EPDM

- $\triangle B$ * Use With Waterproof Cap Or Dust Cap
Panel Thickness Max: 4.0mm
- $\triangle B$ * Use Without Waterproof Cap Or Dust Cap
Panel Thickness Max: 5.0mm

UNIT:mm				TITLE Standard, Rear Screw 2P M Conn M Pin		ITEM NO BD-02RMMS-SC7001	DRAWN BY SamChang	DATE 2012-03-15
TOLERANCE		SCALE 2:1		SIZE A4		DWG NO BD-02RMMS-SC7001	CHECKED BY Jeffrey	DATE 2012-03-26
.X ±0.25		REV. C		WC-REV. A.2		CUSTOMER ALTW		DATE 2012-03-26
.XX ±0.1								
.XXX ±0.05								
ANGLES ±1°								

Amphenol LTW
安費諾亮泰企業股份有限公司

$\varnothing$ Inspection item

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[BD-02RMMS-SC7001](#)