
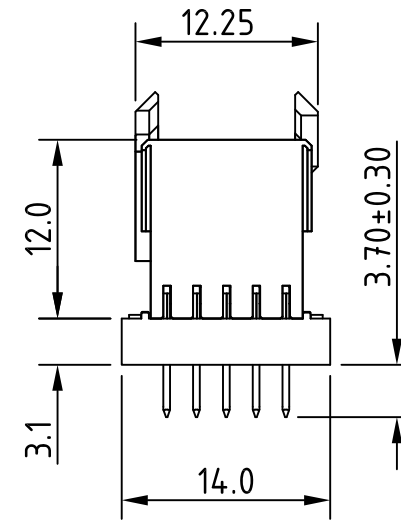


VISUAL
POLARISATION

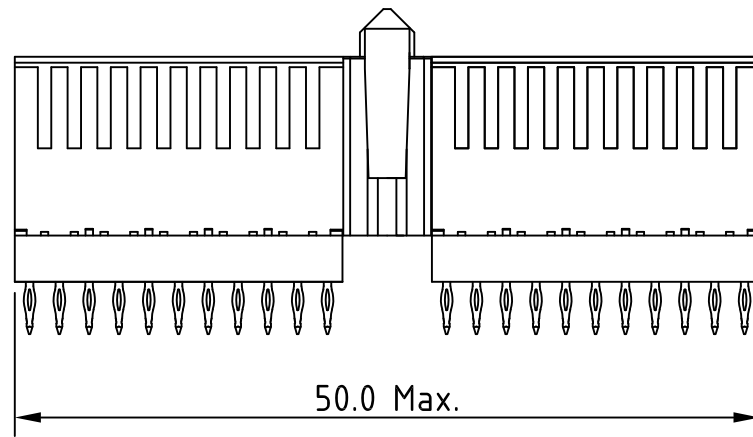

HM2S10PD51M0


LEAD FREE INDICATOR : LF = LEAD FREE
(DIGIT 15 & 16)

PLATING CODE (DIGIT 13 AND 14)
(REFER DWG. NO. BSC,201844,003)




NOTES

1. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004
2. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS, A , 201572 , 001
3. COLUMN 1 OF CONNECTOR SHOULD COINCIDE WITH COLUMN 1 OF PCB

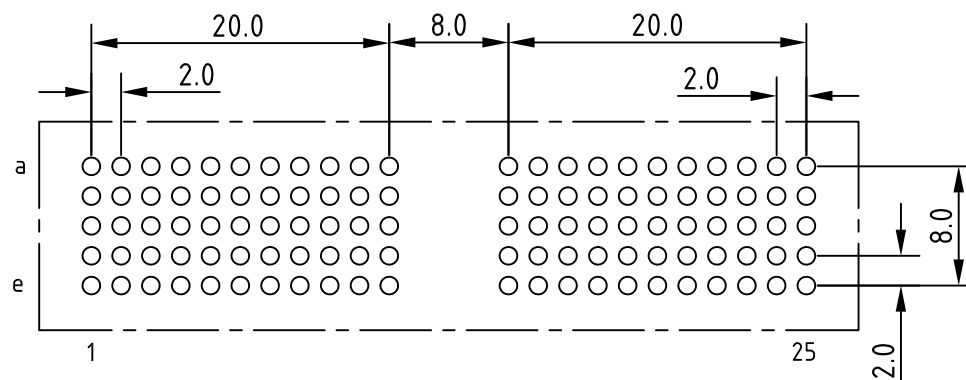LAYOUT PCB HOLE



CATALOG NO: HM2S10PD51M0----

mat'l. code				surface ISO 1302		✓ tolerance ISO 406 ISO 1101		projection 		product family MILLIPACS										
ltr	ecn no	dr	date	tolerances unless otherwise specified						title										
A	-	MINI	2018-09-14	angles linear		.0±0.2				MPACS 5+2R STR REC PF CONN TYPE A (Low Thickness Spacer)(Terminal Length=3.7mm)										
						.00±0.1														
				0°±1°		—		scale —												
				dr	MINI K VANDANATH		2018-09-14				dwg no				sheet 1 of 1				size	
				engr	C BINESH		2018-09-14				BS, C ,201419, 051				A3					
				chr	C BINESH		2018-09-14													
				appd	BIJU K PAUL		2018-09-14													
sheet index		revision sheet		A	1															

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[HM2S10PD51M0ABLF](#)