




Heyco® PVB 101 Single Diode Solar Junction Box

For Single Diode, Double Ribbon Photovoltaic Panels

- Highest performance rated axial diode on the market for a single diode box application.
- Low insertion force connection of PV ribbons for quick and easy assembly with no soldering.
- Low profile single panel design to accommodate a two ribbon panel.
- Cable strain relief incorporated in box.
- Practical internal volume and venting for good thermal dissipation and low interior temperatures.
- IP65 rated.
- RoHS and REACH compliant eco-friendly solderless internal connections.
- Sizeable opening for conductor ribbons.
- Ambient temperature range of -40°F (-40°C) to 221°F (105°C) (UL).
- UL recognized under file E325860.

PART NO.	DESCRIPTION	PART DIMENSIONS													
		A Box Length		B Box Width		C Max O.A. Height		D Max O.A. Length		E Max O.A. Width		F Centerline of Leads		G* O.A. Length inc. Leads	
		in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
S6115	PVB 101	5.38	136,6	1.77	45,0	1.09	27,6	5.84	148,3	2.14	54,3	.50	12,7	78.00	1981,2

*Junction boxes supplied with positive and negative cables in 3 ft. length—contact Heyco for different lengths.

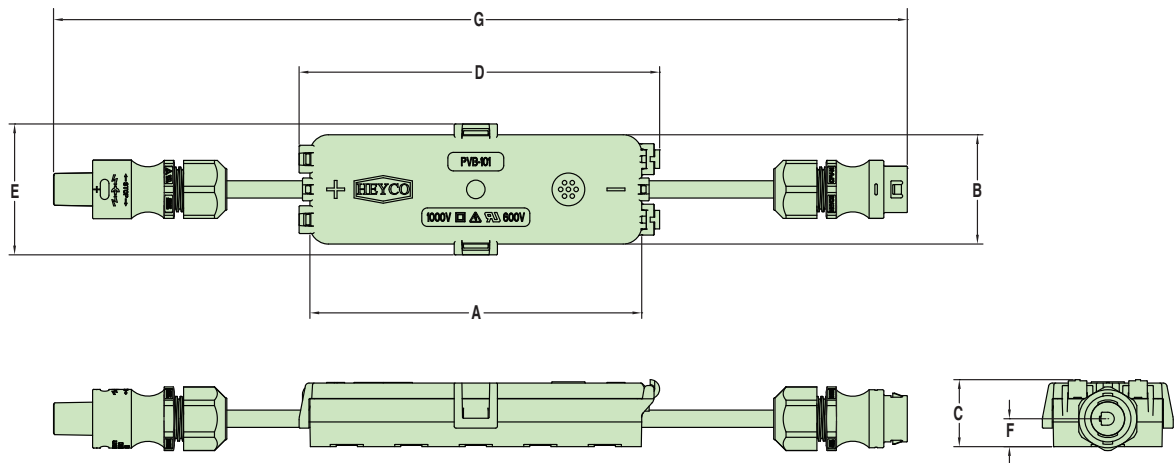

Quick Specs

Material	Polycarbonate housing with UV stability
Certifications	UL Recognized under Underwriters' Laboratories File E325860
Flammability Rating	VO, 5VA
Temperature Rating	-40°F (-40°C) to 221°F (105°C)
IP Rating	IP 65

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[S6115](#)