



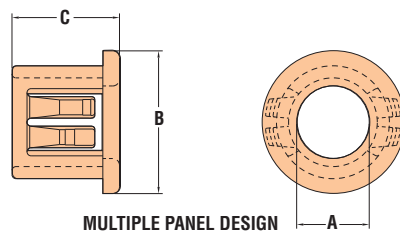

Heyco® Snap Bushings

Mounting Hole Diameter Range: .250" (6,4 mm) to .875" (22,2 mm)

- Convert raw-edged holes to smooth, neat, insulated holes.
- Insulate and mechanically protect electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Locking fingers snap into holes with fingertip pressure.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Withstand a push back force of 35 pounds.
- Available in multiple sizes for use in .250" (6,4 mm) to 6.00" (152,4 mm) diameter holes.
- We offer the following brass-colored parts for lamp and lighting applications:
Part No. 2012, SB 312-3 Brass
Part No. 2033, SB 375-4 Brass
Part No. 2041, SB 437-4 Brass

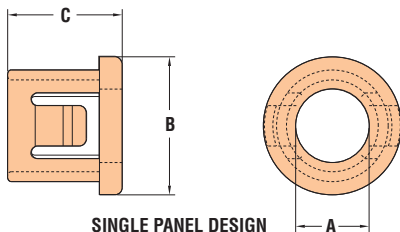

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	A		PART DIMENSIONS		C					
		Black	White		Inside Diameter	B Head Diameter	Overall Height							
in.	mm.				in.	mm.	in.	mm.	in.	mm.				
Single Locking Step for Panel Thickness up to .040" (1,0 mm)														
.250	6,4	2003	2004	SB 250-040	.13	3,2	.31	7,9	.31	7,9				
Single Locking Step for Panel Thickness up to .062" (1,6 mm)														
.250	6,4	2000	2001	SB 250-2	.14	3,6	.31	7,9	.31	7,9				
.312	7,9	2010	2011	SB 312-3	.19	4,8	.38	9,5						
Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)														
.375	9,5	2020 2030	2021 2031	SB 375-3 SB 375-4	.19 .25	4,8 6,4	.47	11,9	.41	10,3				
.437	11,1	2042 2038 2043	2037 2039 2044	SB 437-243 SB 437-4 SB 437-5	.24 .27 .31	6,2 6,8 7,9	.53	13,5						
		.500	12,7	2058 2049 2053	2059 2050 2054	SB 500-4 SB 500-5 SB 500-6	.25 .31 .39	6,4 7,9 9,9			.57	14,5		
				.562	14,3	2060 2063 2066	2061 2064 2067	SB 562-5 SB 562-6 SB 562-7			.31 .39 .44	7,9 9,9 11,1	.66	16,7
.625	15,9					2075 2070 2073	2078 2071 2074	SB 625-4 SB 625-7 SB 625-8			.25 .44 .50	6,4 11,1 12,7	.72	18,2
		.687	17,4			2083 2086	2084 2087	SB 687-8 SB 687-9			.50 .56	12,7 14,3	.78	19,8
				.750	19,1	2090 2092 2093 2096	2091 2099 2094 2097	SB 750-6 SB 750-8 SB 750-9 SB 750-10			.39 .50 .56 .61	9,9 12,7 14,3 15,5	.85	21,6
.812	20,6	2100 2103	2101 2104			SB 812-9 SB 812-10	.56 .63	14,3 15,9			.89	22,6		
		.875	22,2			2110 2113 2116 2120 2123 2126	2111 2114 2117 2121 2124 2127	SB 875-6 SB 875-7 SB 875-8 SB 875-9 SB 875-10 SB 875-11			.38 .44 .50 .56 .63 .69	9,5 11,1 12,7 14,3 15,9 17,5	.95	24,2

Standard colors black and white. Consult Heyco for other colors.

*Quick
Specs*

Material

Nylon 6/6

Certifications



Recognized under the Component Program of Underwriters' Laboratories, File E15331



Certified by Canadian Standards Association, File 8919

Flammability Rating

94V-2

Temperature Range

-4°F (-18°C) to 221°F (105°C)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Heyco:](#)

[2126](#) [2120](#) [2123](#) [2063](#) [2053](#) [2096](#) [2010](#) [2030](#) [2073](#) [2066](#) [2020](#) [2043](#) [2049](#) [2086](#) [2000](#) [2058](#) [2038](#) [2092](#)
[2070](#) [2083](#) [2116](#) [2042](#) [2060](#) [2113](#) [2033](#) [2041](#) [2012](#) [2032](#) [2040](#) [2013](#) [2288](#) [2287](#) [2479-P](#) [2073-P](#) [2126-P](#)
[2053-P](#) [2470-P](#) [2484-P](#) [2417-P](#) [2409-P](#) [2166-P](#) [2141-P](#) [2139](#) [2200](#) [2212](#) [2402](#) [2402AA](#) [2043CL](#) [2165](#) [2000HX](#)
[2000GY](#) [2419](#) [2000JC](#) [2424-P](#) [2461-P](#) [2210-P](#) [2407-P](#) [2420-P](#) [2096-Q](#)