

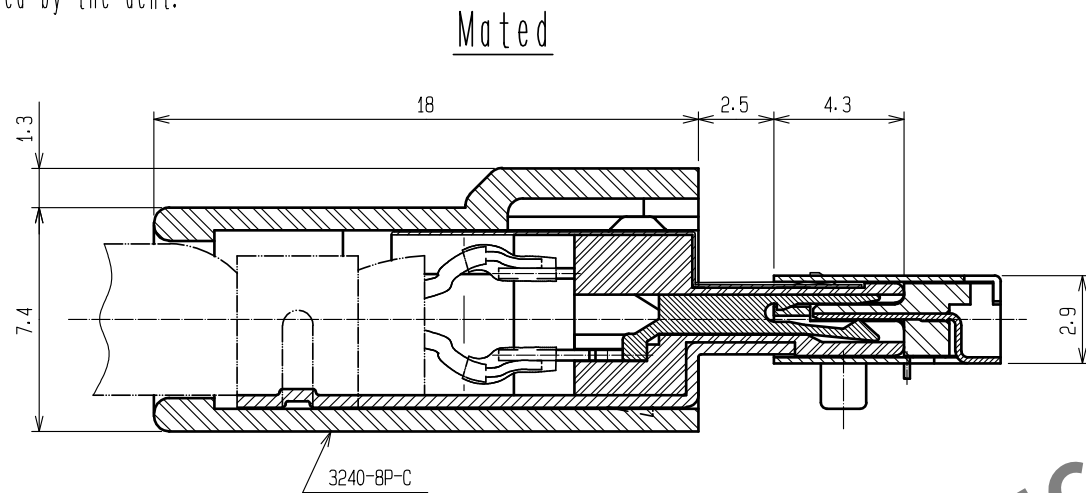
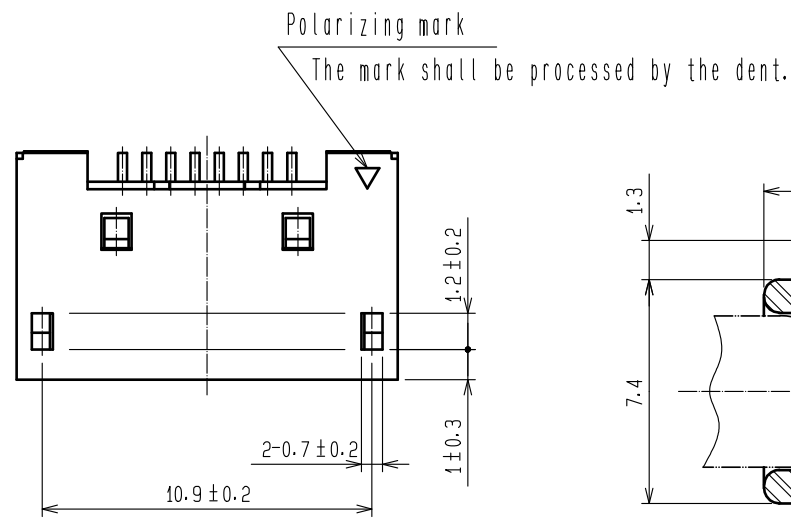
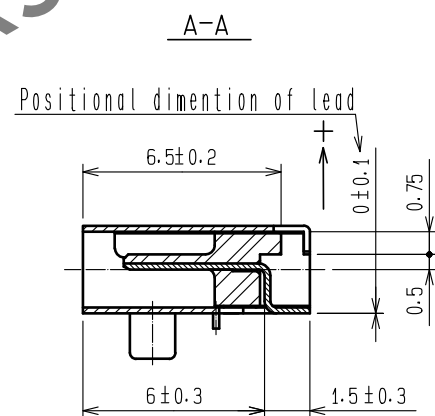
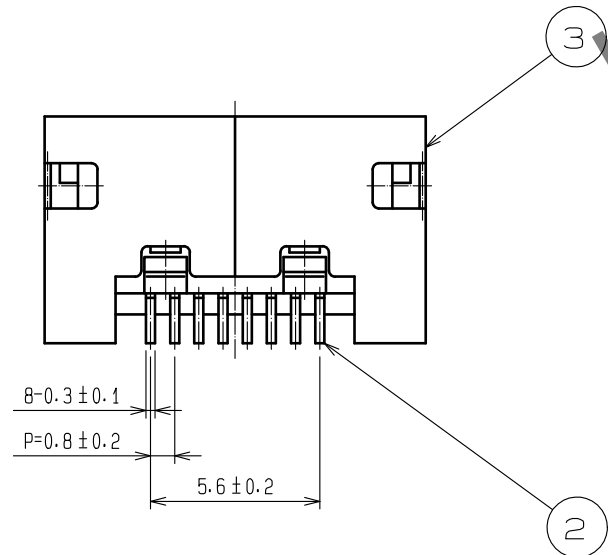
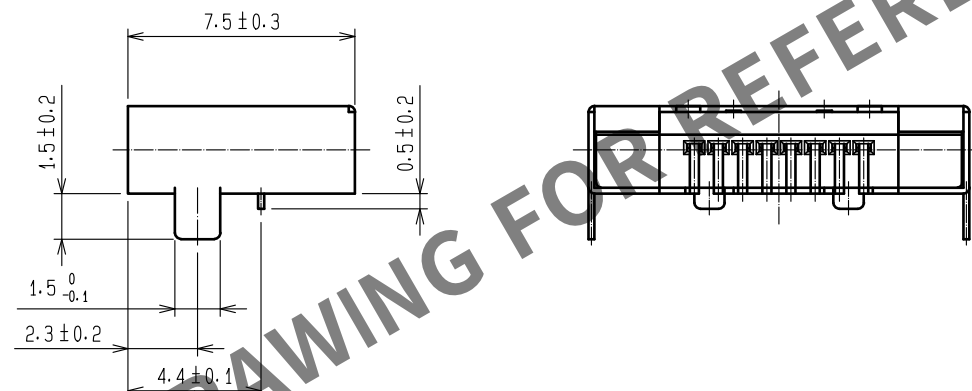


A
B
C
D
E
F

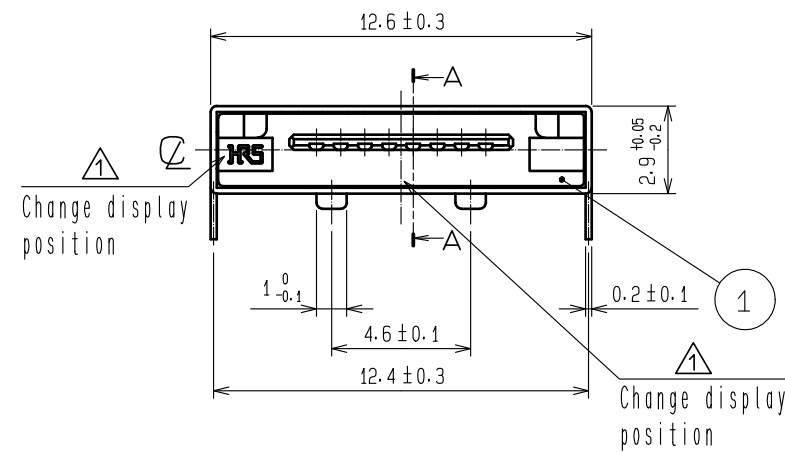

Recommended PC Board pattern
(Mounting side)

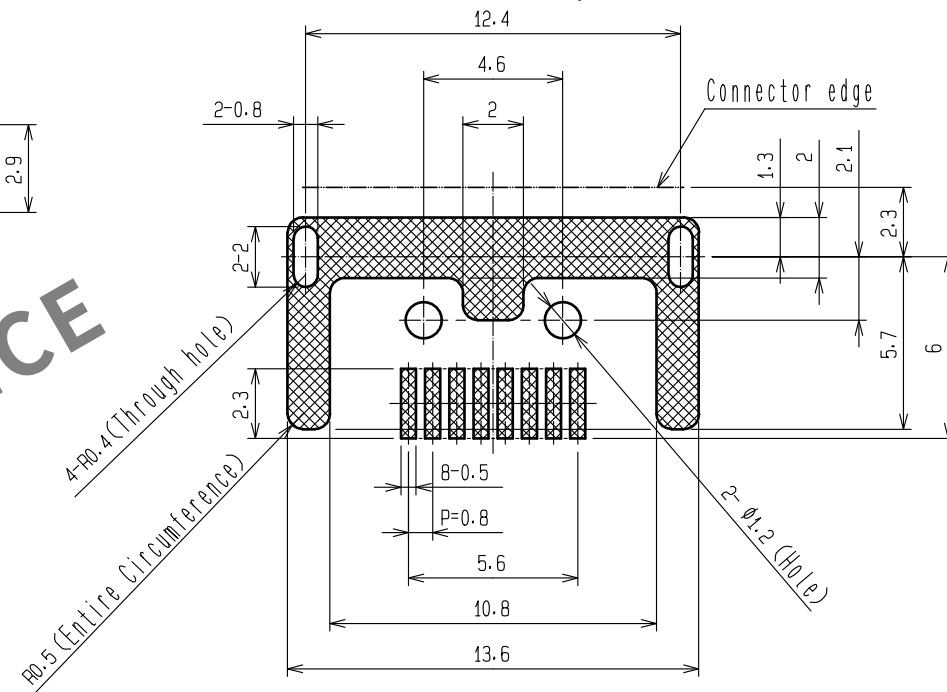

- Notes 1. Lead coplanarity to be 0.1 max.
2. All dimensions without tolerance are dimensions for reference.

			3		STAINLESS STEEL	SELECTIVE AREA : GOLD 0.03#m MIN. UNDER PLATING : NICKEL 0.2#m MIN.			
			2		PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.2#m MIN. LEAD AREA : GOLD 0.03#m MIN. UNDER PLATING : NICKEL 2#m MIN.			
1	PPS	UL94V-0 (BLACK)							
NO.	MATERIAL	FINISH, REMARKS			NO.	MATERIAL	FINISH, REMARKS		
UNITS mm		SCALE 4 : 1		COUNT 2	DESCRIPTION OF REVISIONS DIS-E-00002550		DESIGNED TA. TORIHARA	CHECKED MN. KENJO	DATE 20190920
 HIROSE ELECTRIC CO., LTD.		APPROVED : A0. SUZUKI			20060510		DRAWING NO. EDC3-046586-02		
		CHECKED : NF. MIYAZAKI			20060510		PART NO. 3260-8S3(55)		
		DESIGNED : HN. ANDO			20060510		CODE NO. CL232-0010-5-55		
		DRAWN : HN. ANDO			20060510		 		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[3260-8S3\(55\)](#)