




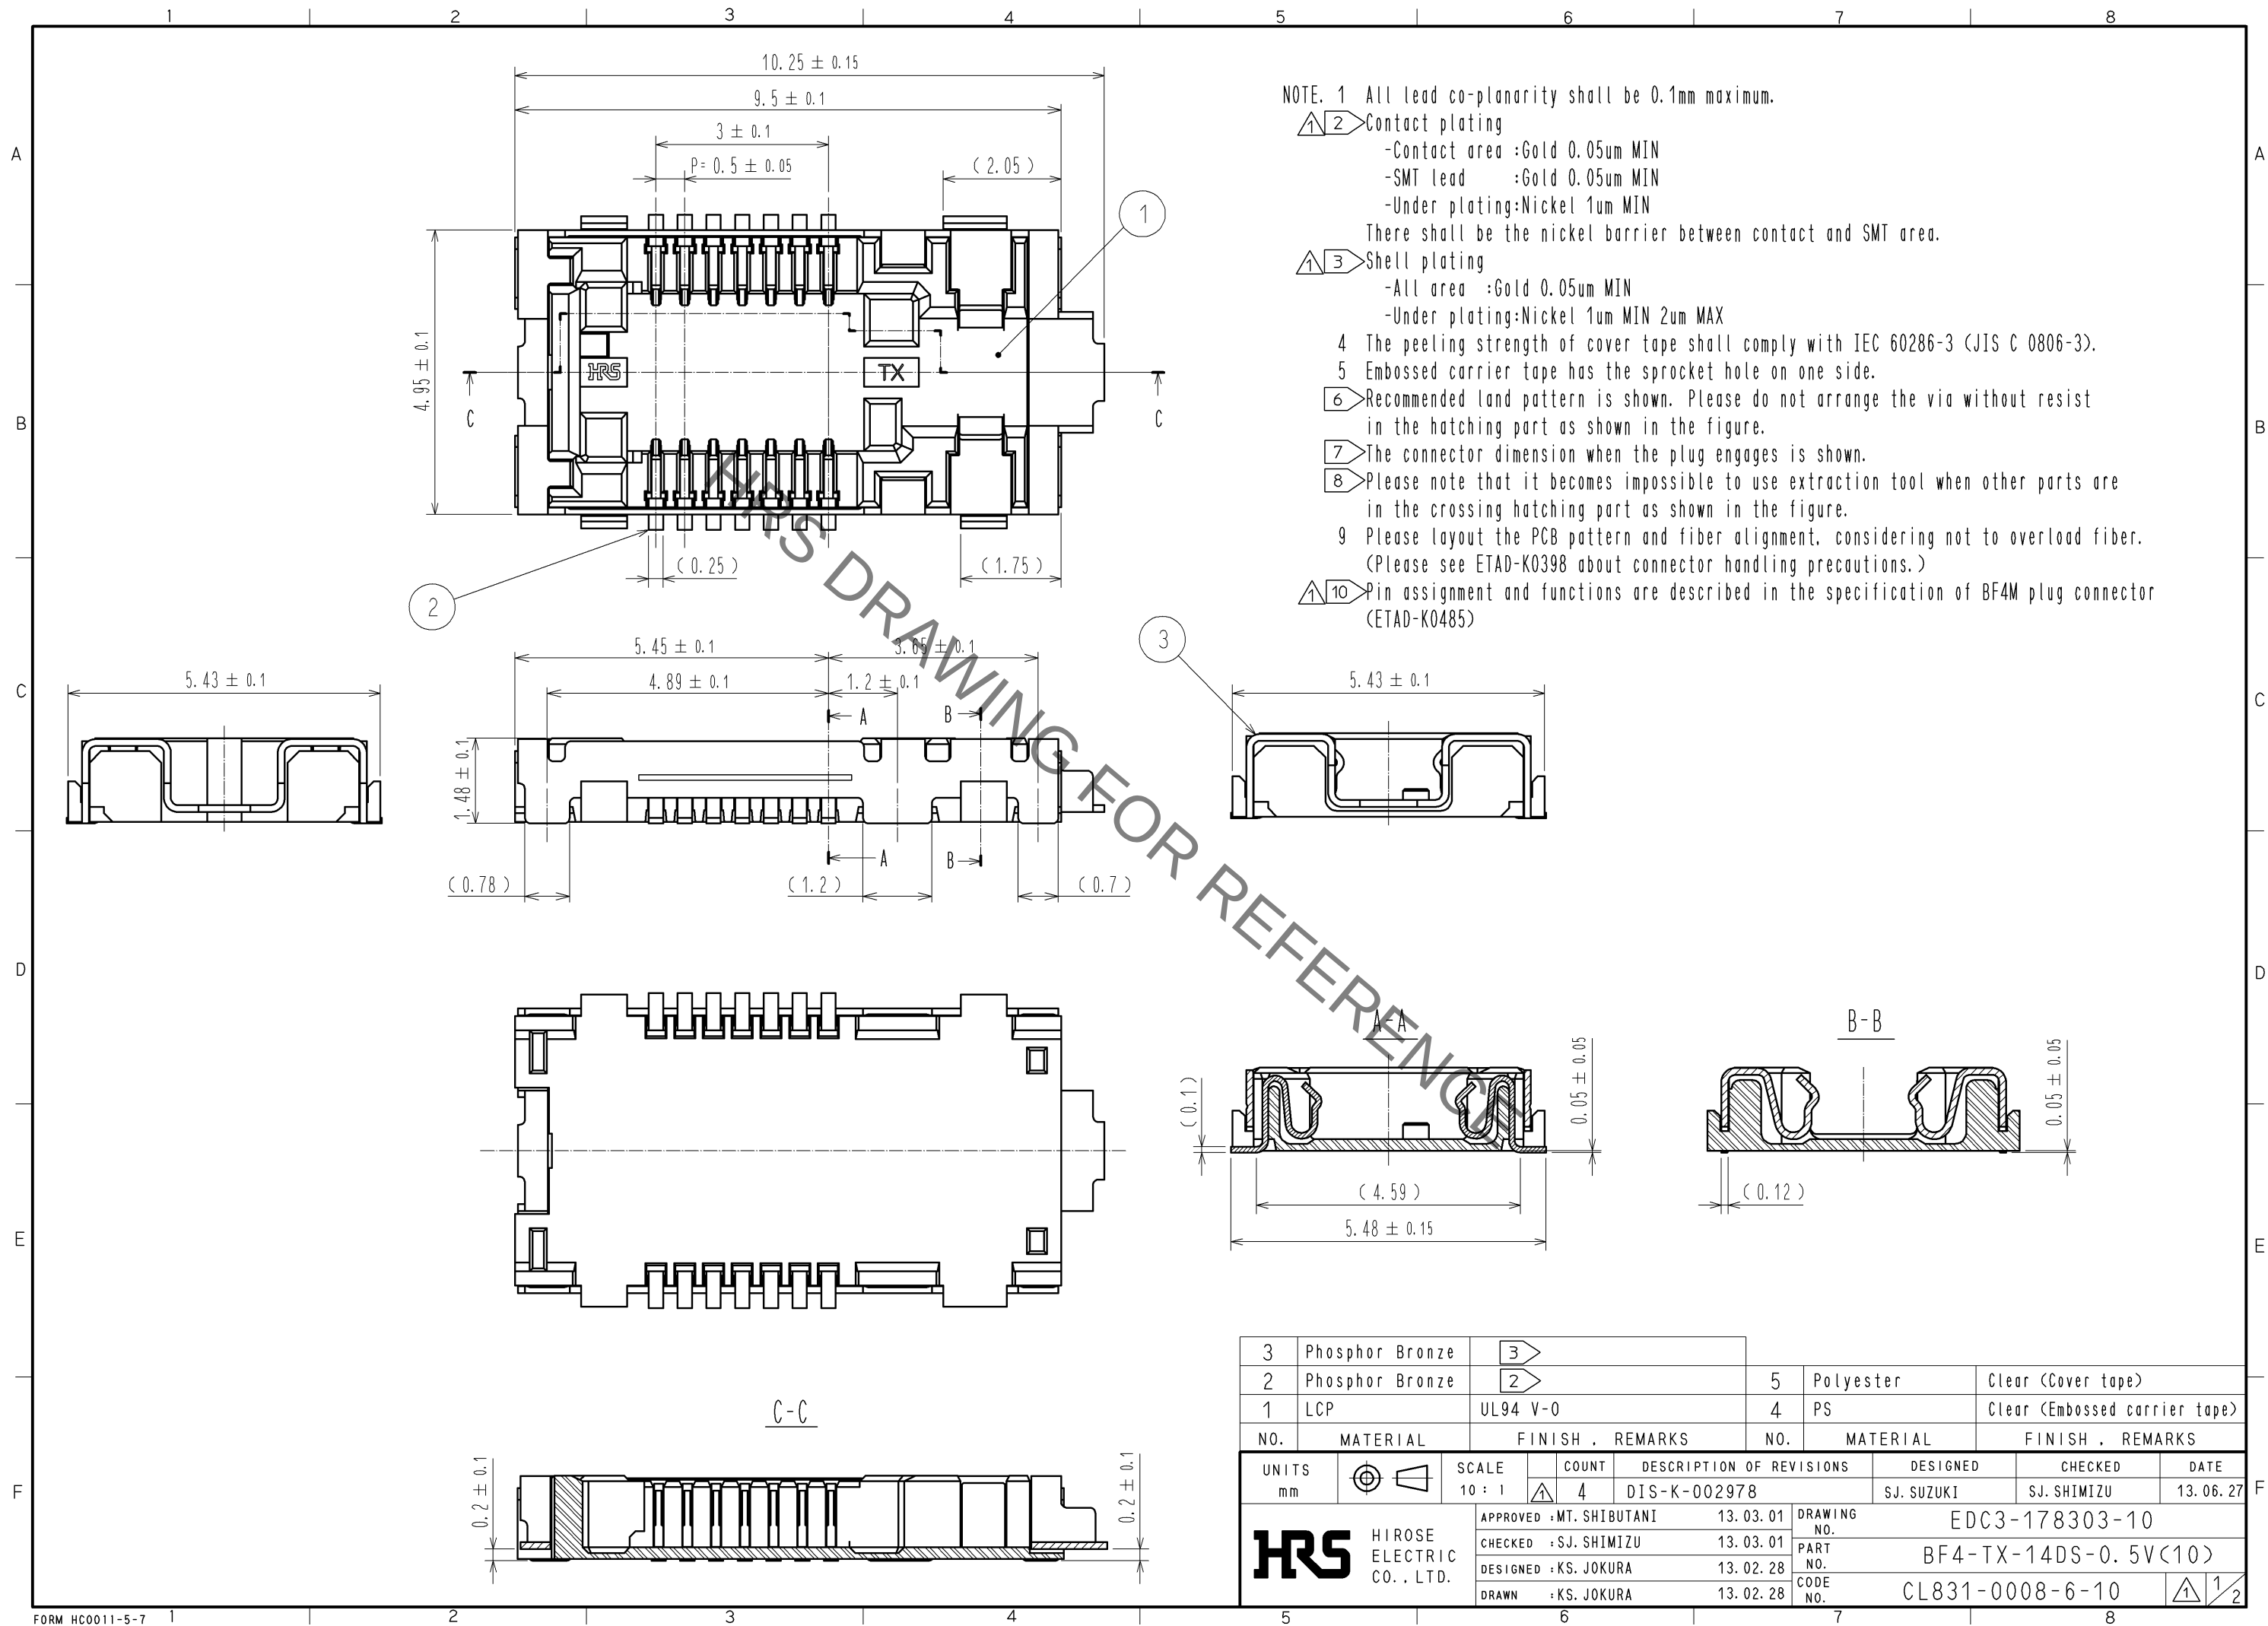


Recommended reflow temperature profile  
using Lead-Free solder paste.

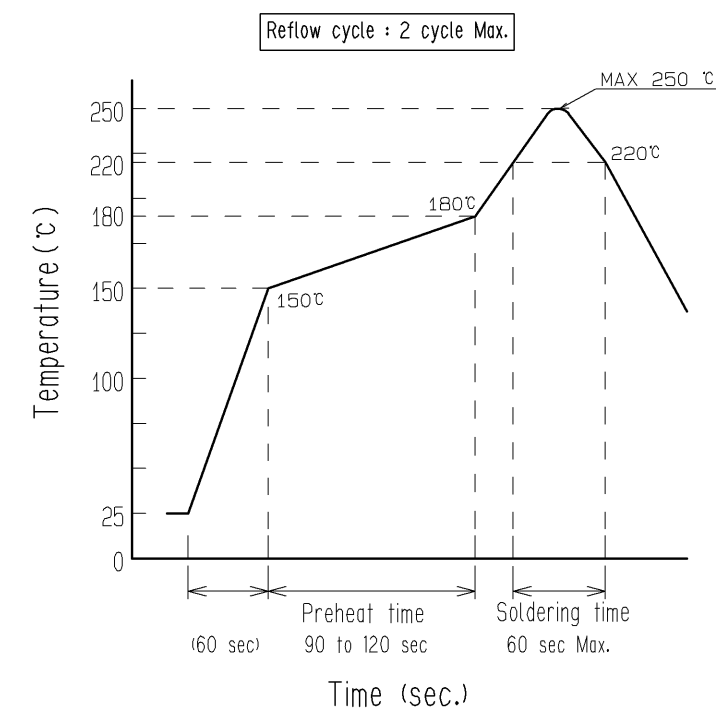

7 Dimensions of engaged connector (Scale : FREE)

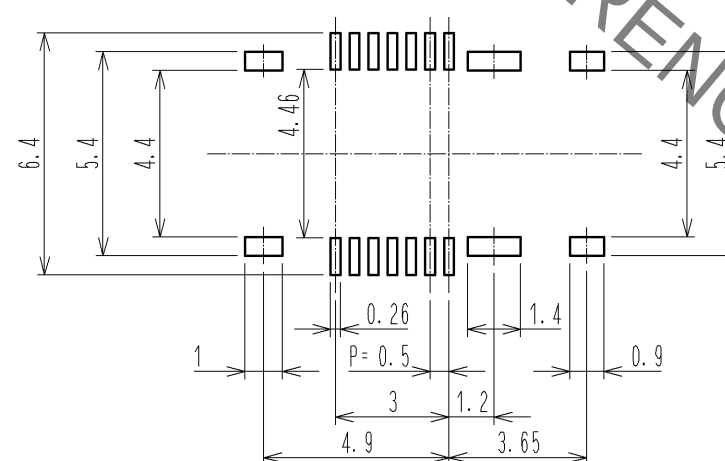

Aperture ratio  
 Pads mounted contacts : 70%  
 Pads mounted shell : 100%

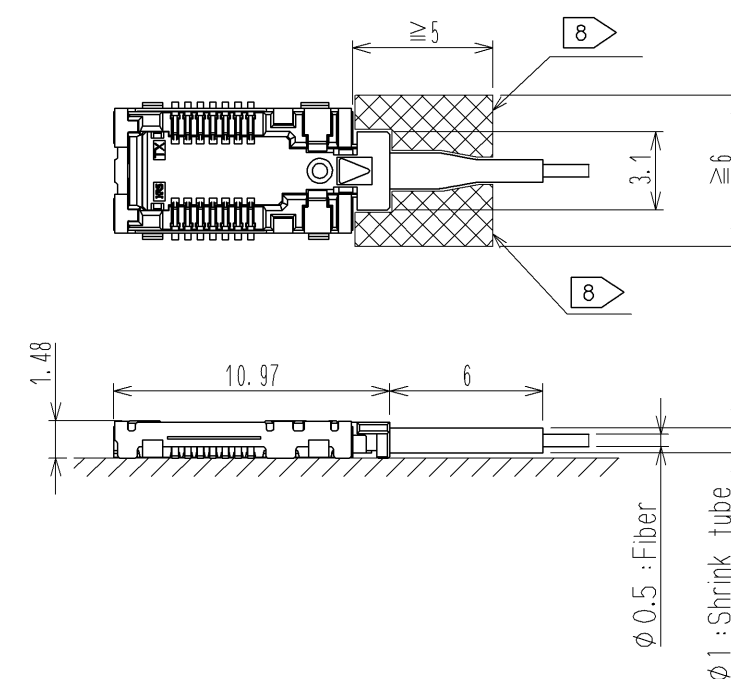

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[BF4-TX-14DS-0.5V\(10\)](#)