



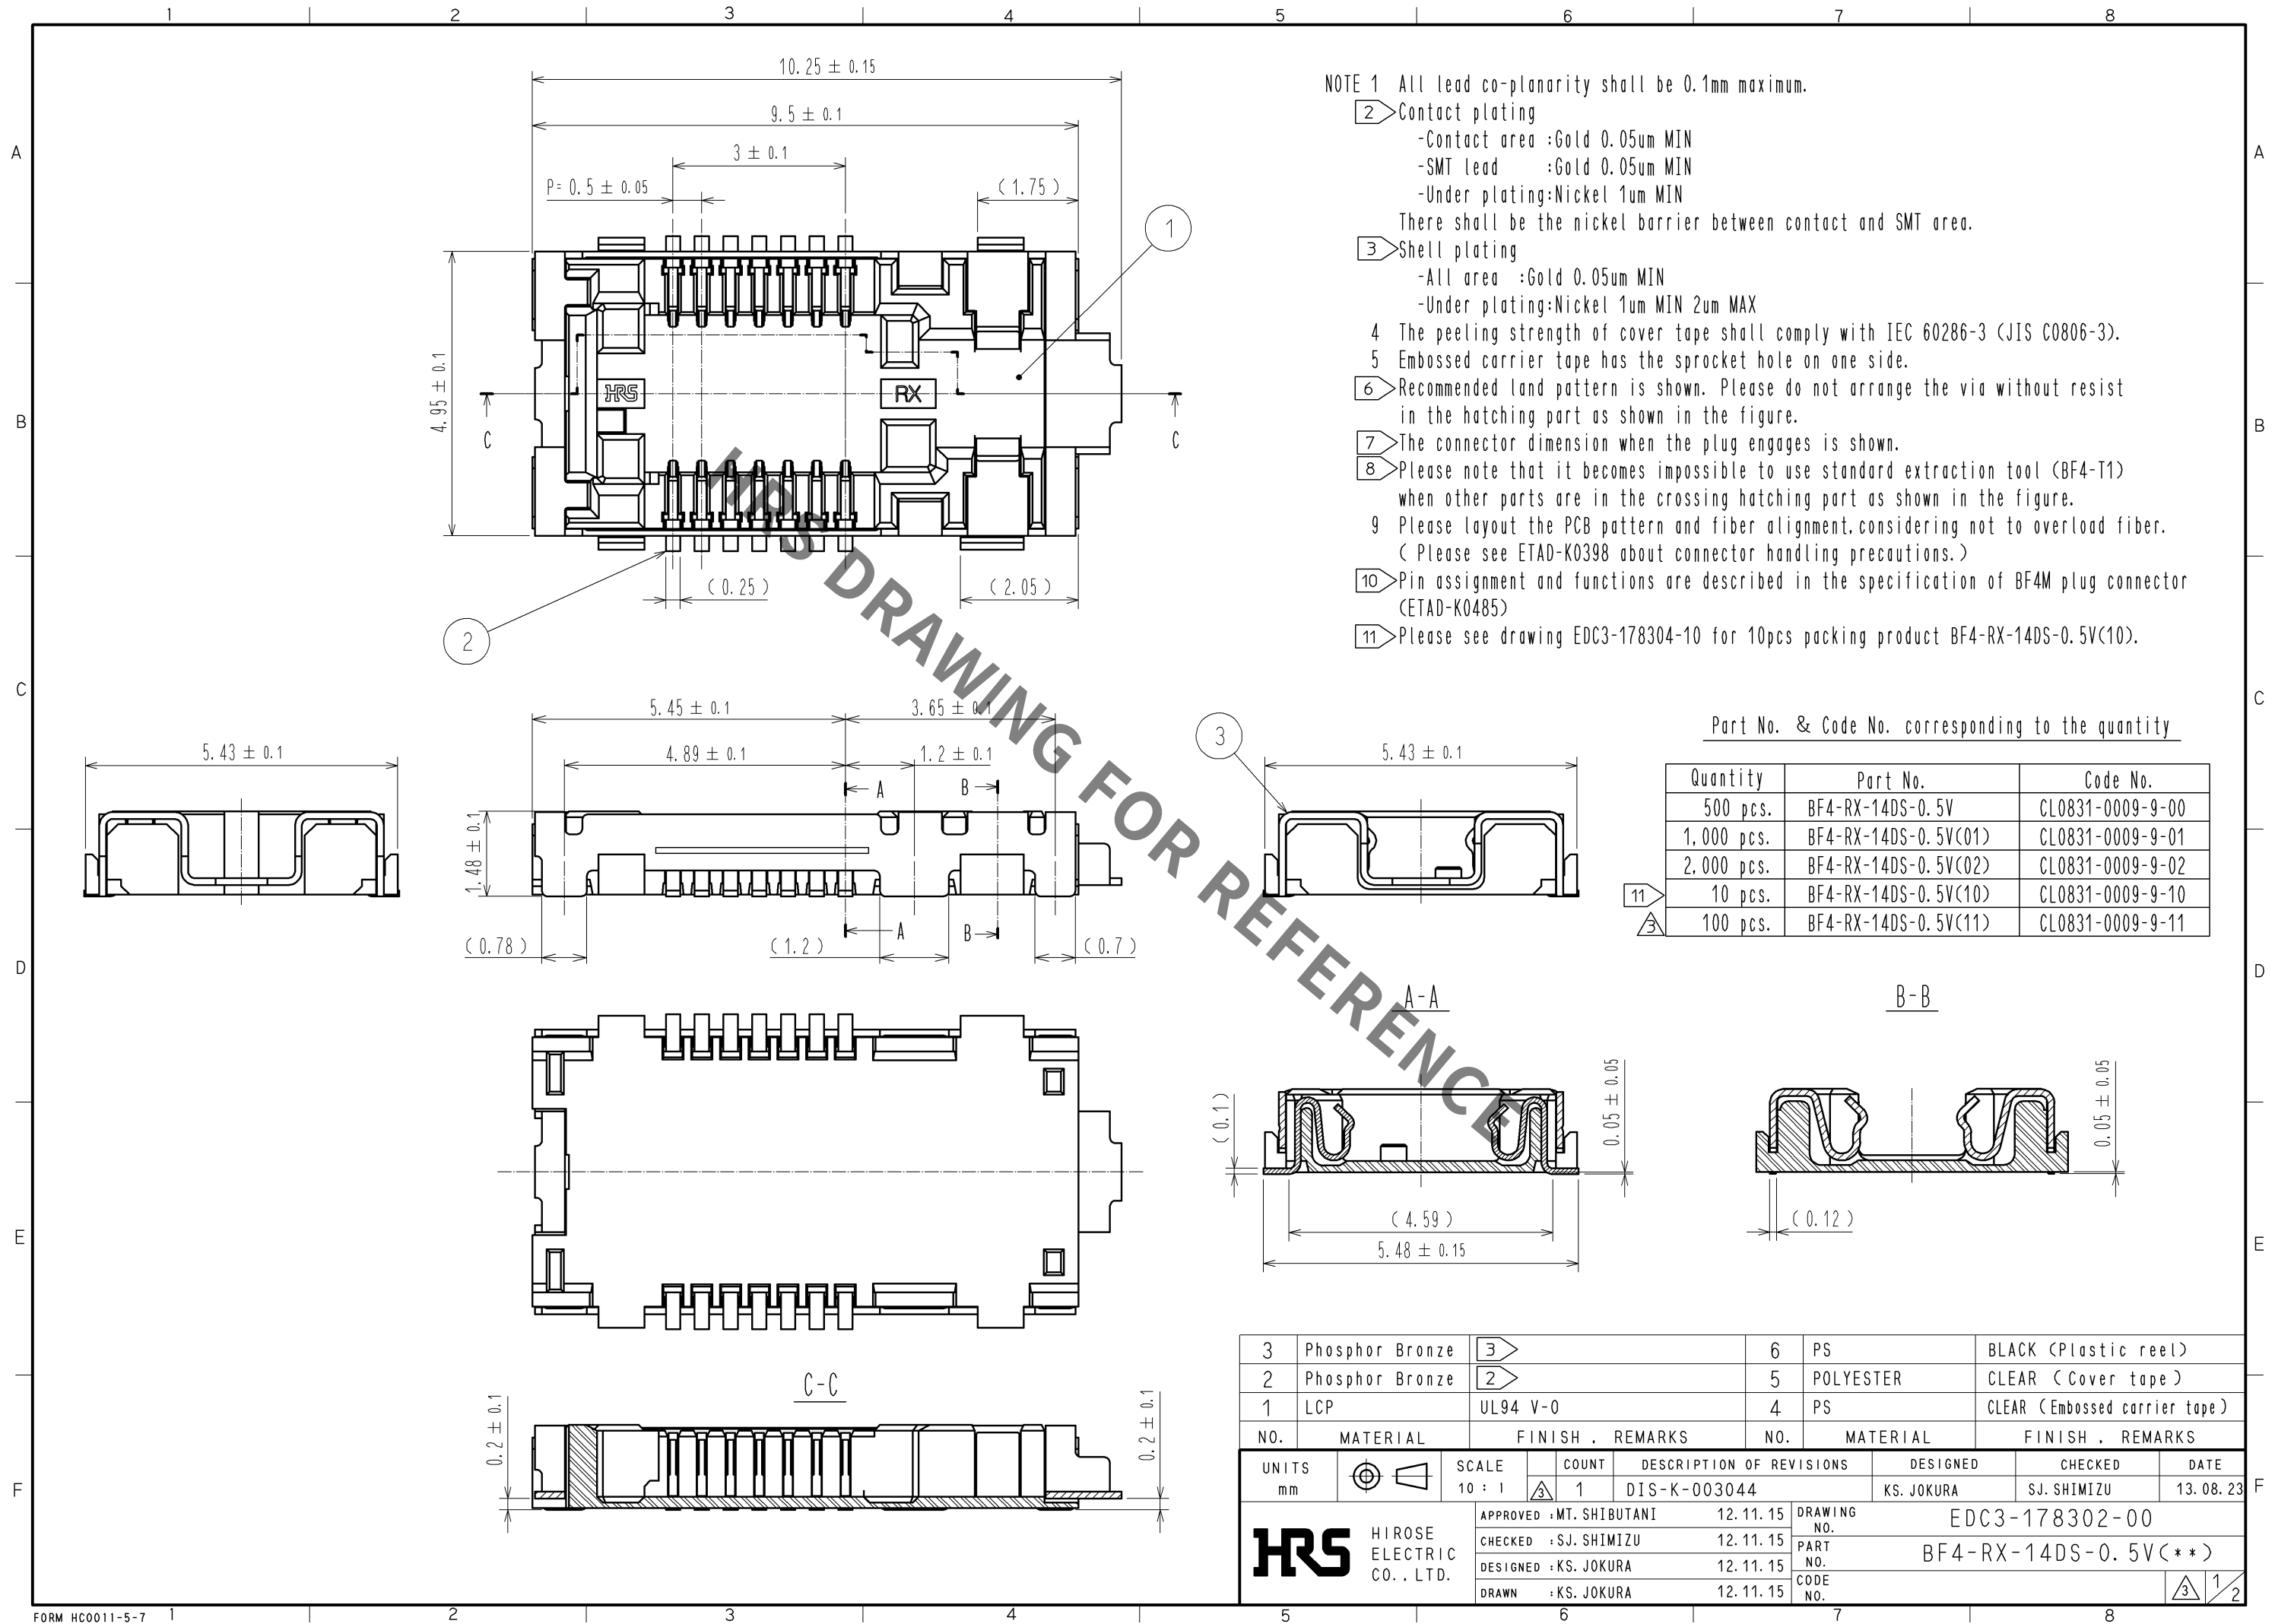


Jul.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


Dimensions of embossed carrier tape (Scale : FREE)

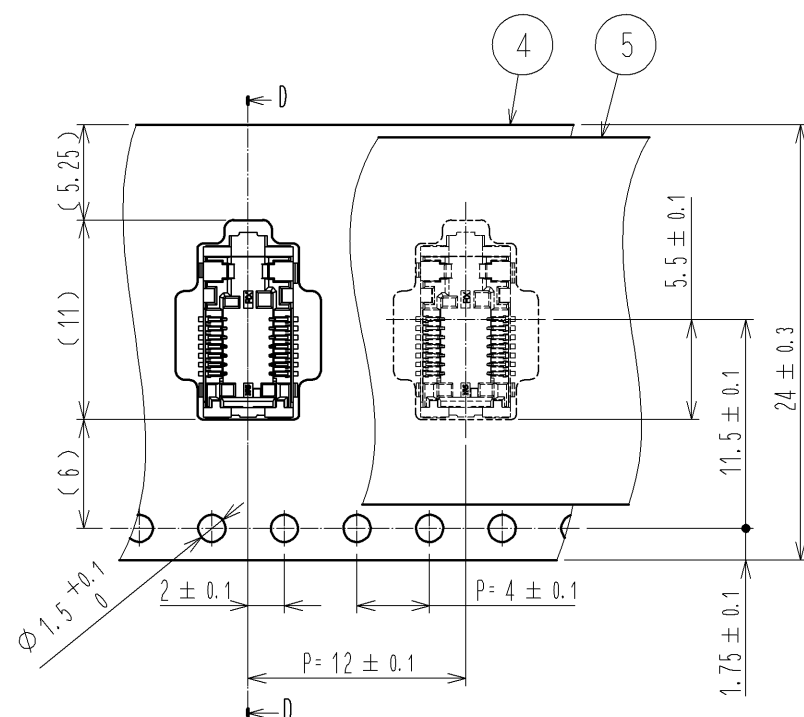


Packing reel (Scale : FREE)

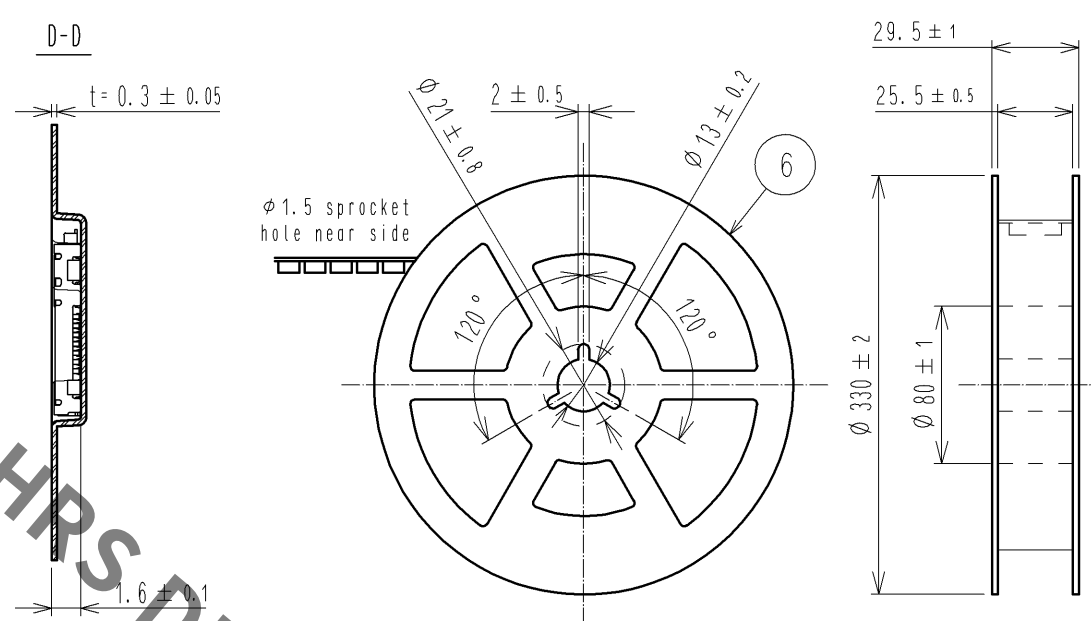


Recommended reflow temperature profile using Lead-Free solder paste.

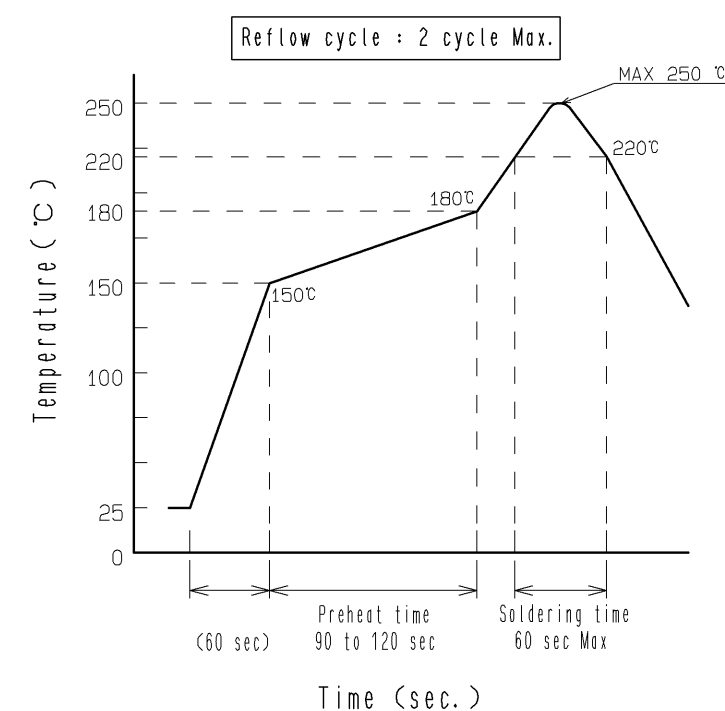


Taping direction (Scale : FREE)

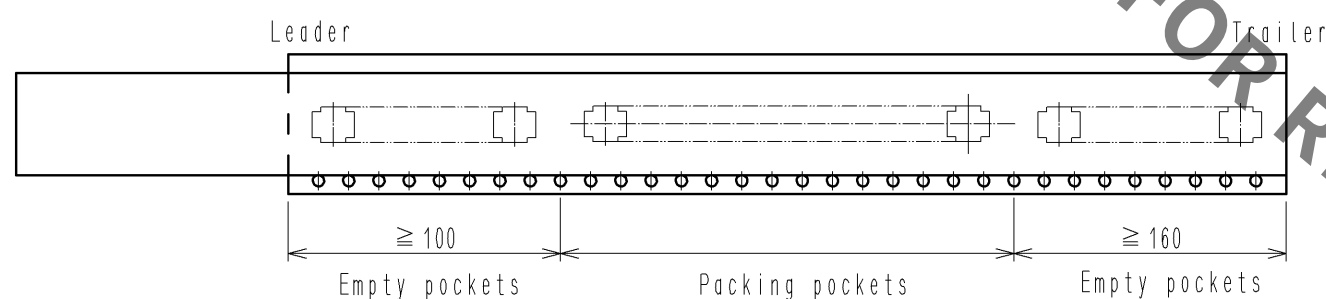


7 Dimensions of engaged connector (Scale:FREE)

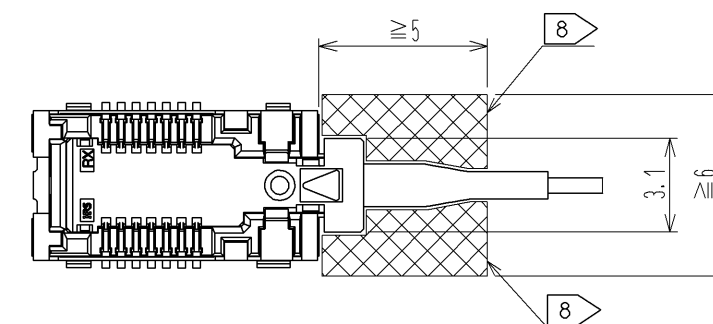


6 Recommended PCB land pattern

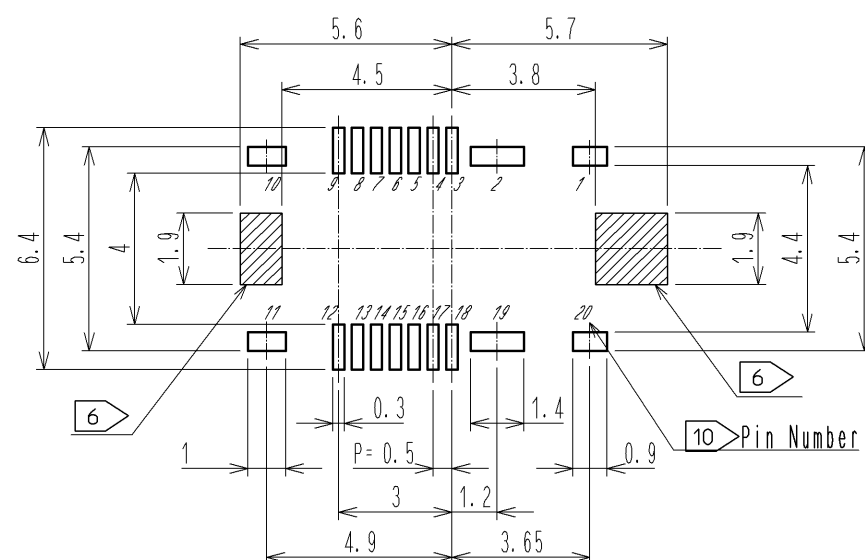

Recommended metal mask dimensions (Mask thickness : 120 μm)

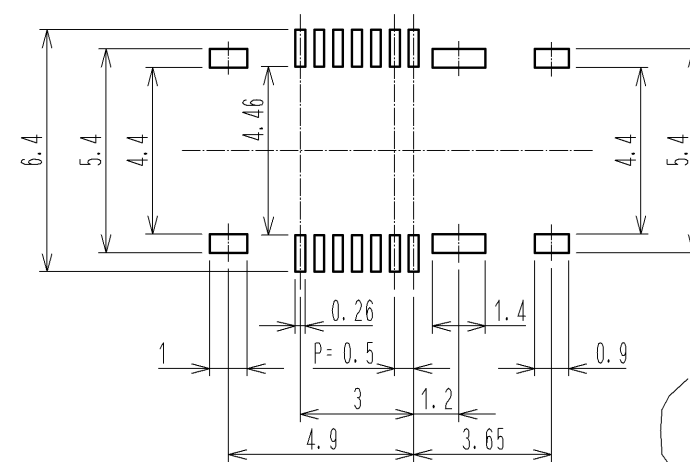

Aperture ratio
Pads mounted contacts : 70%
Pads mounted shell : 100%

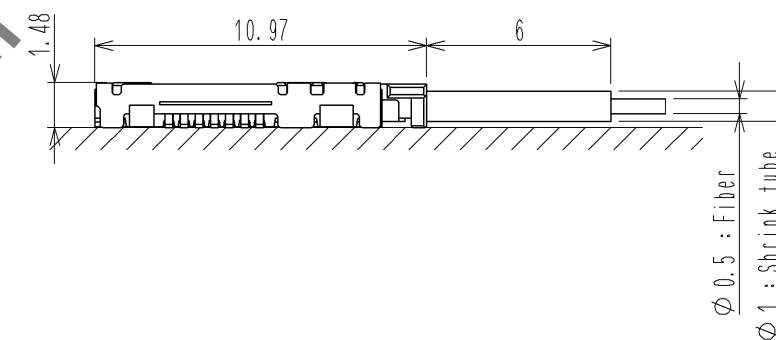

HRS

DRAWING NO.	EDC3-178302-00
PART NO.	BF4-RX-14DS-0.5V(**)
CODE NO.	

3/2/2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[BF4-RX-14DS-0.5V\(01\)](#)