




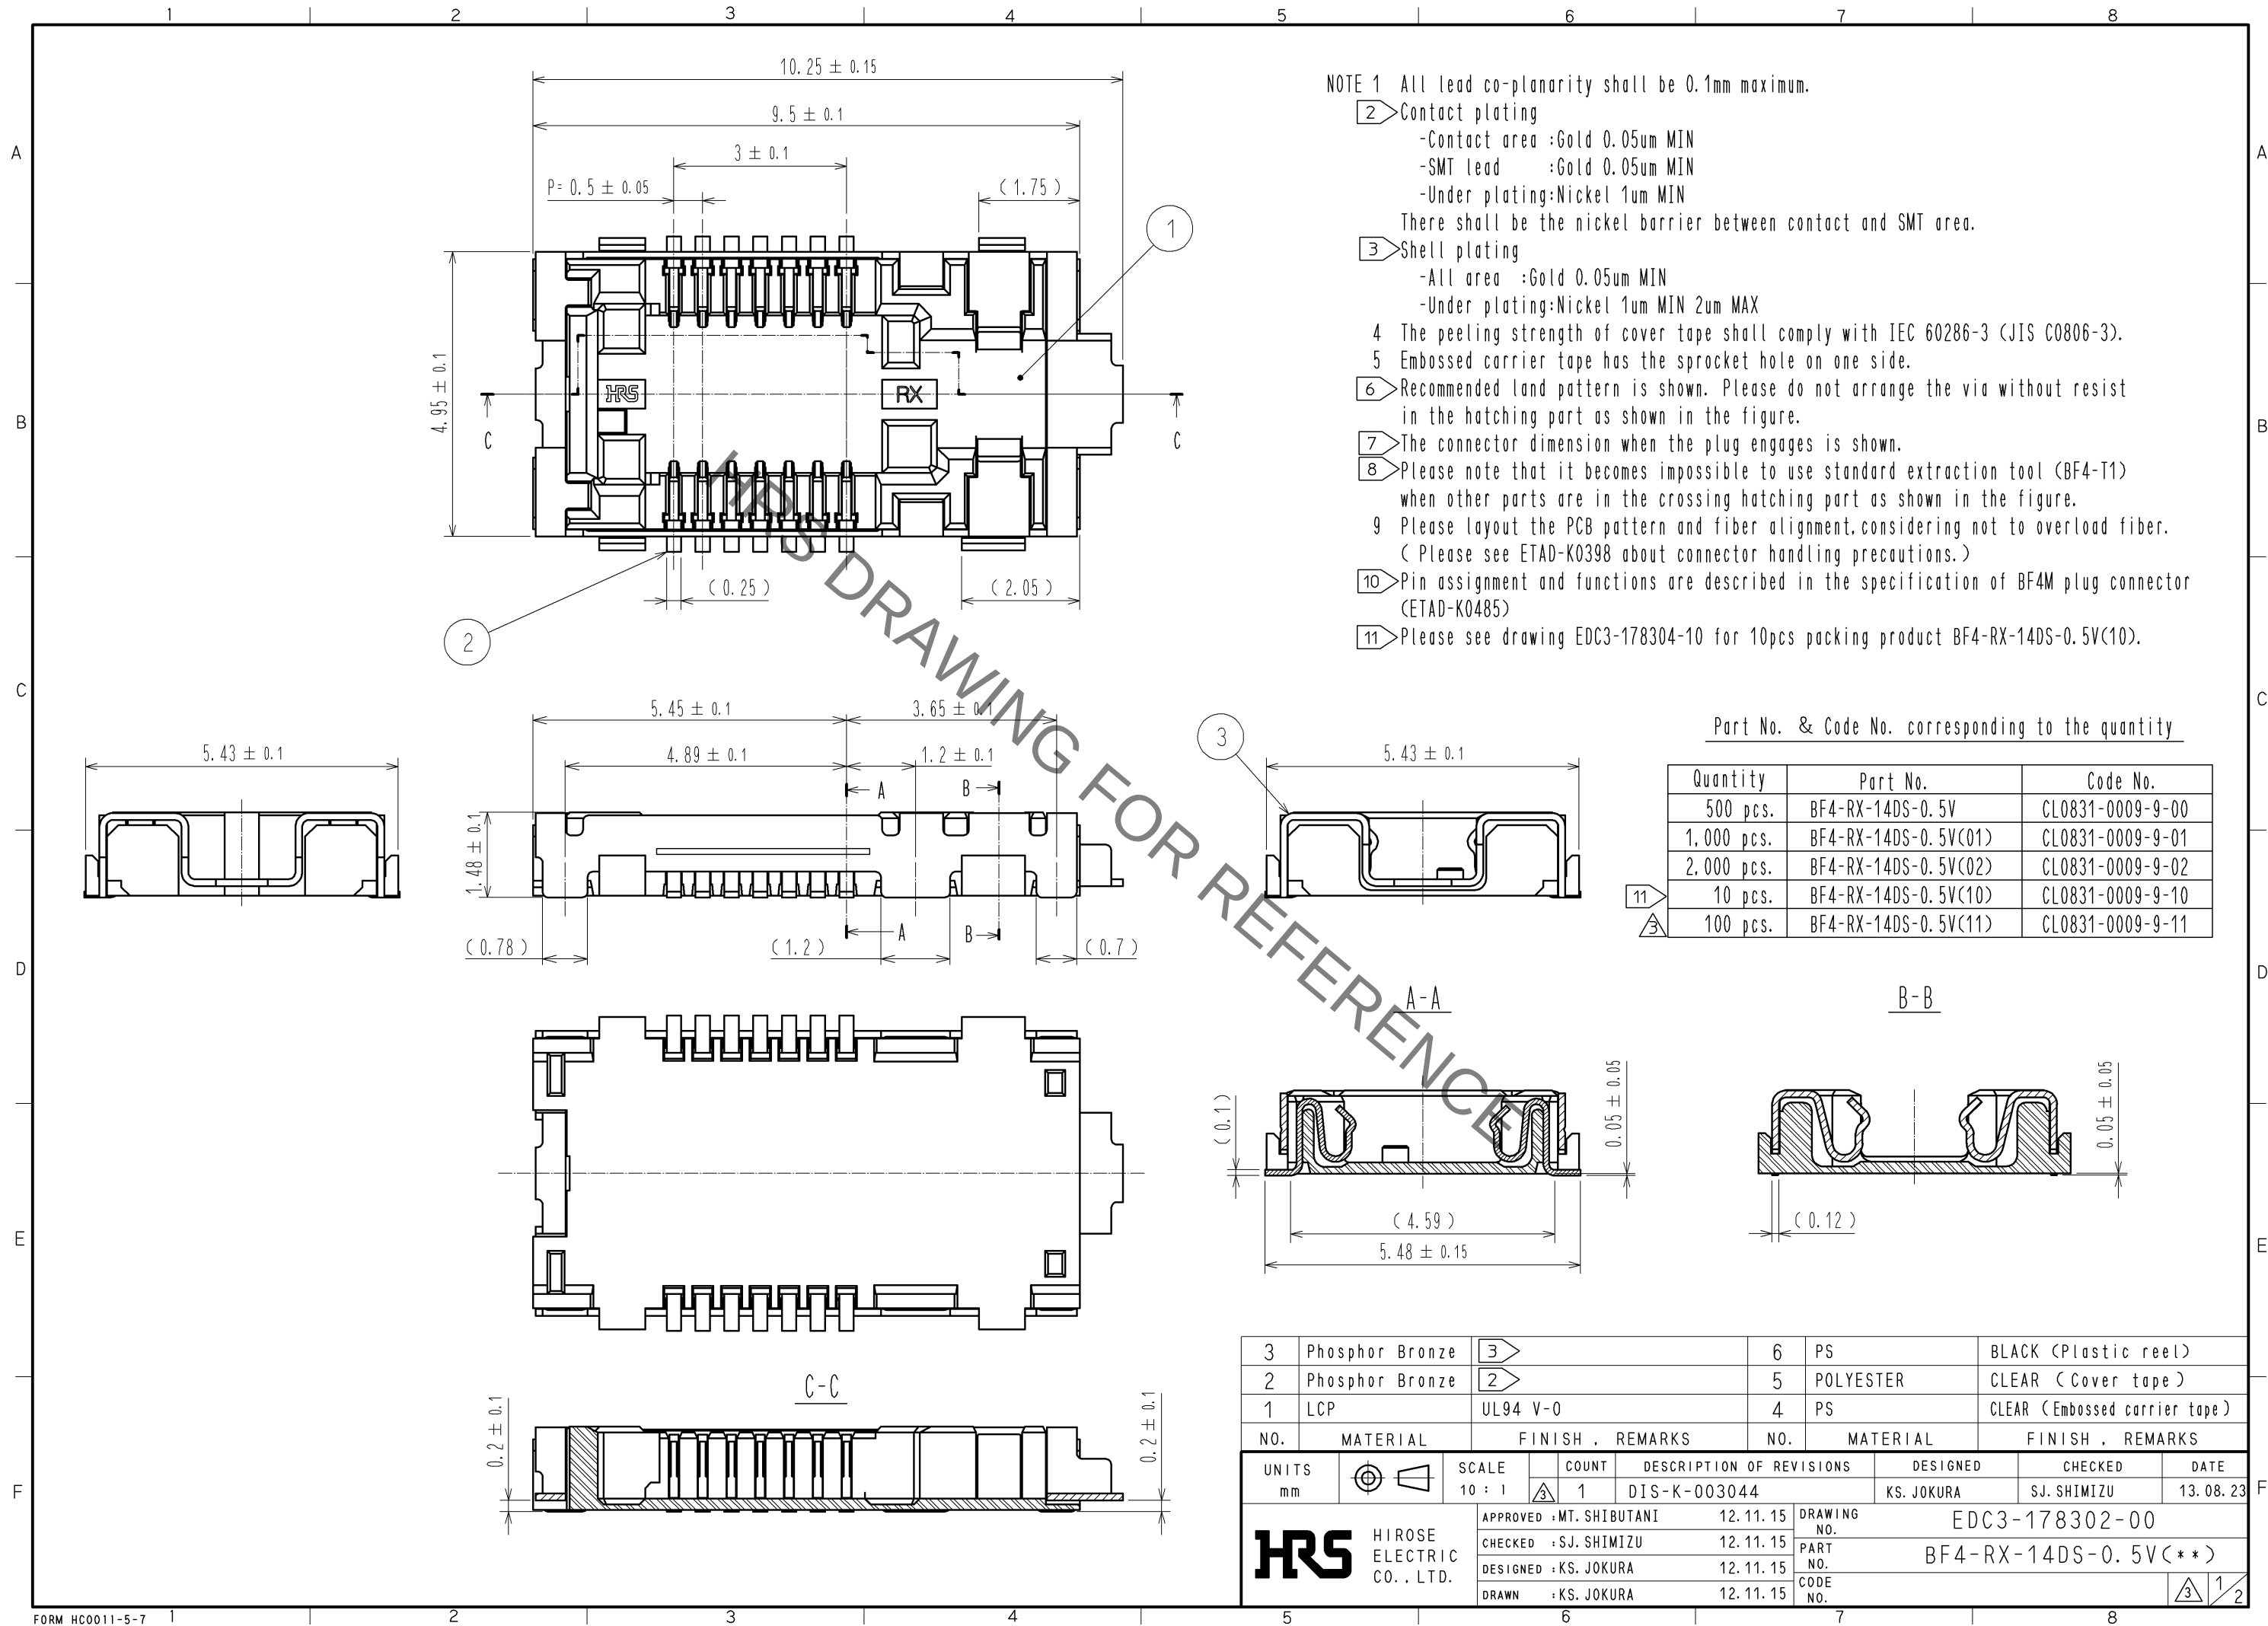


Jul.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Dimensions of embossed carrier tape (Scale : FREE)



Packing reel (Scale : FREE)

Recommended reflow temperature profile
using Lead-Free solder paste.

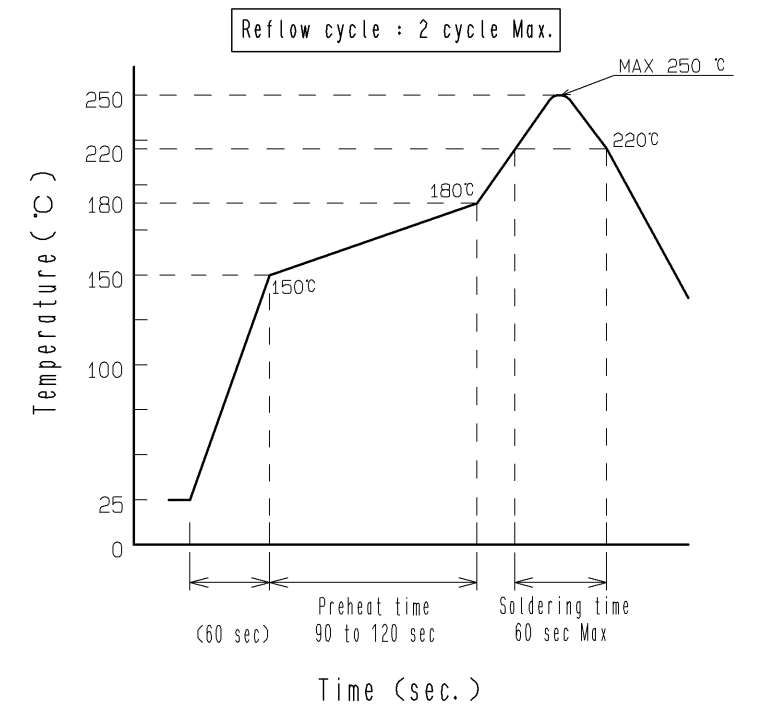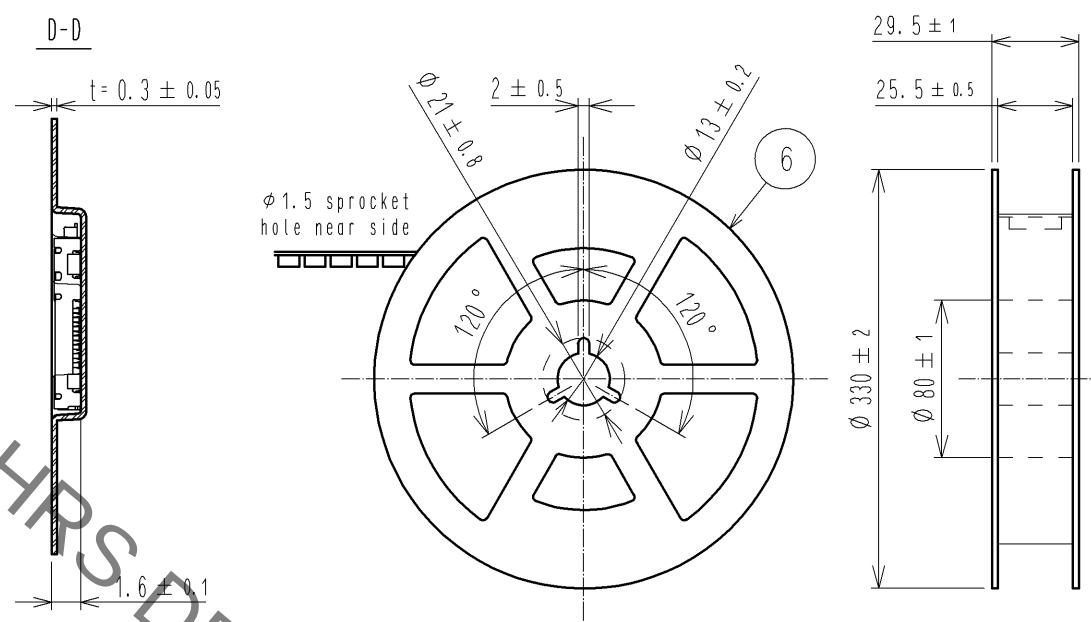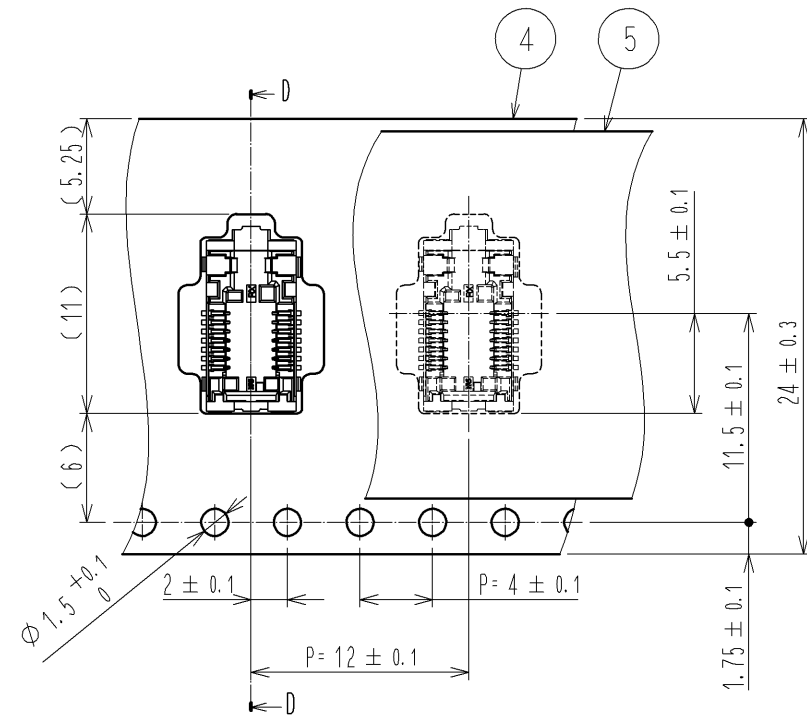




Taping direction (Scale : FREE)

7 Dimensions of engaged connector (Scale:FREE)

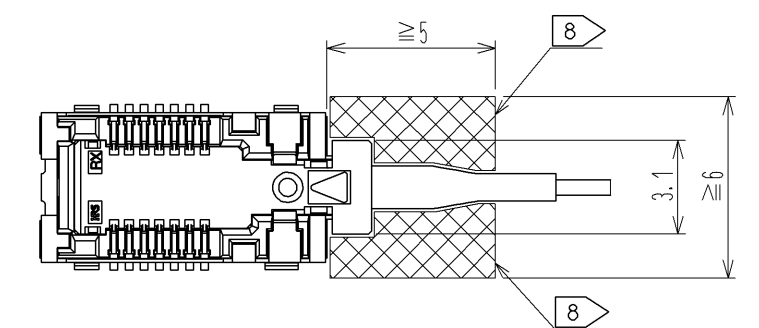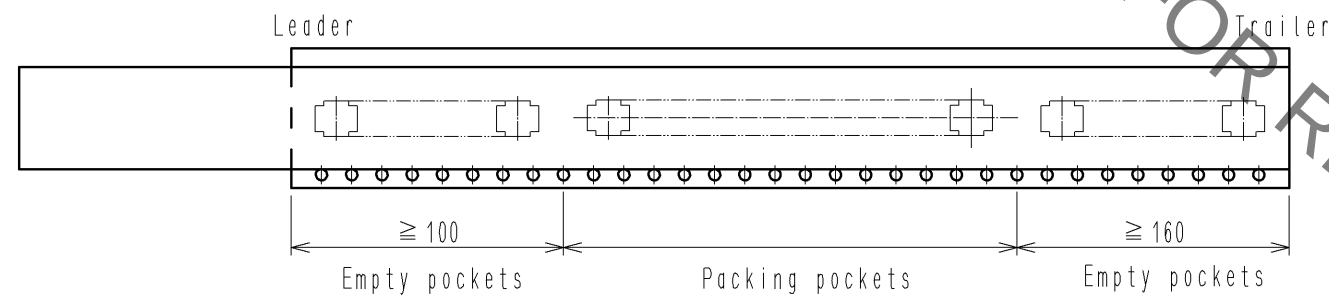

6 Recommended PCB land pattern

Recommended metal mask dimensions
(Mask thickness : $120 \mu\text{m}$)

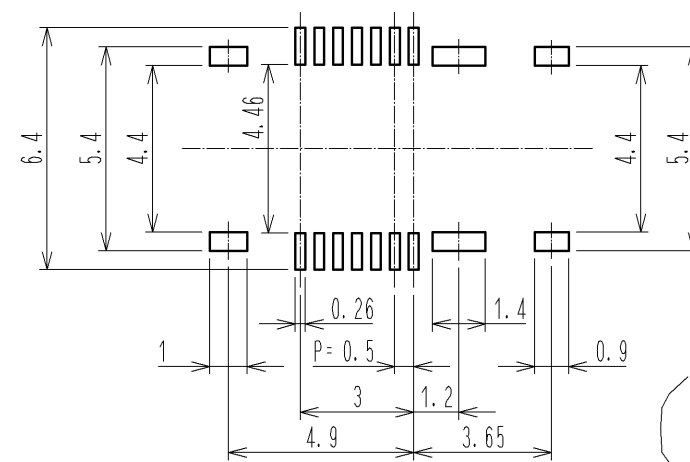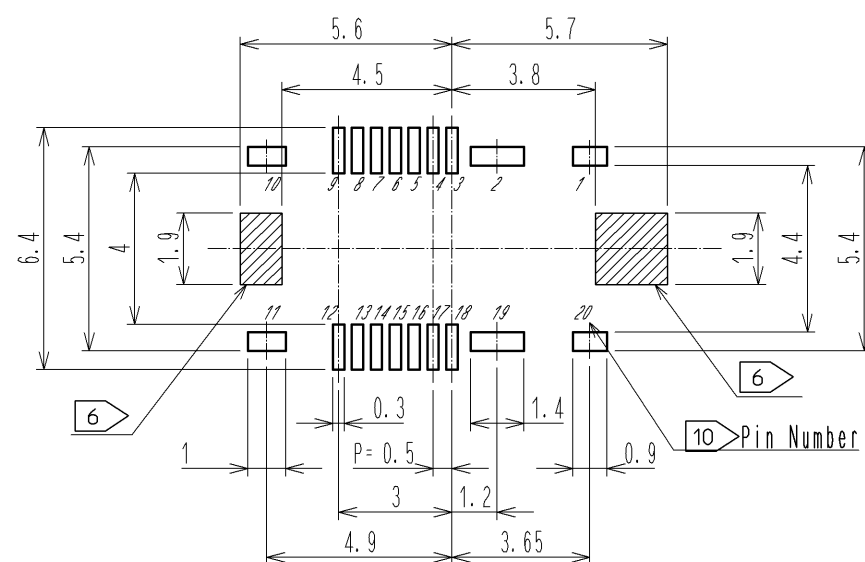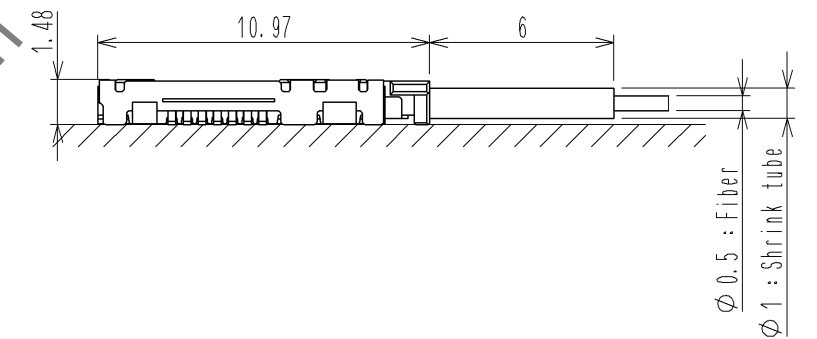

Aperture ratio
Pads mounted contacts : 70%
Pads mounted shell : 100%

HRS	DRAWING NO.	EDC3-178302-00
	PART NO.	BF4-RX-14DS-0.5V(**)
	CODE NO.	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[BF4-RX-14DS-0.5V\(11\)](#)