



Jul.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

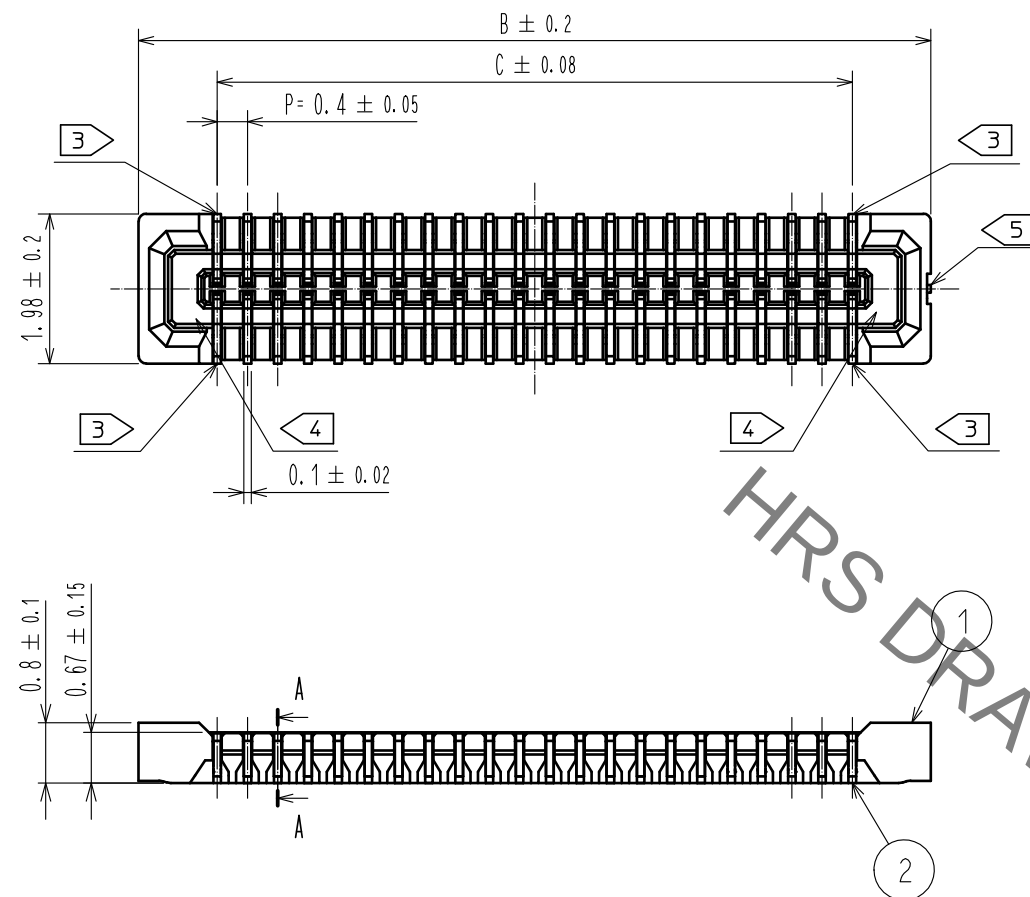


- NOTE) 1. ALL LEAD CO-PLANARITY SHALL BE 0.08mm MAX
2. CONTACT PLATING SPECIFICATIONS.
CONTACT AREA : GOLD 0.05 μ m MIN
SMT LEAD : GOLD 0.05 μ m MIN
UNDERPLATING : NICKEL 1 μ m MIN
(SURFACE : SEALING)
3. EACH CONTACTS AT 4 CORNERS ARE PROVIDED FOR METAL FITTINGS AND GROUNDING PURPOSE.
4. HRS MARK AND CAV NO. ARE INDICATED IN APPROX POSITION SHOWN.
5. GATE POSITION IS INDICATED IN APPROX POSITION SHOWN.

PART No.	CODE No.	B	C
BM14B(0.8)-10DS-0.4V(51)	CL684-8003-5-51	4.48	2.4
BM14B(0.8)-12DS-0.4V(51)	CL684-8041-4-51	4.88	2.8
BM14B(0.8)-20DS-0.4V(51)	CL684-8004-8-51	6.48	4.4
BM14B(0.8)-22DS-0.4V(51)	-	6.88	4.8
BM14B(0.8)-24DS-0.4V(51)	CL684-8005-0-51	7.28	5.2
BM14B(0.8)-30DS-0.4V(51)	CL684-8006-3-51	8.48	6.4
BM14B(0.8)-34DS-0.4V(51)	CL684-8007-6-51	9.28	7.2
BM14B(0.8)-40DS-0.4V(51)	CL684-8008-9-51	10.48	8.4
BM14B(0.8)-50DS-0.4V(51)	CL684-8009-1-51	12.48	10.4
BM14B(0.8)-60DS-0.4V(51)	CL684-8001-0-51	14.48	12.4

A-A (50:1)

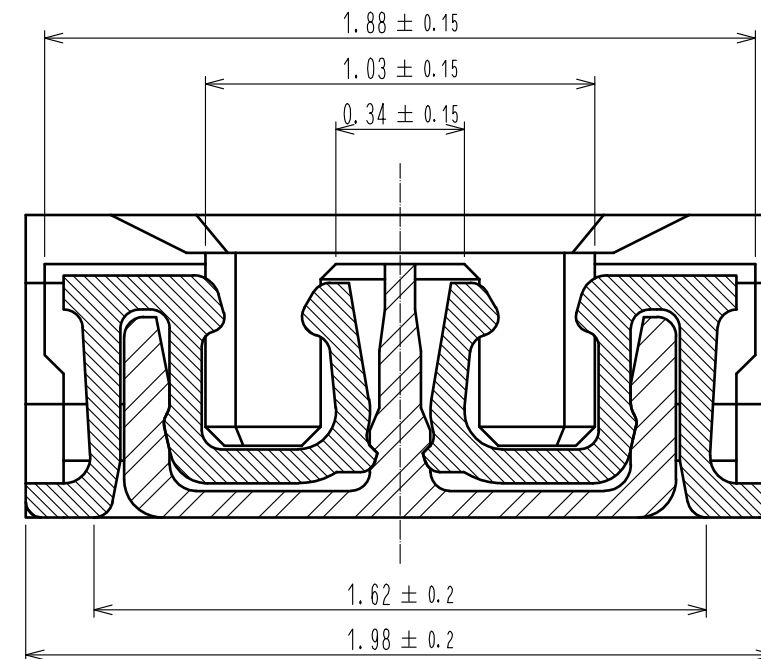

ENGAGEMENT FIGURE (50:1)

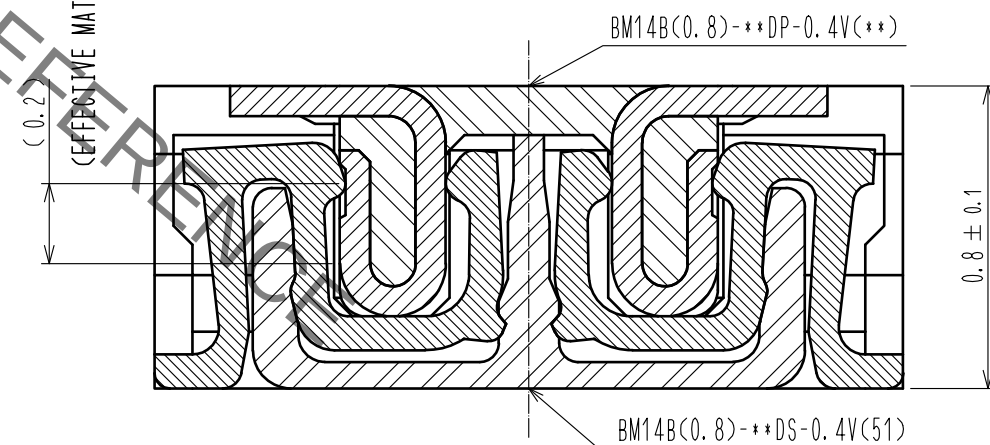

3	PS	CLEAR (ENBOSSED CARRIER TAPE)		6	PS	CLEAR (REINFORCEMENT COLLAR)	
2	PHOSPHOR BRONZE	2		5	PS	BLACK (PLASTIC REEL)	
1	LCP	UL94 V-0, BLACK		4	POLYESTER	CLEAR (COVER TAPE)	
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS	

UNITS mm		SCALE 10 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
			1	DIS-H-00003048	NY. YAMASHIRO	TS. MIYAZAKI	17. 09. 29	

	HIROSE ELECTRIC CO., LTD.	APPROVED	: KH. IKEDA	09. 11. 24	DRAWING NO.	EDC3-322327-04		
		CHECKED	: WR. FUKUCHI	09. 11. 24		PART NO.	BM14B(0.8)-*DS-0.4V(51)	
		DESIGNED	: YH. HASEGAWA	09. 11. 20	CODE NO.		CL684	
		DRAWN	: YH. HASEGAWA	09. 11. 20		7 1 3		

A



The graph shows a linear decrease in temperature over time. The y-axis is labeled 'TEMPERATURE (°C)' with major ticks at 100 and 150. The x-axis is labeled 'TIME (min)' with major ticks at 0, 5, and 10. A solid line starts at (0, 150) and ends at (10, 100).


Time (min)	Temperature (°C)
0	150
5	125
10	100

C



	2
---	---

Jul.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

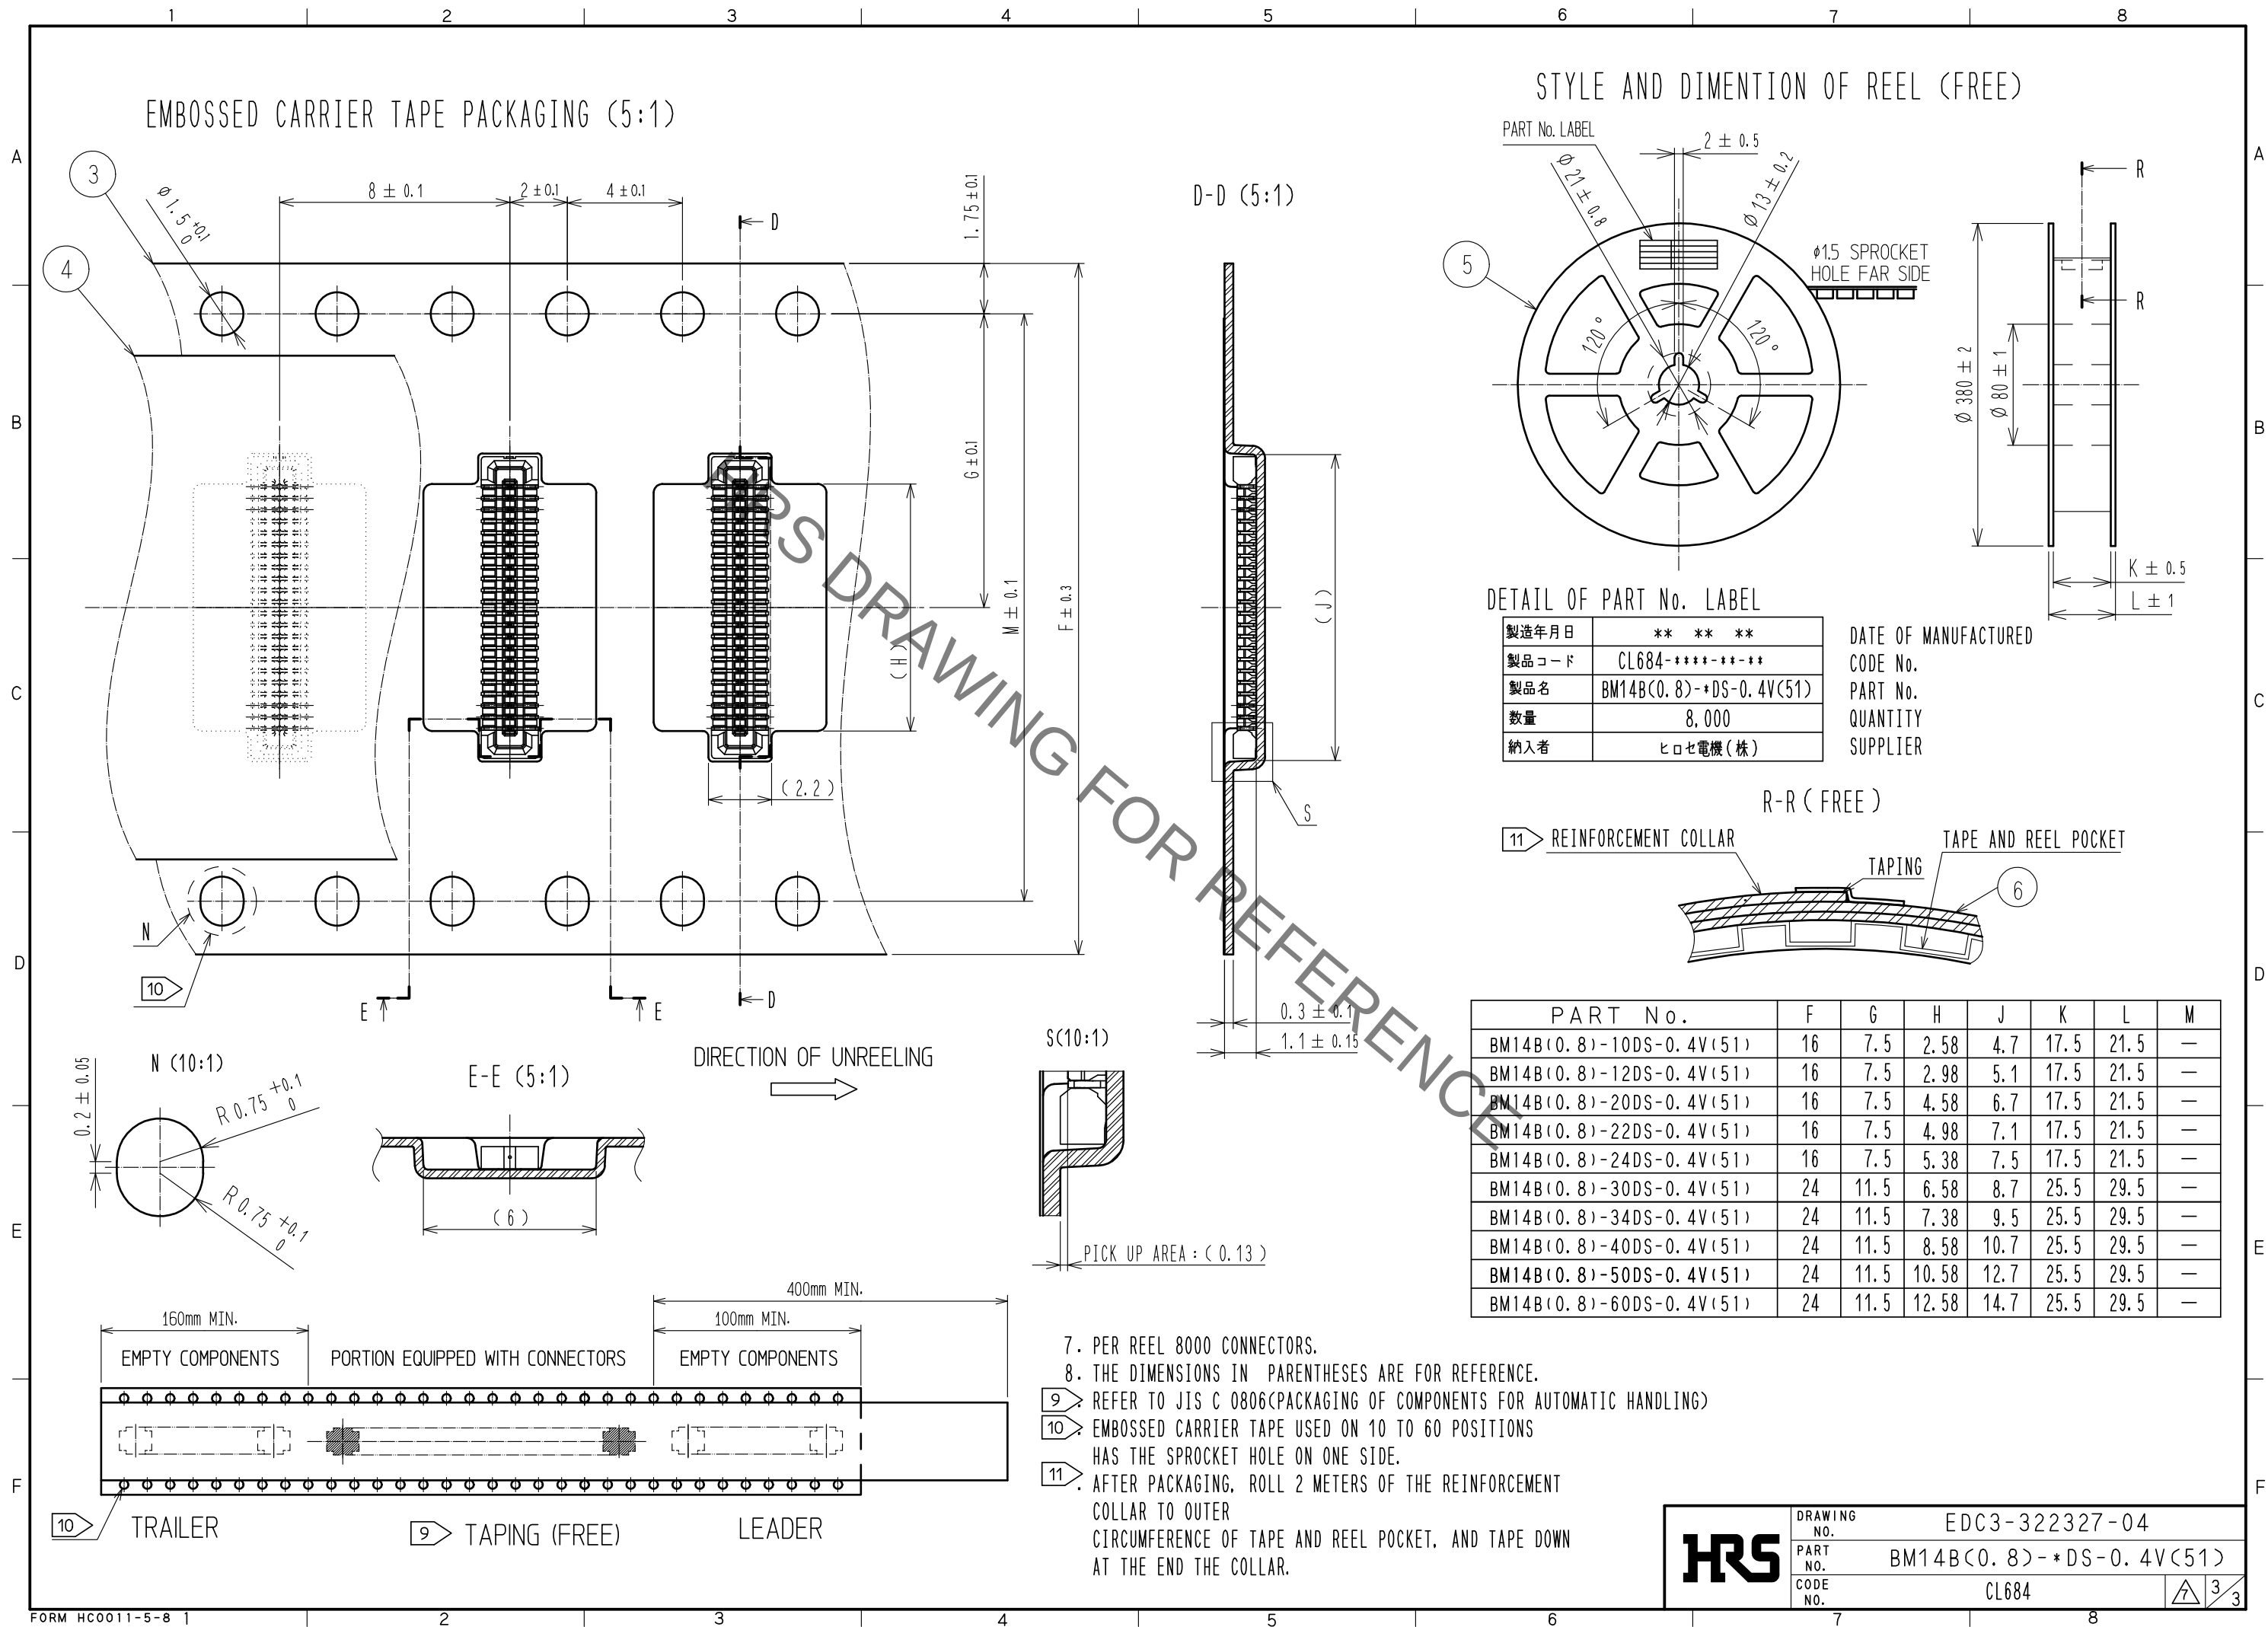

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[BM14B\(0.8\)-50DS-0.4V\(51\)](#)