
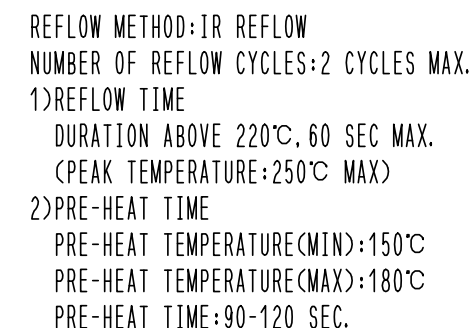






NOTE 1 . ALL LEAD CO-PLANARITY SHALL BE 0.08mm MAX.

2 → CONTACT PLATING SPECIFICATIONS
CONTACT AREA : GOLD 0.05 μ m MIN
SMT LEAD : GOLD 0.05 μ m MIN
UNDER PLATING : NICKEL 1 μ m MIN
(SURFACE : SEALING)


3 → A PART OF THE WALL COULD BE NOTCHED.

4 → HRS MARK AND CAV No. ARE INDICATED IN APPROX. POSITION SHOWN.

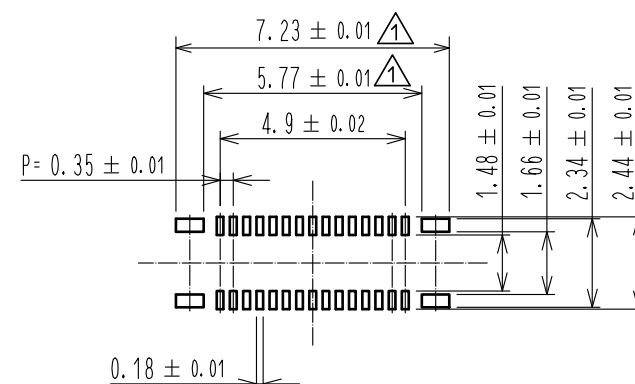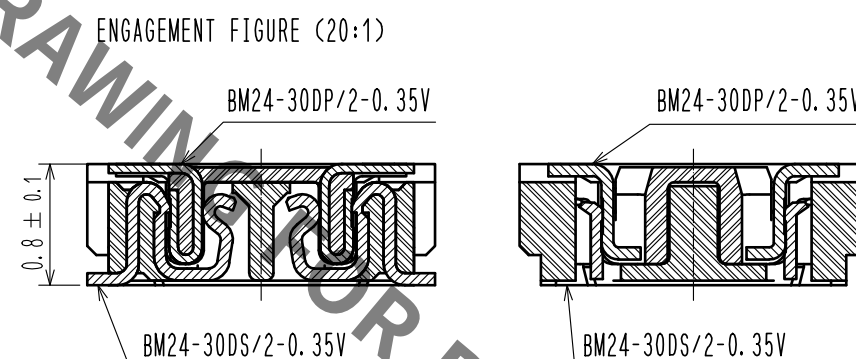


**HIROSE
ELECTRIC
CO., LTD.**


EMBOSSED CARRIER TAPE PACKAGING (FREE)

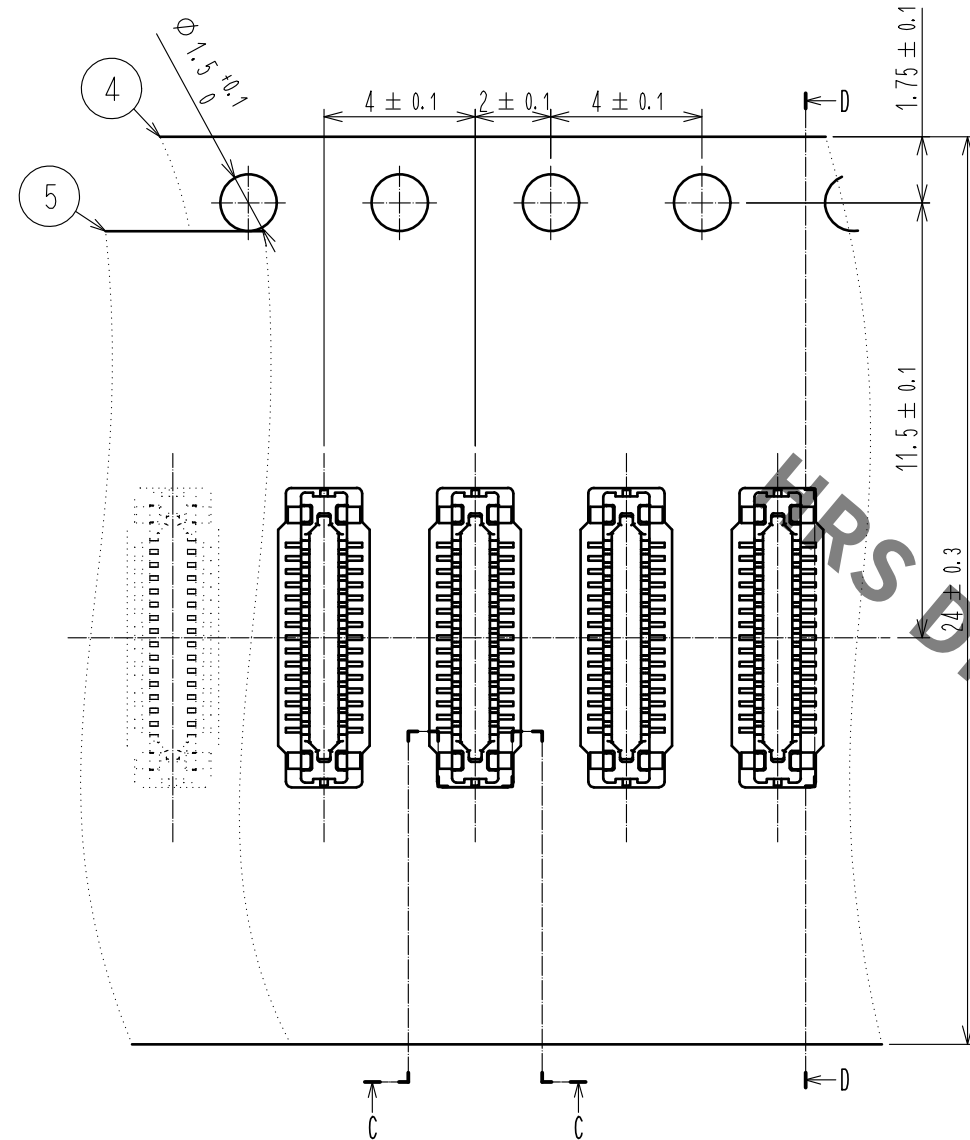



D-D(5:1)

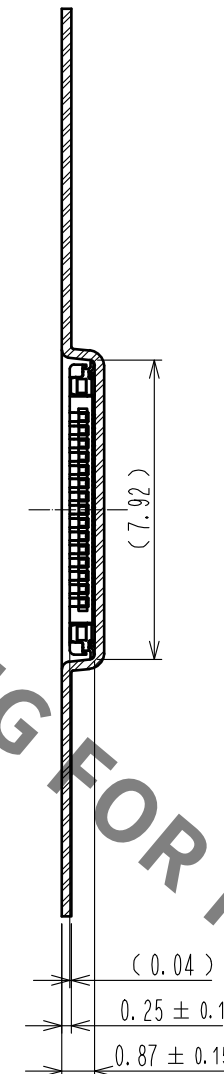

C-C (5:1)



DIRECTION OF UNREELING

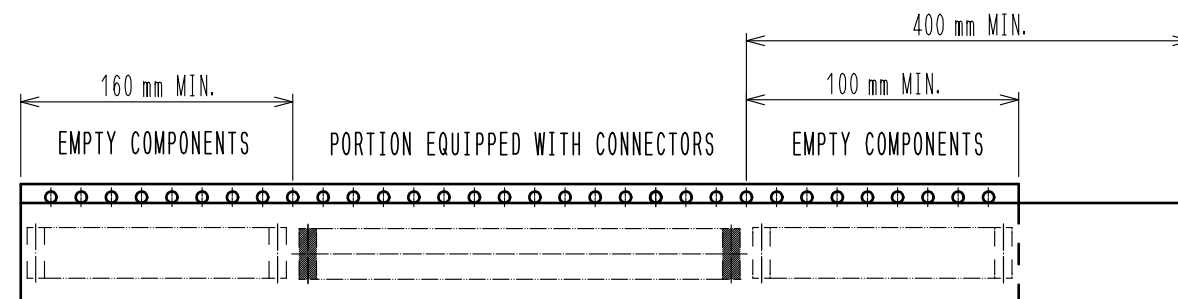


TRAILER


9 TAPING(FREE)

LEADER

STYLE AND DIMENTION OF REEL (FREE)

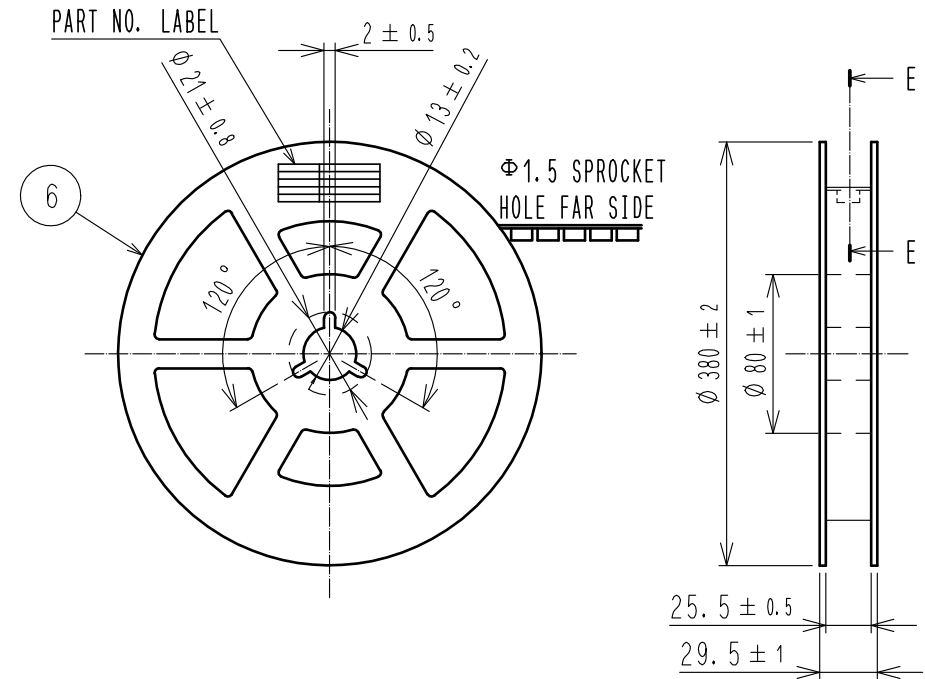

E-E (FREE)

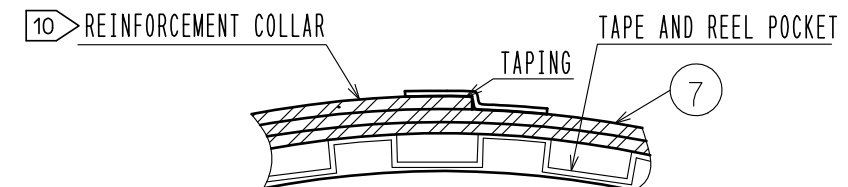

DETAIL OF PART NO. LABEL

製造年月日	** ** *
製品コード	CL0677-2007-5(51)
製品名	BM24-30DP/2-0.35V(51)
数量	10,000
納入者	ヒロセ電機(株)

DATA OF MANUFACTURED
CODE NO.
PART NO.
QUANTITY
SUPPLIER

- 7 . PER REEL 10,000 CONNECTORS.
- 8 . THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
- 9 . REFER TO JIS C 0806(PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING)
- 10 . AFTER PACKAGING. ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET. AND TAPE DOWN AT THE END THE COLLAR.

HRS

DRAWING NO.	EDC3-356935-02
PART NO.	BM24-30DP/2-0.35V(51)
CODE NO.	CL677-2007-5-51

1/2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[BM24-30DP/2-0.35V\(51\)](#)