



Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

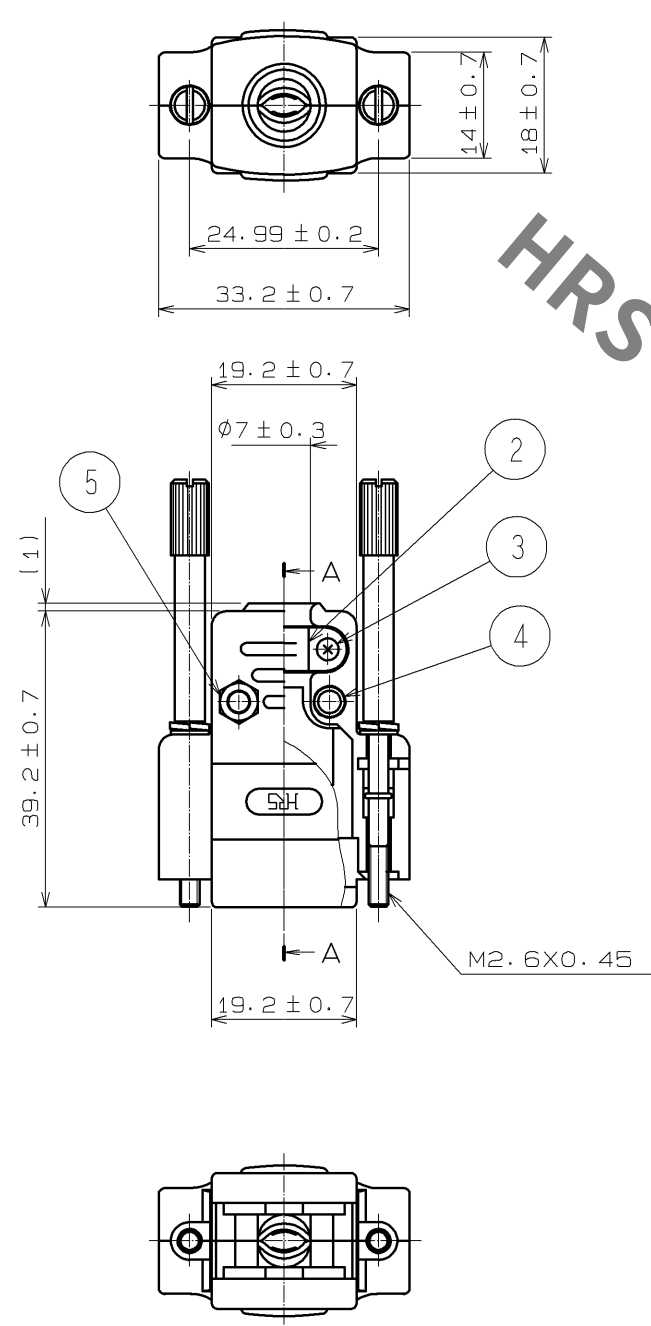

CONNECTOR APPLICATED SECTIONAL VIEW(SECTION AA)
FDE-15P NOT STRAIN-RELIEF(SCALE:FREE)

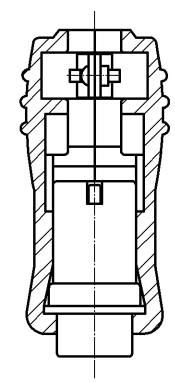

3	STEEL	OVER: Ni 0.8μm min UNDER: Cu 2μm min	6	STEEL	OVER: Ni 0.8μm min UNDER: Cu 2μm min
2	STEEL	OVER: Ni 3μm min UNDER: Cu 2μm min	5	STEEL	OVER: Ni 0.8μm min UNDER: Cu 2μm min
1	ABS	(2.5PB6.0/2.0)UL94HB	4	STEEL	OVER: Ni 0.8μm min UNDER: Cu 2μm min
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
		APPROVED : SR. KIKUTA	07. 11. 20	DRAWING NO.	EDC3-008909-01
HIROSE ELECTRIC CO., LTD.		CHECED : YH. ENAMI	07. 11. 20	PART NO.	HDE-CTF1(50)
		DESIGNED : MT. ITANO	07. 11. 20	CODE NO.	CL211-0168-9-50
		DRAWN : MT. ITANO	07. 11. 20		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[HDE-CTF1\(50\)](#)