

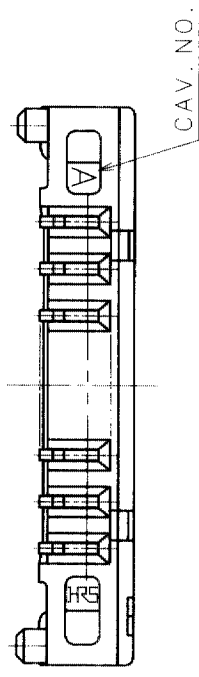
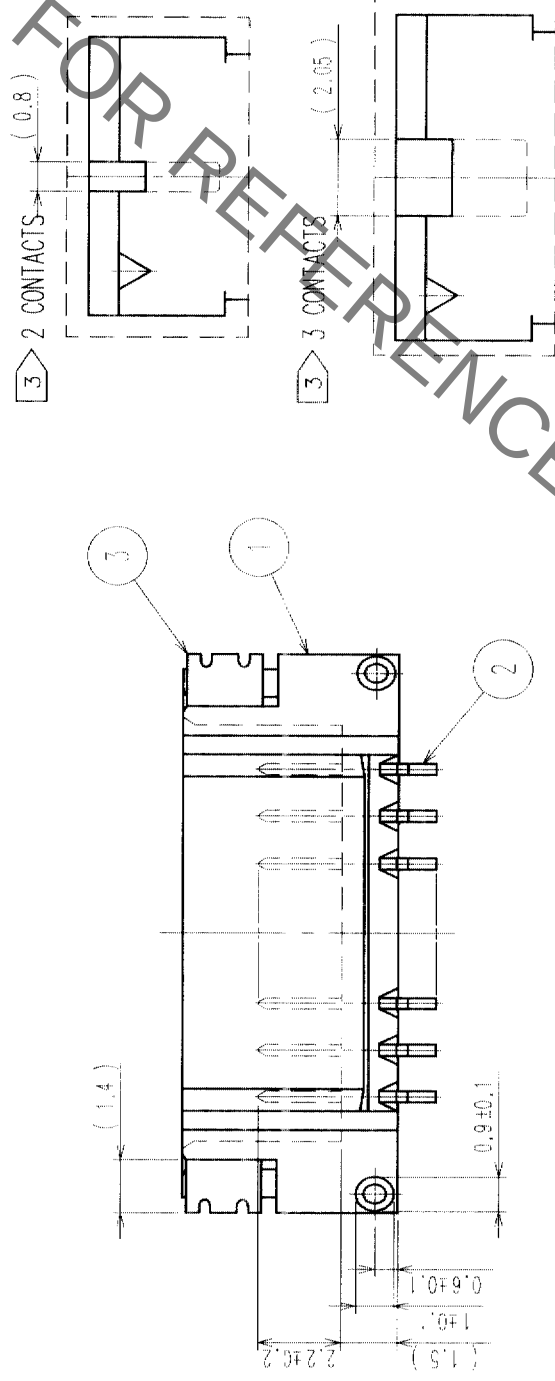
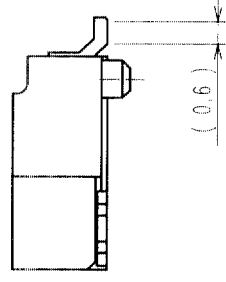
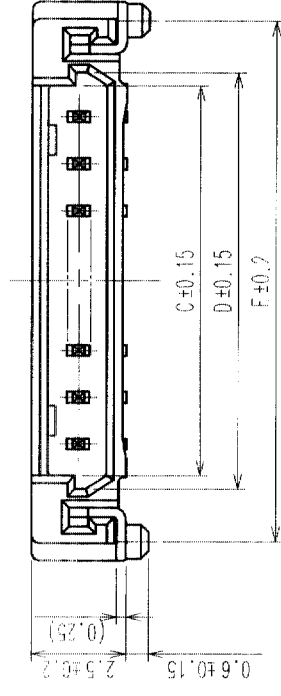
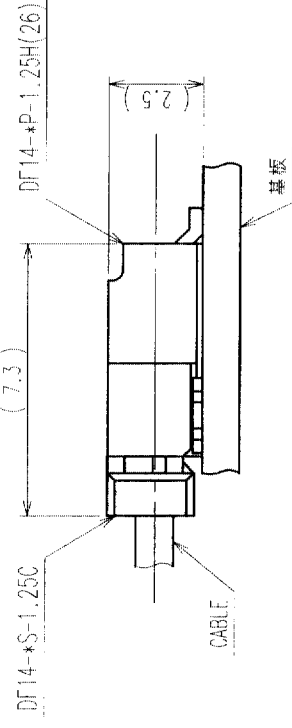


COUNT		DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△						△				
△						△				
△						△				

PART NO.	HRS NO.	CONTACTS	A	B	C	D	E	F
DF14-2P-1.25H(26)	CL538-0021-4-26	2	7.45	1.25	2.95	3.65	6.45	8.05
DF14-3P-1.25H(26)	CL538-0022-7-26	3	8.70	2.50	4.20	4.90	7.70	9.30
DF14-4P-1.25H(26)	CL538-0023-0-26	4	9.95	3.75	5.45	6.15	8.95	10.55
DF14-5P-1.25H(26)	CL538-0024-2-26	5	11.20	5.00	6.70	7.40	10.20	11.80
DF14-6P-1.25H(26)	CL538-0025-5-26	6	12.45	6.25	7.95	8.65	11.45	13.05
DF14-7P-1.25H(26)	CL538-0026-8-26	7	13.70	7.50	9.20	9.90	12.70	14.30
DF14-8P-1.25H(26)	CL538-0027-0-26	8	14.95	8.75	10.45	11.15	13.95	15.55
DF14-9P-1.25H(26)	CL538-0028-3-26	9	16.20	10.00	11.70	12.40	15.20	16.80
DF14-10P-1.25H(26)	CL538-0029-6-26	10	17.45	11.25	12.95	13.65	16.45	18.05
DF14-15P-1.25H(26)	CL538-0084-4-26	15	23.70	17.50	19.20	19.90	22.70	24.30
DF14-20P-1.25H(26)	CL538-0089-8-26	20	29.95	23.75	25.45	26.15	28.95	30.55
DF14-25P-1.25H(26)	CL538-0094-8-26	25	36.20	30.00	31.70	32.40	35.20	36.80
DF14-30P-1.25H(26)	CL538-0020-1-26	30	42.45	36.25	37.95	38.65	41.45	43.05



RECOMMENDED PATTERN

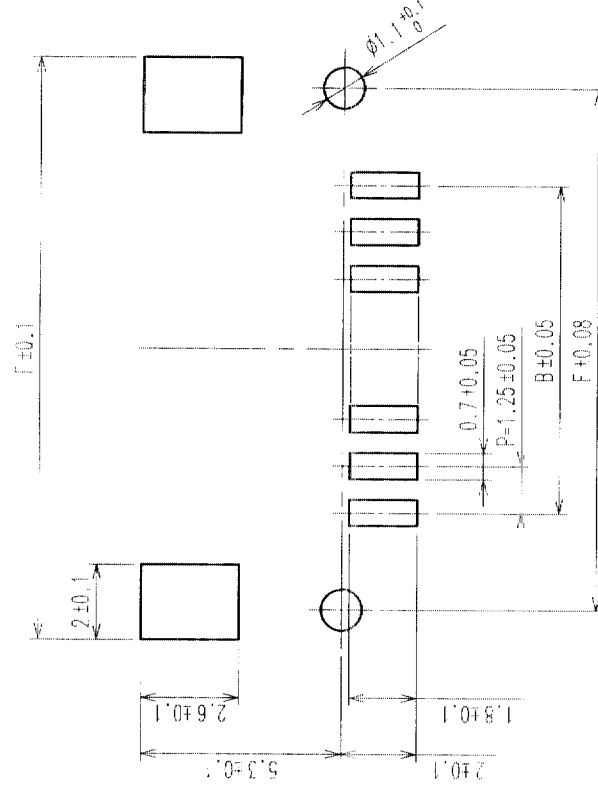




NOTE 1. LEAD CO-PLANALITY INCLUDE REINFORCED METAL FITTING SHALL BE 0.1 MAX.
 2 WHEN THIS CONNECTOR MATES WITH DF14-S-1.25C, THE MATTING LENGTH IS 7.3mm.
 3 FOR CONNECTORS, 2 OR 3 CONTACTS, SIMPLIFIED LOCK HOLE SHALL BE SET AT THE CENTER OF HOUSING.

3	PHOSPHOR BRONZE	TIN-COPPER PLATED 1 μ m min UNDER PLATING-NICKEL PLATED 0.5 μ m min
2	BRASS	TIN-COPPER PLATED 1 μ m min UNDER PLATING-NICKEL PLATED 0.5 μ m min
1	POLYAMIDE	BEIGE, UL 94V-0

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)		CL	DRAWN	DESIGNED	CHECKED
DRAWING NO.					
EDC3-160307-19					
SCALE			PART NO.		
5 : 1			DF14-*P-1.25H(26)		
UNITS			CODE NO.		
mm			HIROSE ELECTRIC CO., LTD		
			CL538-		1/2

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

PART NO.	CONTACTS	G	H	J	K	M
DF14- 2P-1.25H(26)	2	7.5	-	16	7.85	16.4
DF14- 3P-1.25H(26)	3	7.5	-	16	9.1	16.4
DF14- 4P-1.25H(26)	4	11.5	-	24	10.35	24.4
DF14- 5P-1.25H(26)	5	11.5	-	24	11.6	24.4
DF14- 6P-1.25H(26)	6	11.5	-	24	12.85	24.4
DF14- 7P-1.25H(26)	7	11.5	-	24	14.1	24.4
DF14- 8P-1.25H(26)	8	11.5	-	24	15.35	24.4
DF14- 9P-1.25H(26)	9	11.5	-	24	16.6	24.4
DF14-10P-1.25H(26)	10	11.5	-	24	17.85	24.4
DF14-15P-1.25H(26)	15	20.2	40.4	44	24.1	44.4
DF14-20P-1.25H(26)	20	20.2	40.4	44	30.35	44.4
DF14-25P-1.25H(26)	25	26.2	52.4	56	36.6	56.4
DF14-30P-1.25H(26)	30	26.2	52.4	56	42.85	56.4

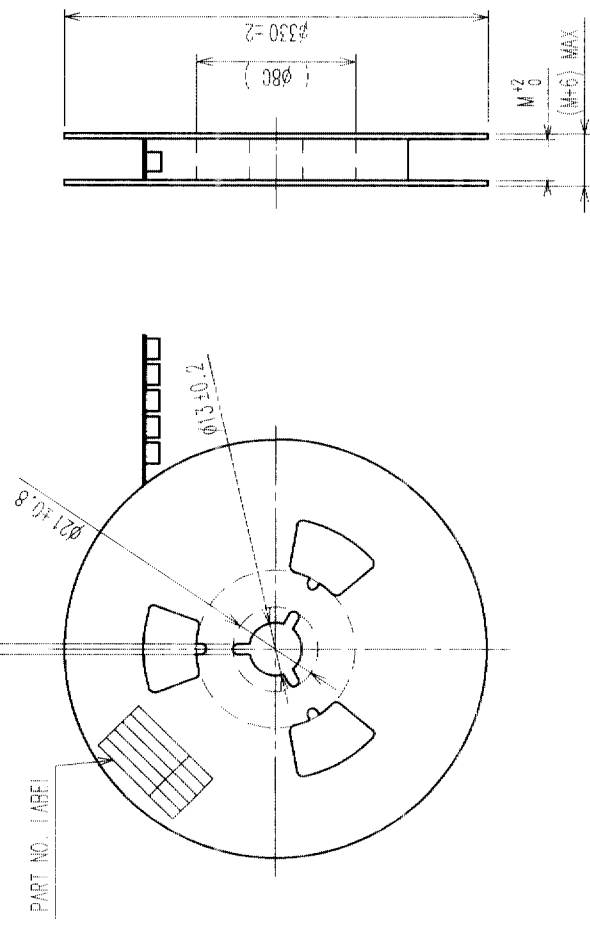

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)		CL	DRAWN	DESIGNED	CHECKED
			03.3.5	03.3.7	03.03.25
DRAWING NO.		EDC3-160307-19	PART NO. DF14-*P-1.25H(26)		
SCALE	FREE				
UNITS	mm	CODE NO.		CL538-	
		HIROSE ELECTRIC CO., LTD		2	

生産月日	年 月 日
CLコード	538-*****-26
品名	DF14-*P-1.25H(26)
納入数量	1000個
納入者	ヒロセ電機株式会社

NOTES 4 1 REEL : 1000 CONNECTORS.

5 AT THE BEGINNING OF THE REEL, 30 COMPONENTS SHALL BE EMPTY.

6 > AT THE END OF THE REEL : 20 COMPONENTS SHALL BE EMPTY.

WHEN THE TAPE WIDTH IS 44 TO 56mm. SPROCKET HOLES SHALL

BE SET ON BOTH SIDES OF REEL AS SHOWN ON THIS DRAWING.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DF14-30P-1.25H\(26\)](#)