
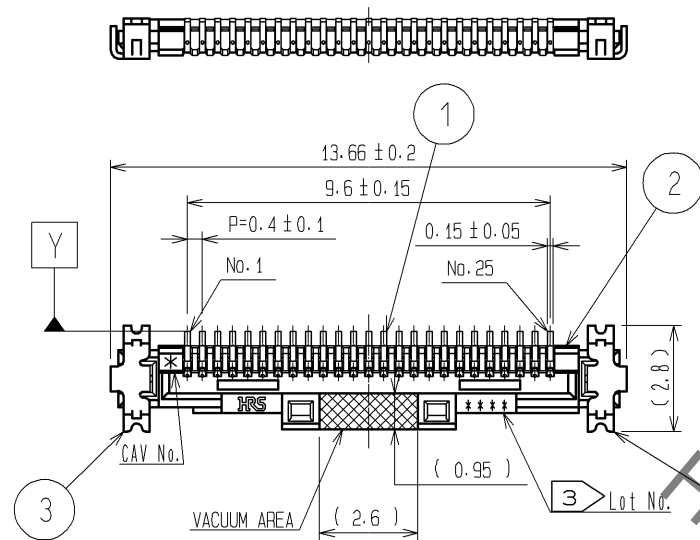
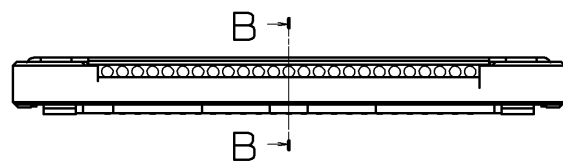


MATING FIGURE

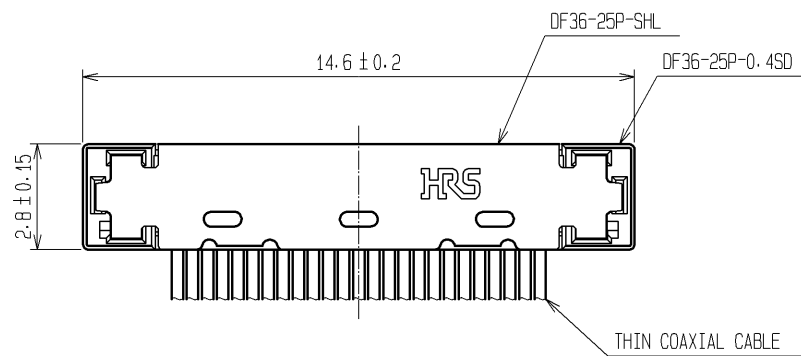


NOTES

1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. STIFFENER IS REQUIRED FOR MOUNTING ONTO FPC IN ORDER TO AVOID STRESS BY FPC SLACKING TO MOUNTED CONNECTOR.
3. LOT No. INFORMATION IS SHOWN IN THE TABLE.
EXAMPLE: 96FD
→YEAR:2009 MONTH:July DAY:15 LINE No.:4
4. UNMATING SHALL BE DONE WITH THE SPECIFIC EXTRACTION TOOL.

YEAR		MONTH		DAY						LINE No.	
YEAR	CODE	MONTH	CODE	DAY	CODE	DAY	CODE	DAY	CODE	LINE No.	CODE
10	0	Jan	A	1	1	11	B	21	M	1	A
11	1	Feb	B	2	2	12	C	22	N	2	B
12	2	Mar	C	3	3	13	D	23	P	3	C
13	3	Apr	D	4	4	14	E	24	Q	4	D
14	4	May	E	5	5	15	F	25	R	5	E
15	5	Jun	F	6	6	16	G	26	S	6	F
16	6	Jul	G	7	7	17	H	27	T	7	G
17	7	Aug	H	8	8	18	J	28	U	8	H
18	8	Sep	I	9	9	19	K	29	V	9	I
09	9	Oct	J	10	A	20	L	30	W	10	J
		Nov	K					31	X		
		Dec	L								

3	PHOSPHOR BRONZE	WHOLE AREA : Gold PLATING 0.1μm min UNDER PLATING : Nickel PLATING 2μm min	7	PS	BLACK
2	LCP	UL94V-0 , BLACK	6	POLYESTER	CLEAR
1	PHOSPHOR BRONZE	CONTACT AREA : Gold PLATING 0.3μm min LEAD AREA : Gold PLATING 0.1μm min UNDER PLATING : Nickel PLATING 2μm min	5	PS	CLEAR
4	PHOSPHOR BRONZE	WHOLE AREA : Gold PLATING 0.1μm min UNDER PLATING : Nickel PLATING 2μm min	4	PHOSPHOR BRONZE	WHOLE AREA : Gold PLATING 0.1μm min UNDER PLATING : Nickel PLATING 2μm min
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : KH. IKEDA	14. 11. 06	DRAWING NO.	EDC3-312852-03			
		CHECED : MH. TSUCHIDA	14. 11. 06	PART NO.	DF36-25S-0. 4V(55)			
		DESIGNED : IO. DENPOUYA	14. 11. 06	CODE NO.	CL662-4005-1-55			
		DRAWN : YJ. HAGA	14. 10. 23	 1/2				



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DF36-25S-0.4V\(55\)](#)