

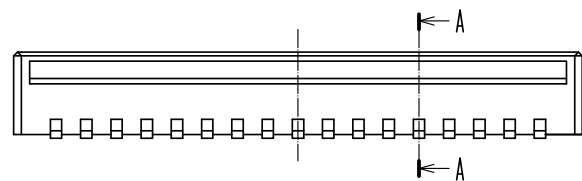



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

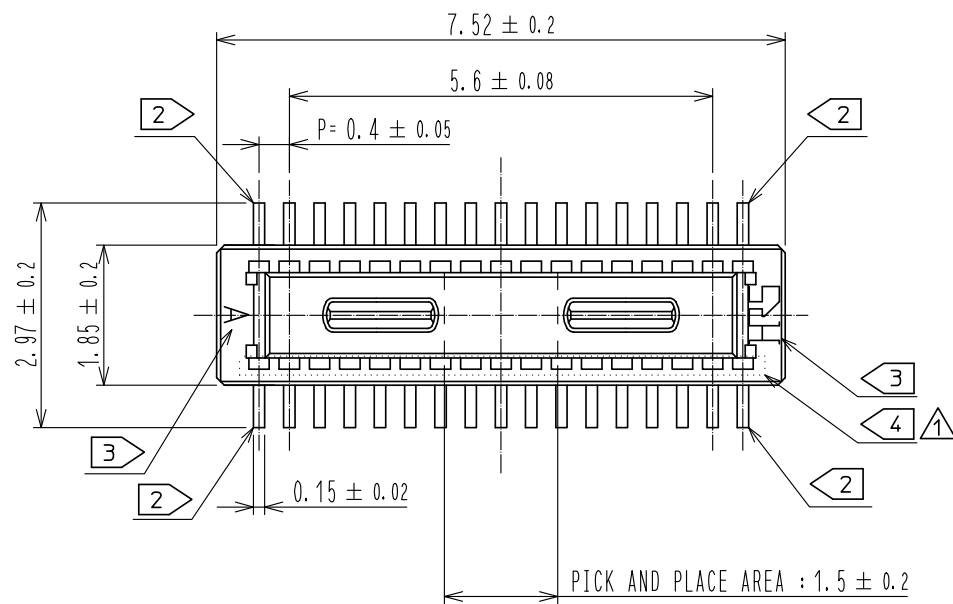

HRS DRAWING FOR REFERENCE

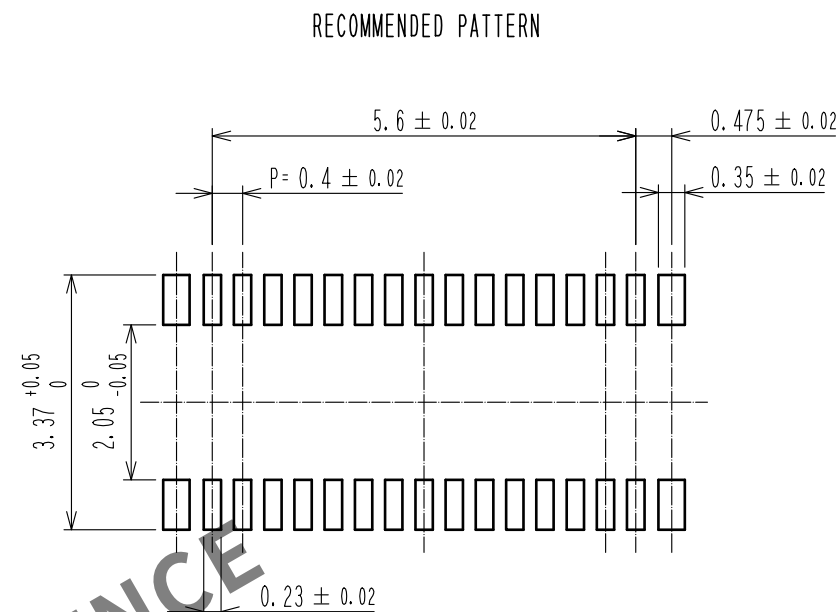


RECOMMENDED METAL MASK THICKNESS: $120 \mu\text{m}$
RECOMMENDED METAL MASK OPENING RATIO: 80% FOR LEAD PAD

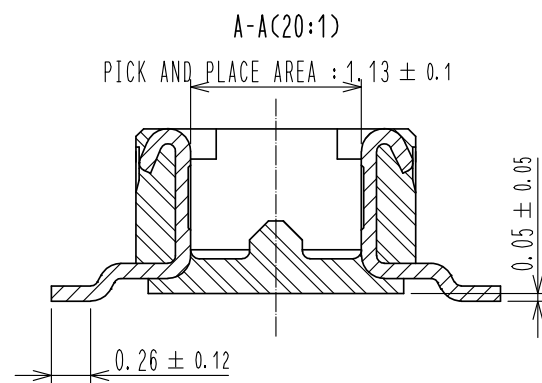


- NOTES) 1. ALL LEADS CO-PLANARITY SHALL BE 0.1mm MAX.
2 EACH ONE CONTACT AT 4 CORNERS SHALL BE USED AS METAL HOLD DOWN.
3 HRS MARK AND CAV NO. ARE LOCATED IN APPROXIMAL AREA.
4 THERE IS A POSSIBILITY THAT THE RESIN WILL BE EXPOSED AT THIS AREA. BUT THIS WILL NOT AFFECT THE CONTACT RELIABILITY.

2	COPPER ALLOY	CONTACT AREA:GOLD 0.05μm MIN	6	PS	CLEAR, REINFORCEMENT COLLAR
		SMT LEAD:GOLD 0.05μm MIN	5	PS	BLACK
		UNDERPLATING:NICKEL 1μm MIN	4	POLYESTER	CLEAR, COVER TAPE
1	LCP	BLACK, UL94V-0	3	PS	CLEAR, EMBOSSED CARRIER TAPE
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 10 : 1		COUNT 3	DESCRIPTION OF REVISIONS DIS-H-00005459	DESIGNED YK. SATAKE	CHECKED TS. MIYAZAKI	DATE 20191106
 HIROSE ELECTRIC CO., LTD.		APPROVED :WR. FUKUCHI		20190508	DRAWING NO. EDC-386694-51-00			
		CHECED :TS. MIYAZAKI		20190508	PART NO. DF40TC-30DP-0.4V(51)			
		DESIGNED :SJ. WADA		20190508	CODE NO. CL684-4263-0-51			
		DRAWN :RH. KAGAMI		20190508	 			

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

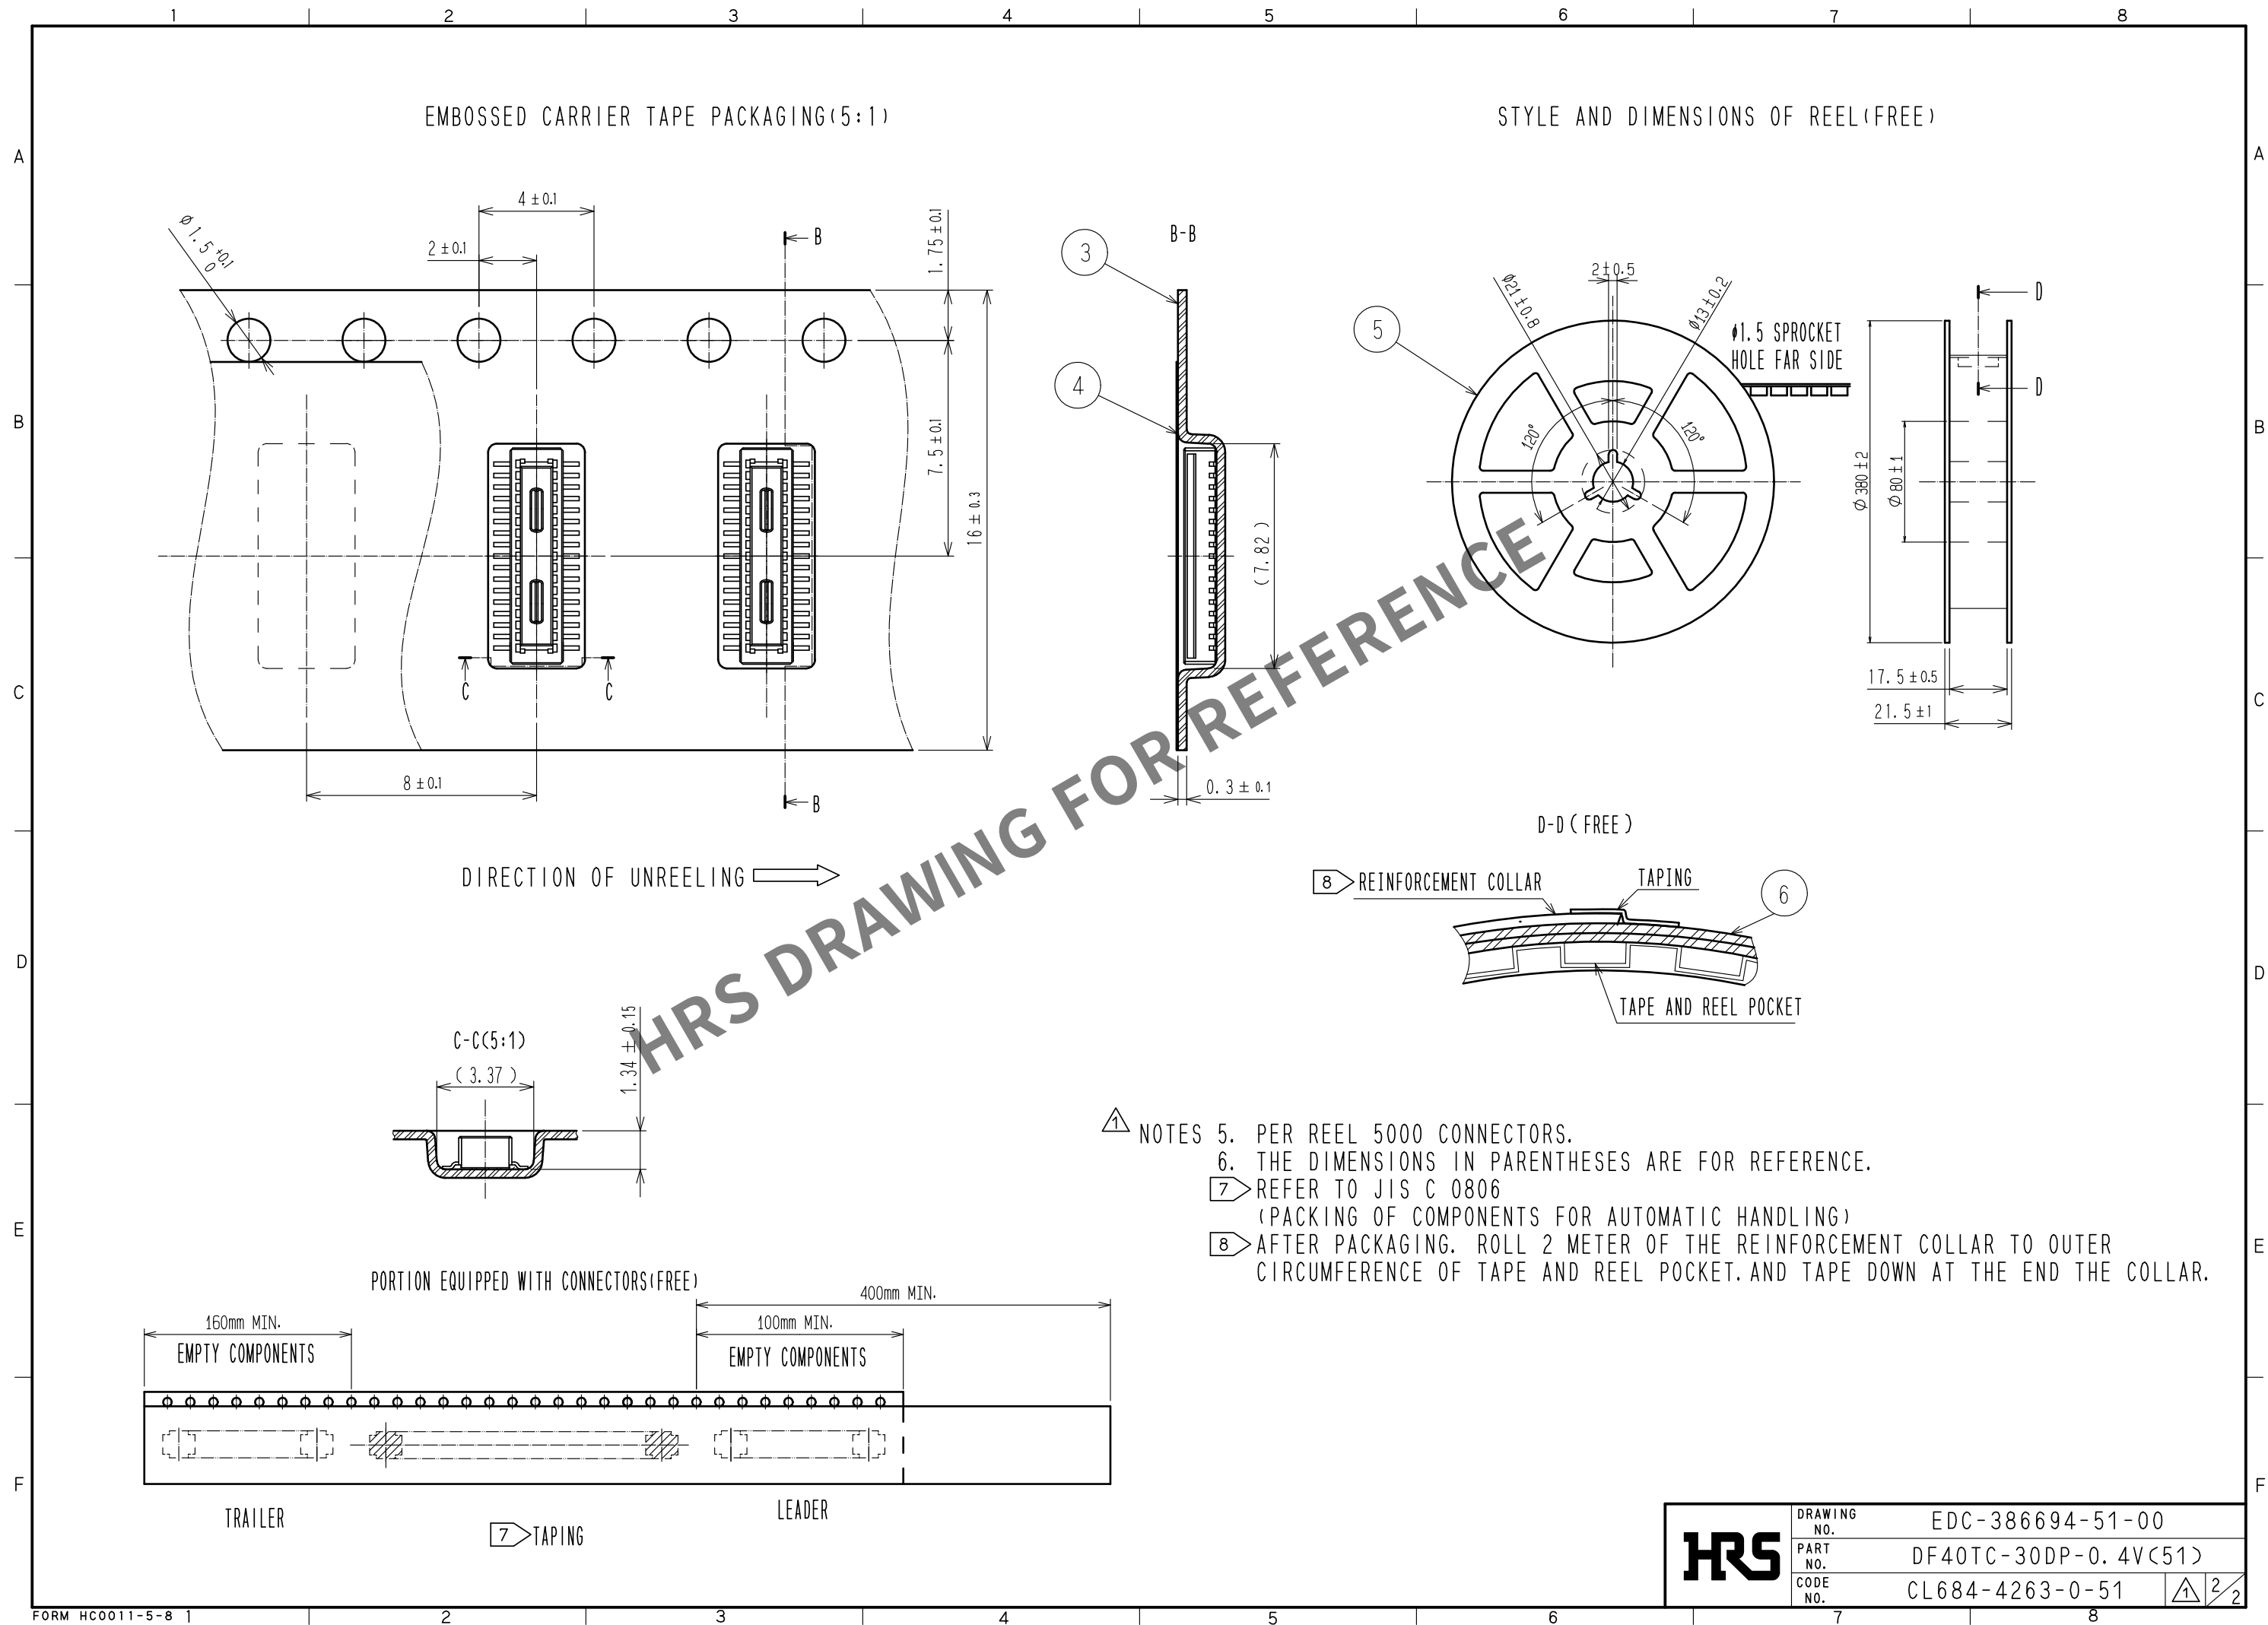

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DF40TC-30DP-0.4V\(51\)](#)