



2  IS NO PATTERN AREA OTHER THAN THE SAME CIRCUIT.

3 HRS MARK AND CAV NO. IS INDICATED IN APPROXI POSITION SHOWN.


4 GATE POSITION IS POSITIONED IN APPROXIMAL AREA SHOWN.

 HIROSE ELECTRIC CO., LTD.	APPROVED	・WR. FUKUCHI	20200115	DRAWING NO.	EDC-389547-51-00	
	CHECKED	・TS. MIYAZAKI	20200115	PART NO.	DF40TC(2.5)-50DS-0.4V(51)	
	DESIGNED	・YK. SATAKE	20200115	CODE NO.	CL684-4279-0-51	 
	DRAWN	・YK. SATAKE	20200115			


Aug.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

EMBOSSED CARRIER TAPE PACKAGING (5:1)



STYLE AND DIMENSION OF REEL (FREE)

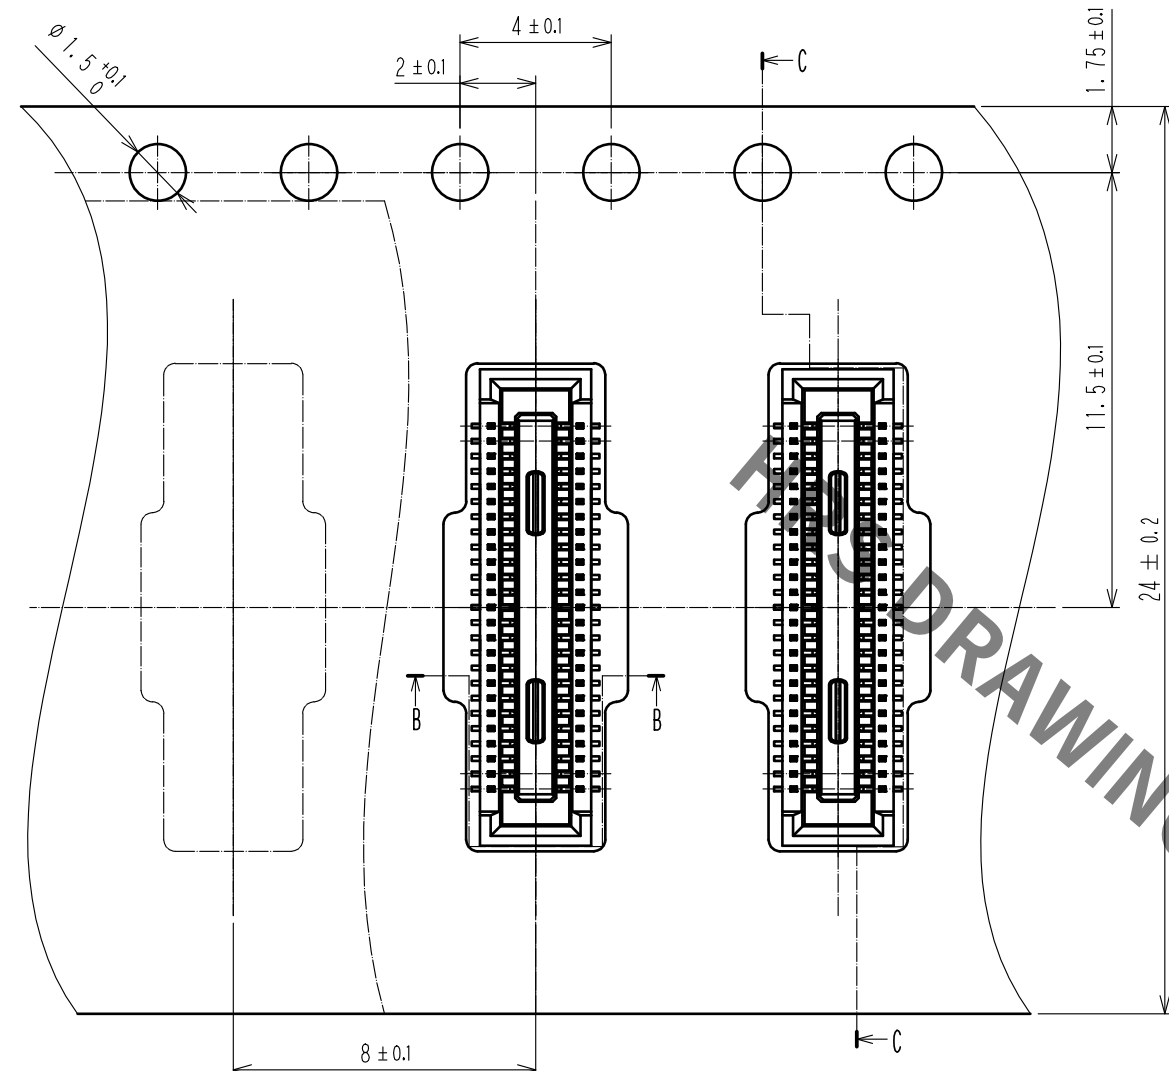

C-C(5:1)

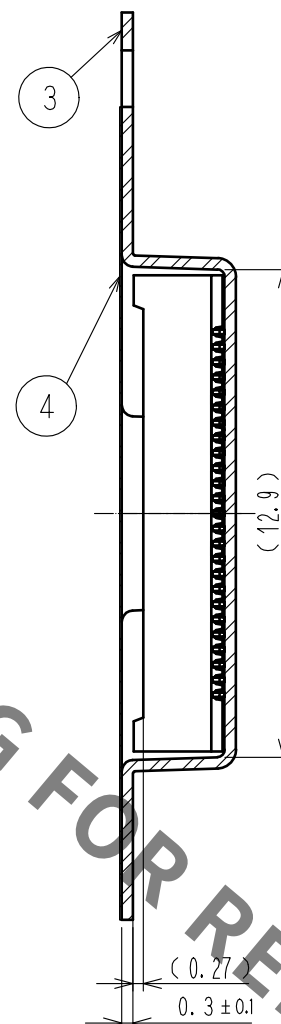


DIRECTION OF UNREELING →

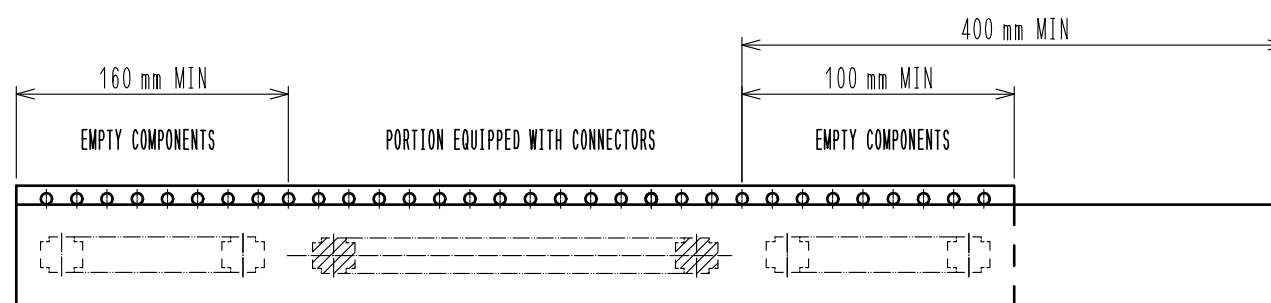


TRAILER

7 TAPING

LEADER

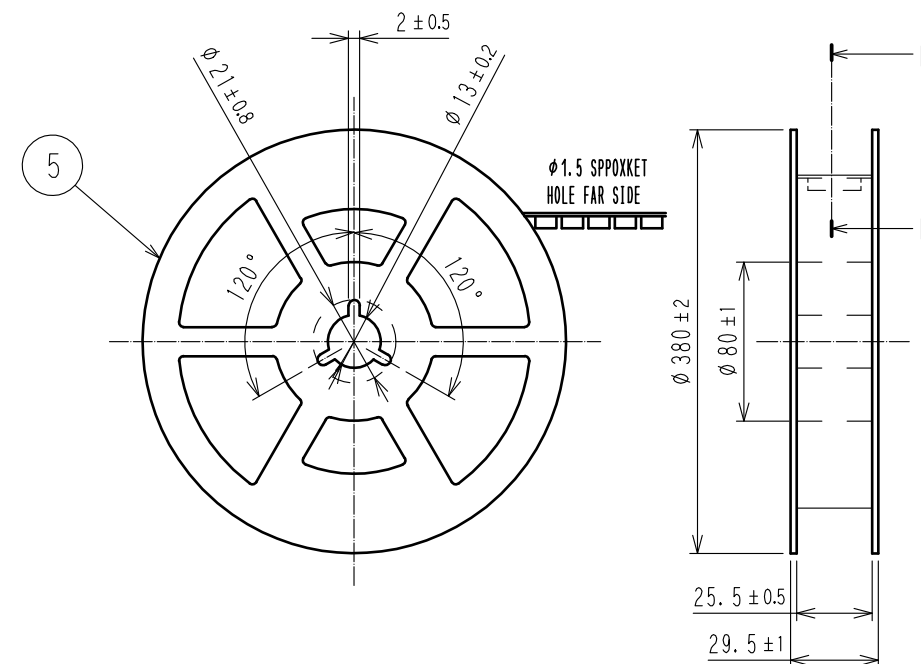

D-D(FREE)

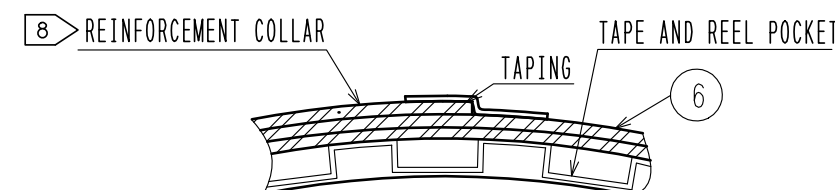

- NOTES)
- PER REEL 3000 CONNECTORS.
 - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - REFER TO JIS C 0806(PACKING OF COMPONENTS FOR AUTOMATIC HANDLING)
 - AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET, AND TAPE DOWN AT THE END THE COLLAR.

HRS

DRAWING NO.	EDC-389547-51-00
PART NO.	DF40TC(2.5)-50DS-0.4V(51)
CODE NO.	CL684-4279-0-51

2/2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DF40TC\(2.5\)-50DS-0.4V\(51\)](#)