

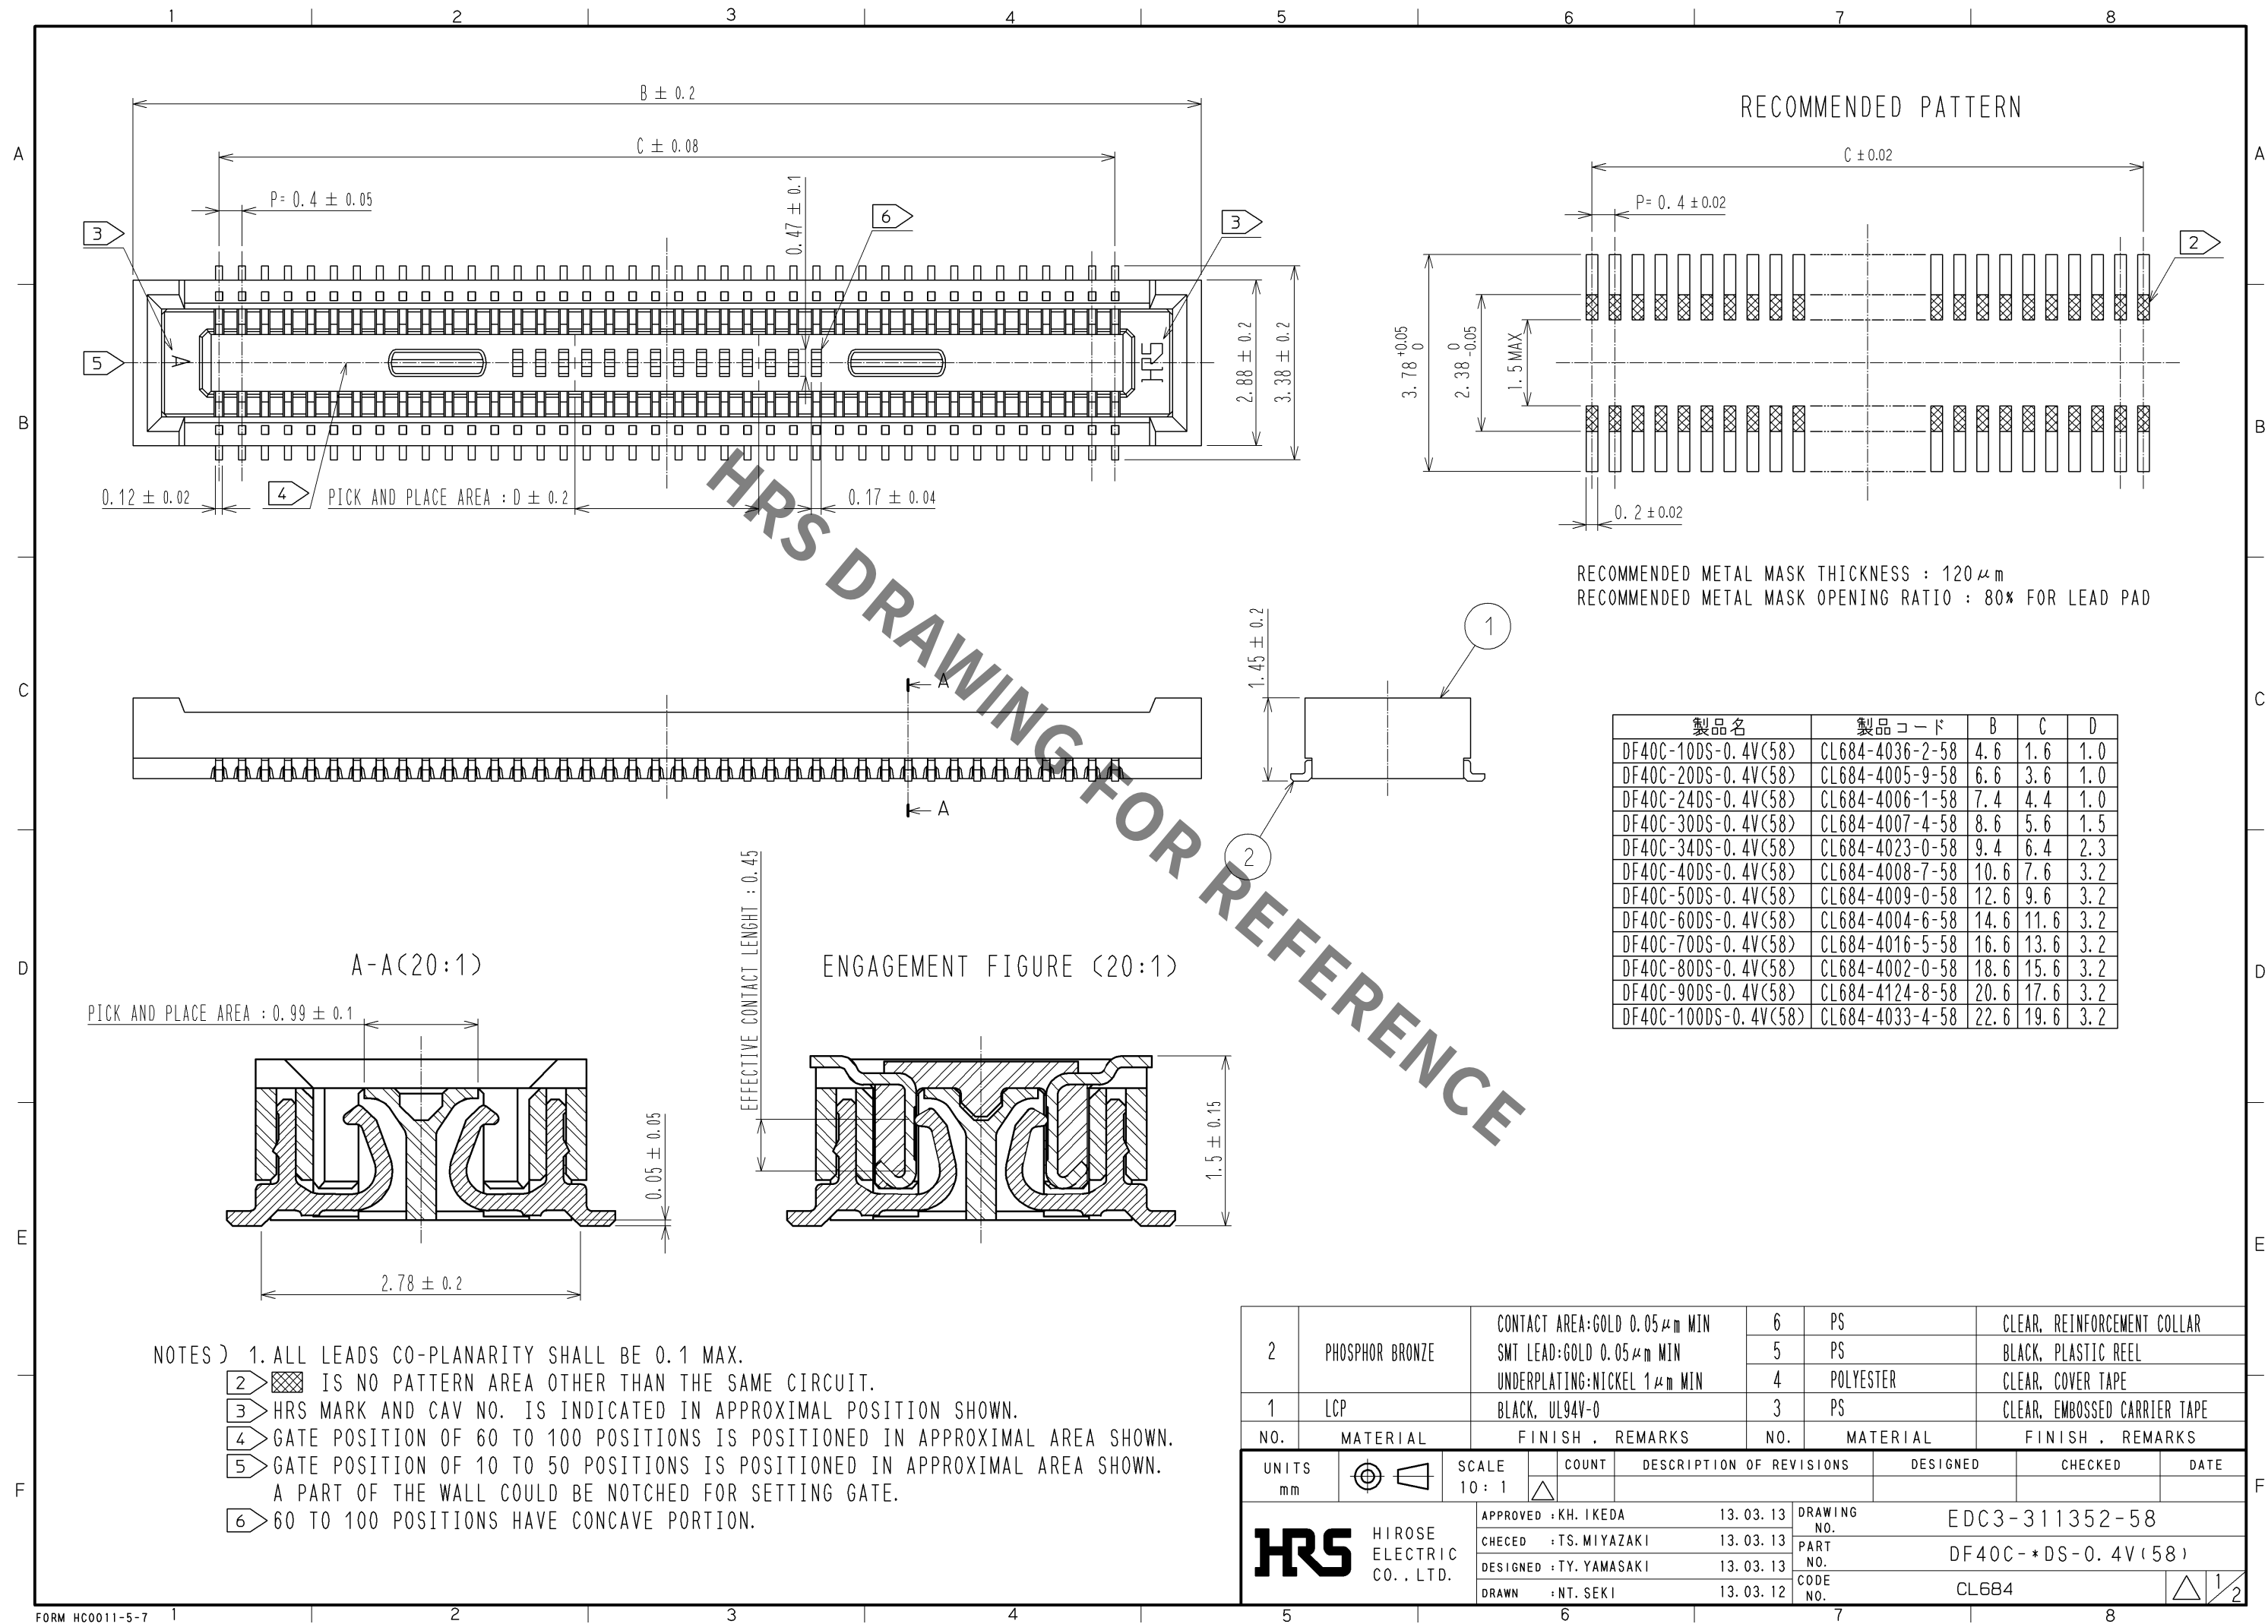


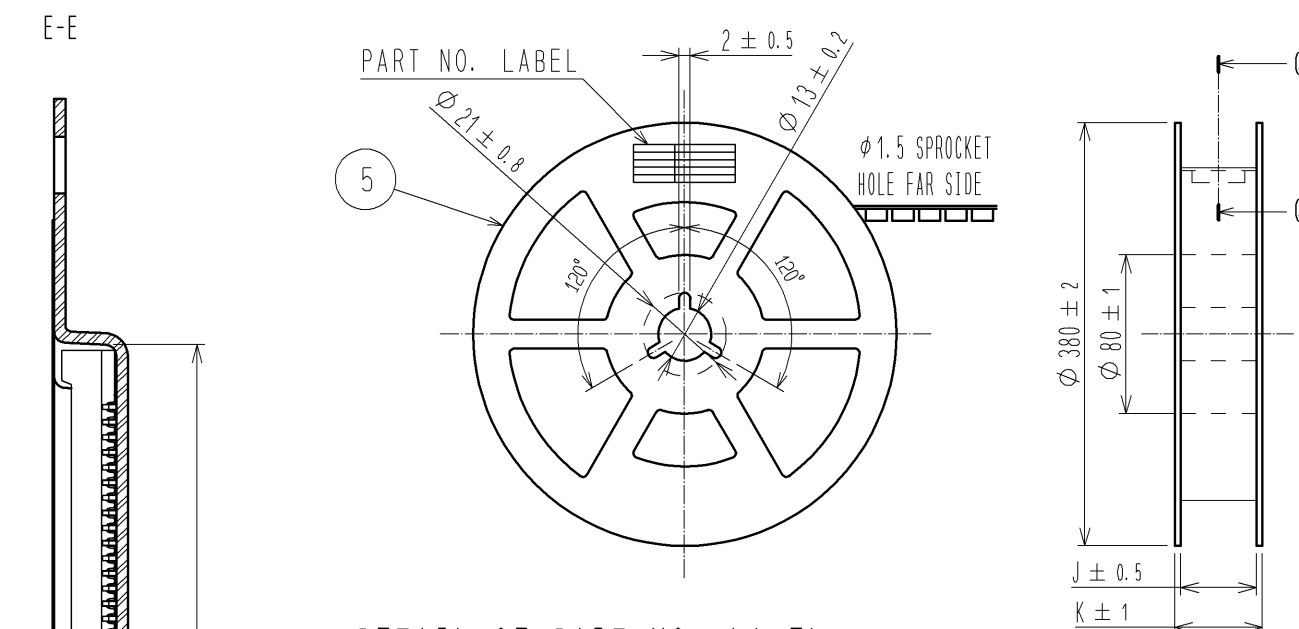


STYLE AND DIMENSION OF REEL(FREE SIZE)

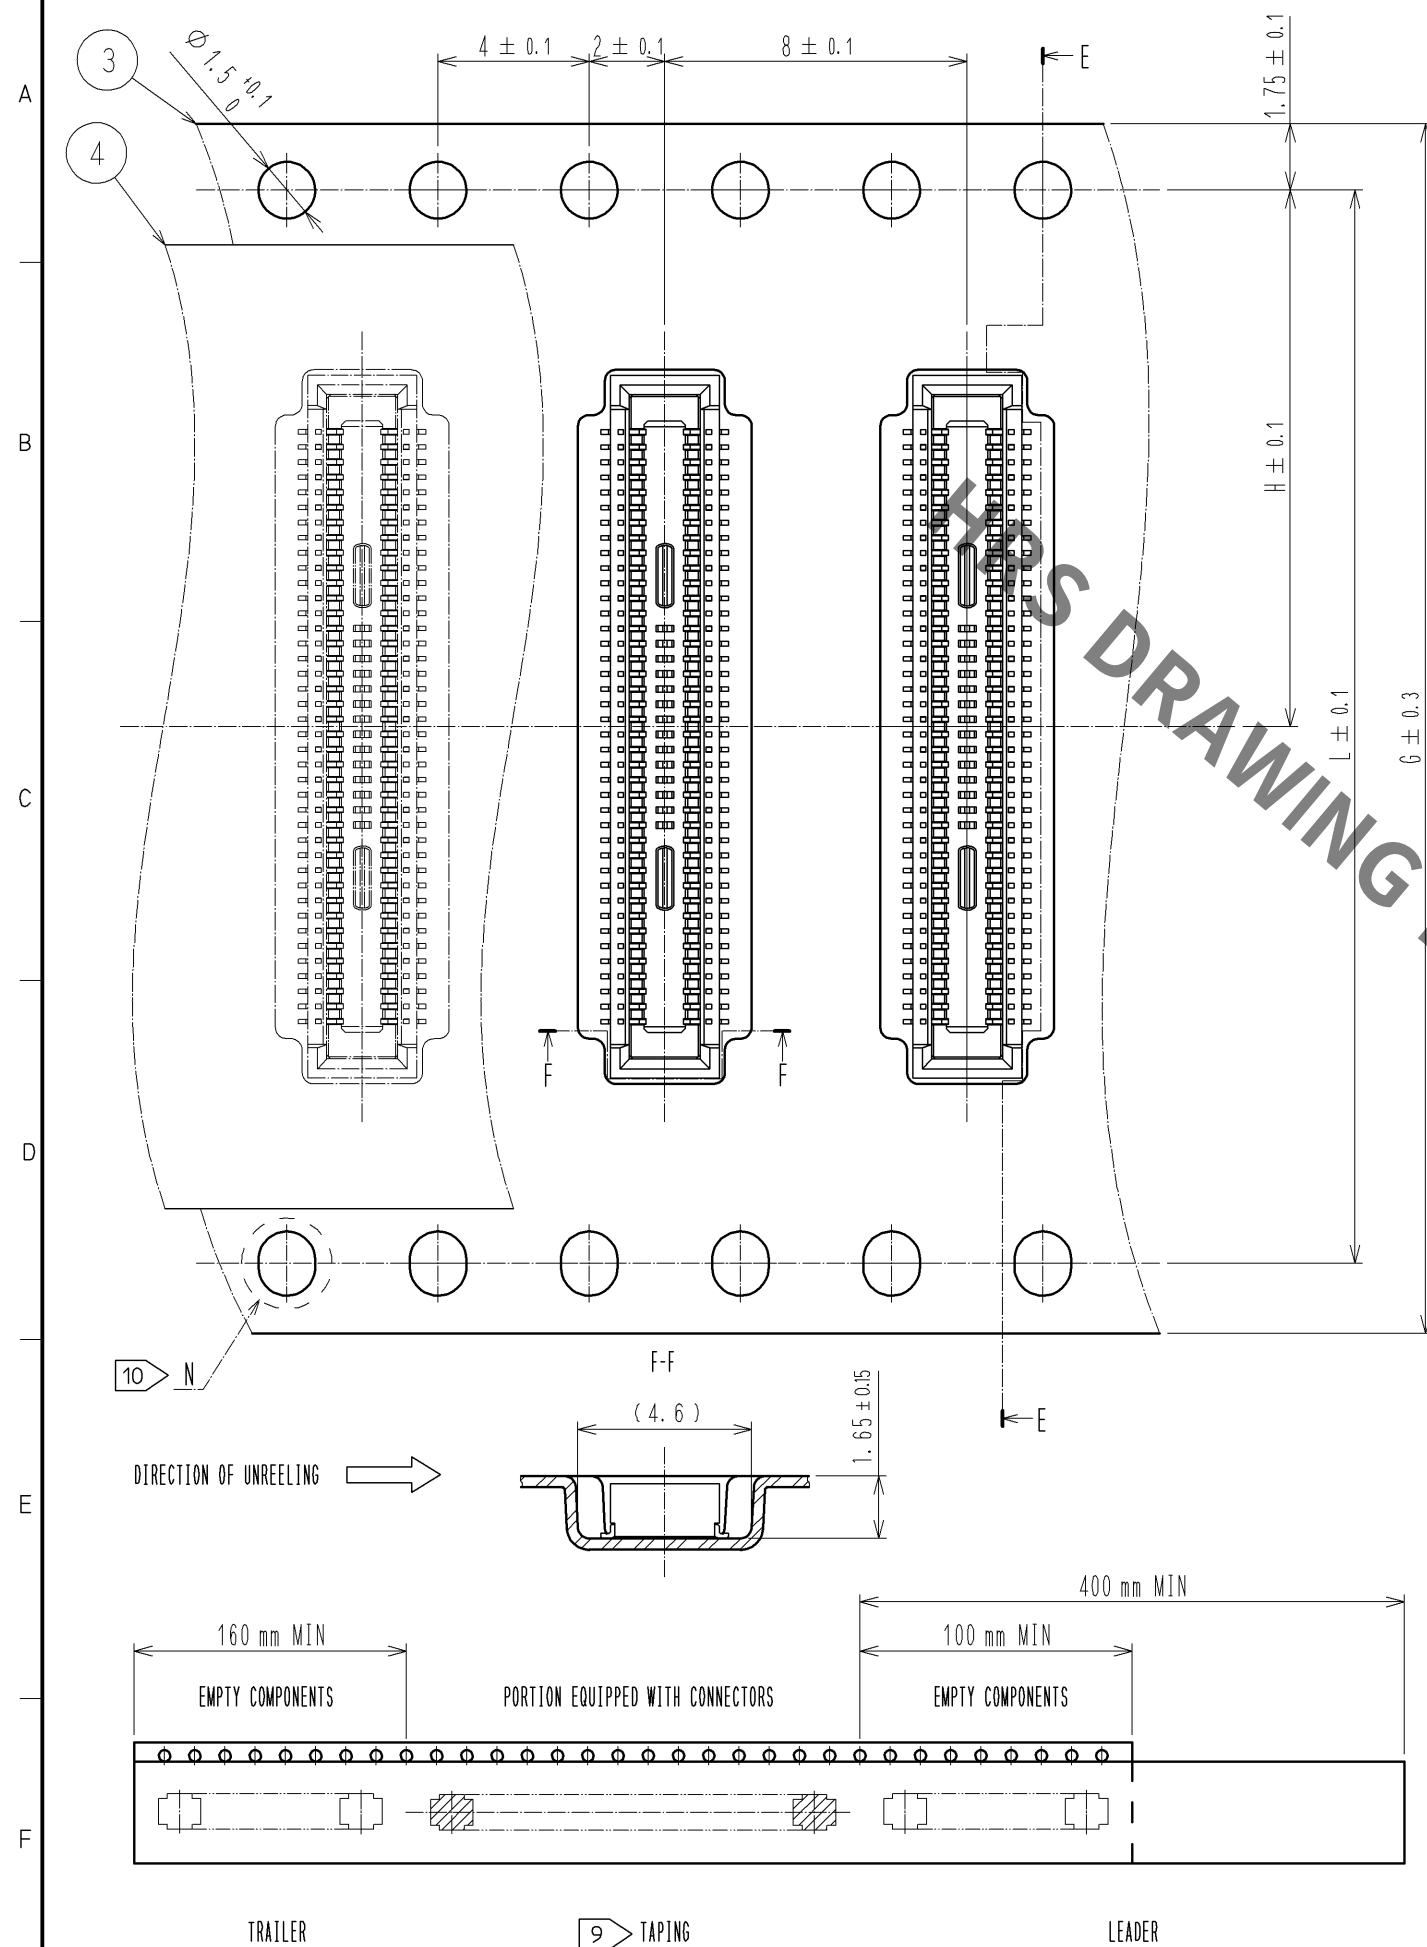

DETAIL OF PART NO. LABEL		
製造年月日	**	** **
製品コード	CL684-****-*-58	
製品名	DF40C-*DS-0.4V(58)	
数量	1000	
納入者	ヒロセ電機(株)	

DATE OF MANUFACTURED
CODE NO.
PART NO.
QUANTITY
SUPPLIER

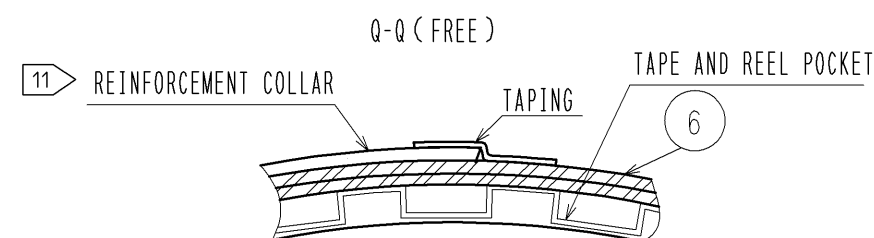

PART NO.	G	H	J	K	L	M
DF40C-100S-0.4V(58)	16	7.5	17.5	21.5	—	4.
DF40C-200S-0.4V(58)	16	7.5	17.5	21.5	—	6.
DF40C-240S-0.4V(58)	16	7.5	17.5	21.5	—	7.
DF40C-300S-0.4V(58)	24	11.5	25.5	29.5	—	8.
DF40C-340S-0.4V(58)	24	11.5	25.5	29.5	—	8.
DF40C-400S-0.4V(58)	24	11.5	25.5	29.5	—	10.
DF40C-500S-0.4V(58)	24	11.5	25.5	29.5	—	12.
DF40C-600S-0.4V(58)	24	11.5	25.5	29.5	—	14.
DF40C-700S-0.4V(58)	32	14.2	33.5	37.5	28.4	16.
DF40C-800S-0.4V(58)	32	14.2	33.5	37.5	28.4	18.
DF40C-900S-0.4V(58)	44	20.2	45.5	49.5	40.4	20.
DF40C-1000S-0.4V(58)	44	20.2	45.5	49.5	40.4	22.

- NOTES) 7. PER REEL 1000 CONNECTORS.
8. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
9 REFER TO JIS C 0806(IEC 60286-3.PACKING OF COMPONENTS FOR AUTOMATIC HANDLING)
10 10 TO 60 POSITIONS EMBOSSED CARRIER TAPE HAS THE SPROCKET HOLE ON ONE SIDES.
11 AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER
CIRCUMFERENCE OF TAPE AND REEL POCKET, AND TAPE DOWN AT THE END THE COLLAR.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DF40C-30DS-0.4V\(58\)](#)