
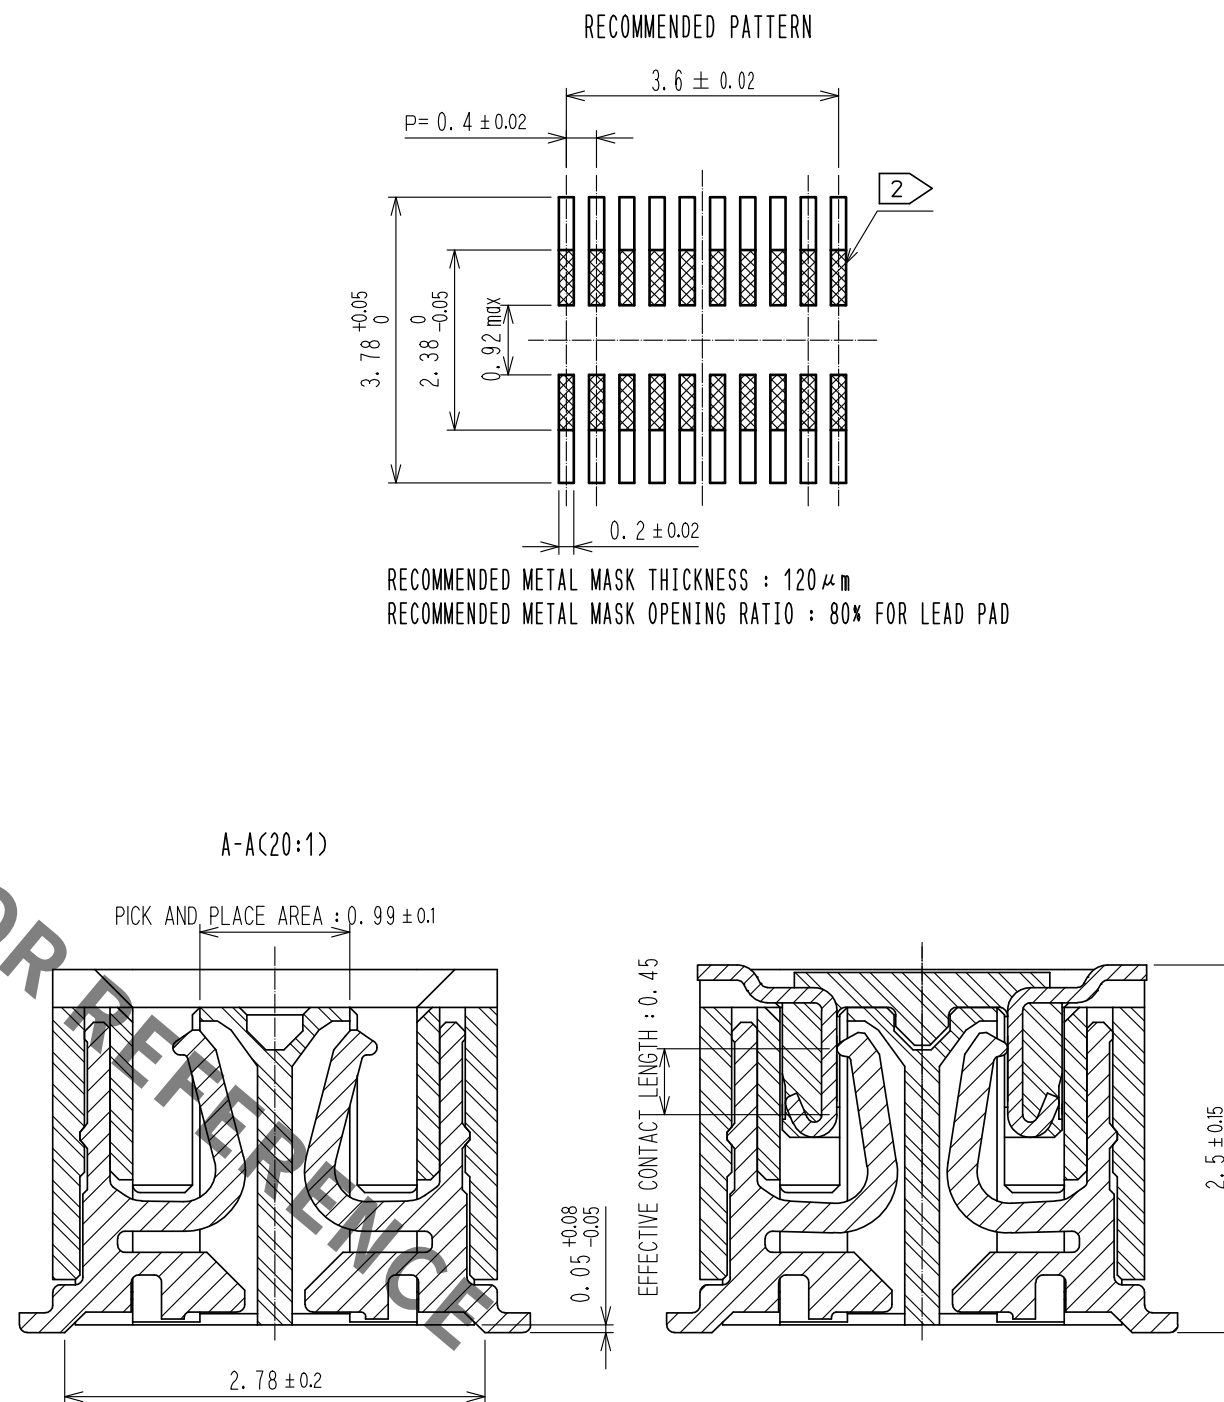
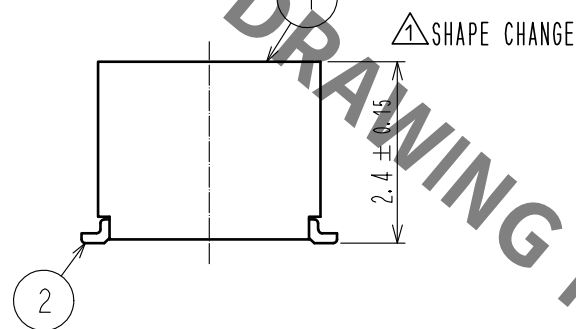
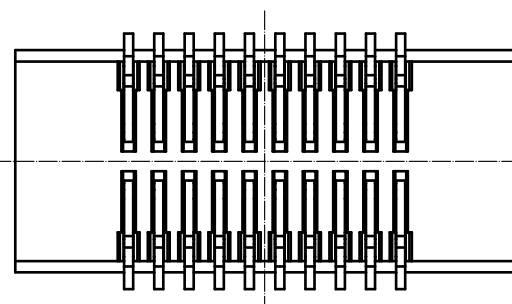
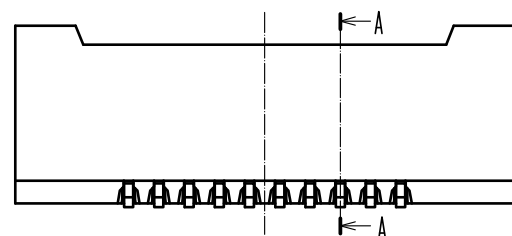
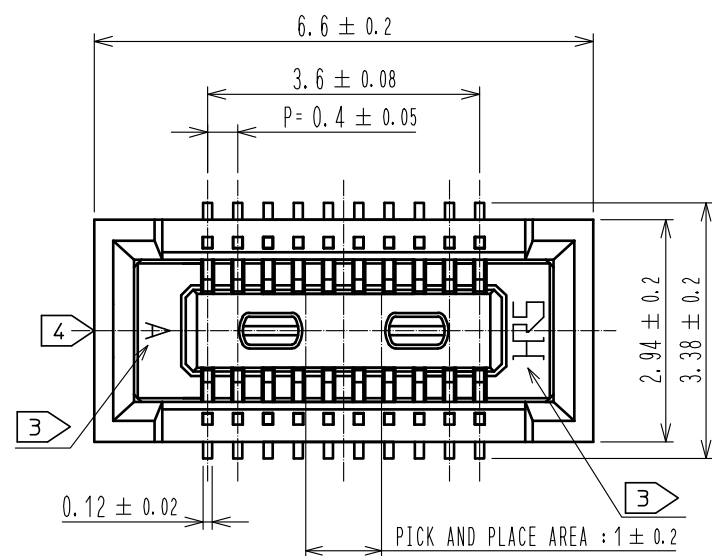



Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



RECOMMENDED METAL MASK THICKNESS : 120 μ m
RECOMMENDED METAL MASK OPENING RATIO : 80% FOR LEAD PAD

- NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
2 IS NO PATTERN AREA OTHER THAN THE SAME CIRCUIT.
3 HRS MARK AND CAV NO. IS INDICATED IN APPROXI POSITION SHOWN.
4 GATE POSITION IS POSITIONED IN APPROXIMAL AREA SHOWN.

2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.05 μ m MIN		6	PS	CLEAR, REINFORCEMENT COLLAR							
		SMT LEAD: GOLD 0.05 μ m MIN		5	PS	BLACK							
		UNDERPLATING: NICKEL 1 μ m MIN		4	POLYESTER	CLEAR, COVER TAPE							
1	LCP	BLACK, UL94V-0		3	PS	CLEAR, EMBOSSED CARRIER TAPE							
NO.		MATERIAL		FINISH , REMARKS		NO.		MATERIAL		FINISH , REMARKS			
UNITS mm				SCALE 10 : 1			COUNT 1	DESCRIPTION OF REVISIONS DIS-H-00007018			DESIGNED RH. KAGAMI	CHECKED YK. SATAKE	DATE 20201211
 HIROSE ELECTRIC CO., LTD.		APPROVED : MO. ISHIDA		20170908		DRAWING NO. EDC-319623-58-01							
		CHECKED : TS. MIYAZAKI		20170908		PART NO. DF40HC(2.5)-20DS-0.4V(58)							
		DESIGNED : SH. HOSODA		20170908		CODE NO. CL0684-4126-3-58							
		DRAWN : RN. IIDA		20170908		 							



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DF40HC\(2.5\)-20DS-0.4V\(58\)](#)