




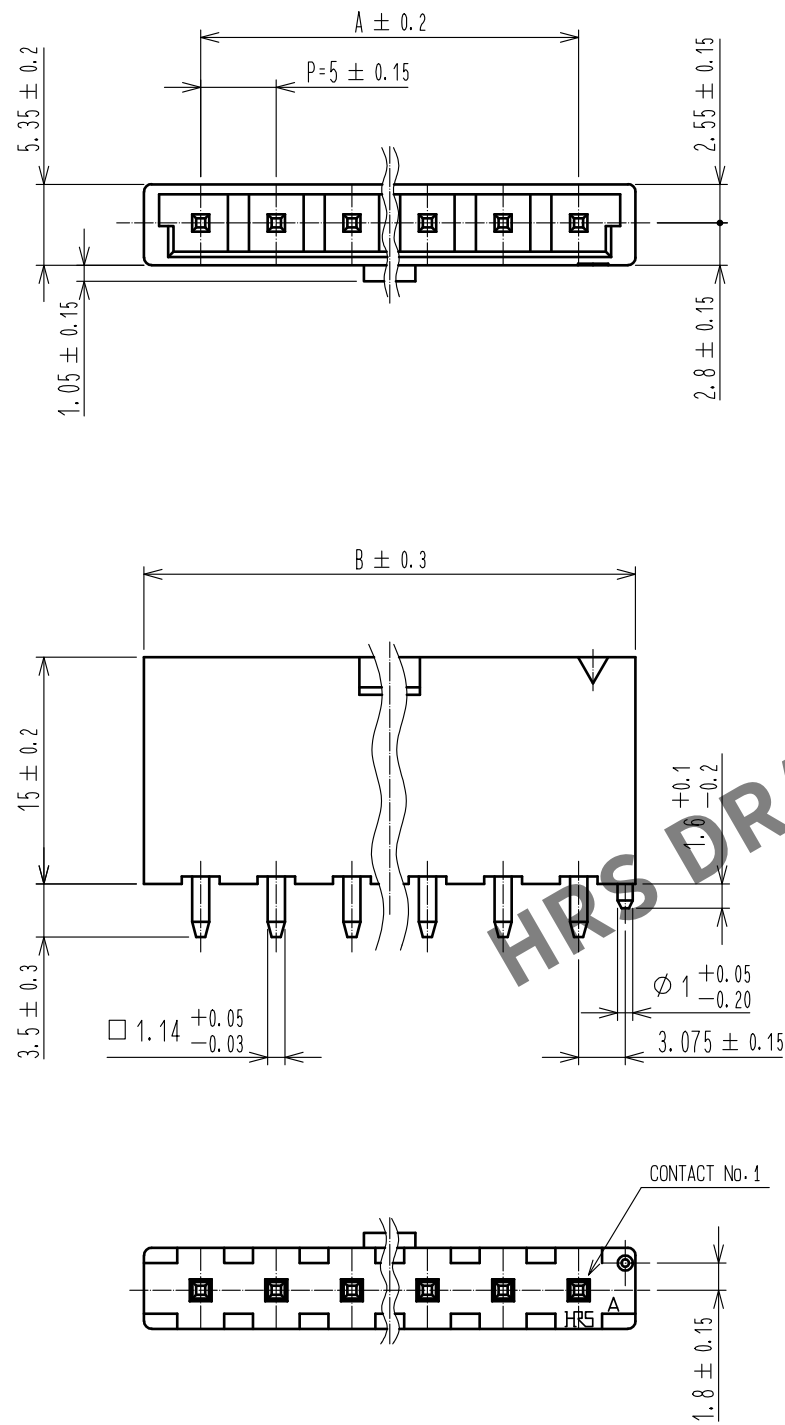


APPLICATION DIAGRAM

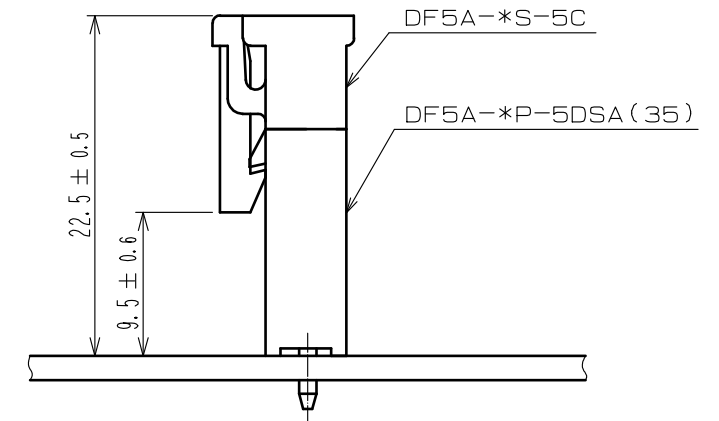

RECOMMENDED PCB LAYOUT (t=1.6±0.1)

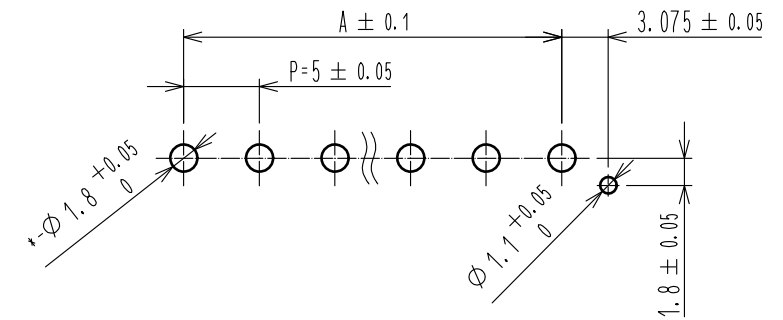

PART No.	CODE No.	A	B
DF5A- 2P-5DSA(35)	CL676-0016-9-35	-	12.5
DF5A- 3P-5DSA(35)	CL676-0017-1-35	10.0	17.5
DF5A- 4P-5DSA(35)	CL676-0018-4-35	15.0	22.5
DF5A- 5P-5DSA(35)	CL676-0019-7-35	20.0	27.5
DF5A- 6P-5DSA(35)	CL676-0020-6-35	25.0	32.5
DF5A- 7P-5DSA(35)	CL676-0021-9-35	30.0	37.5
DF5A- 8P-5DSA(35)	CL676-0022-1-35	35.0	42.5
DF5A- 9P-5DSA(35)	CL676-0023-4-35	40.0	47.5
DF5A-10P-5DSA(35)	CL676-0024-7-35	45.0	52.5

			2		BRASS		SURFACE:TIN PLATED 1#m min UNDER PLATING:NICKEL PLATED 0.5#m min				
1	POLYAMIDE		NATURAL(BEIGE), UL94V-0								
NO.	MATERIAL		FINISH , REMARKS				NO.	MATERIAL		FINISH , REMARKS	
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS			DESIGNED		CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.			APPROVED : KI. AKIYAMA		15. 05. 15		DRAWING NO.	EDC-160242-35-00			
			CHECKED : TS. FUKUSHIMA		15. 05. 14		PART NO.	DF5A-*P-5DSA(35)			
			DESIGNED : TS. KUMAZAWA		15. 05. 14		CODE NO.	CL676-			
			DRAWN : MI. SAKIMURA		15. 05. 14			1	1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DF5A-3P-5DSA\(35\)](#)