



Sep.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

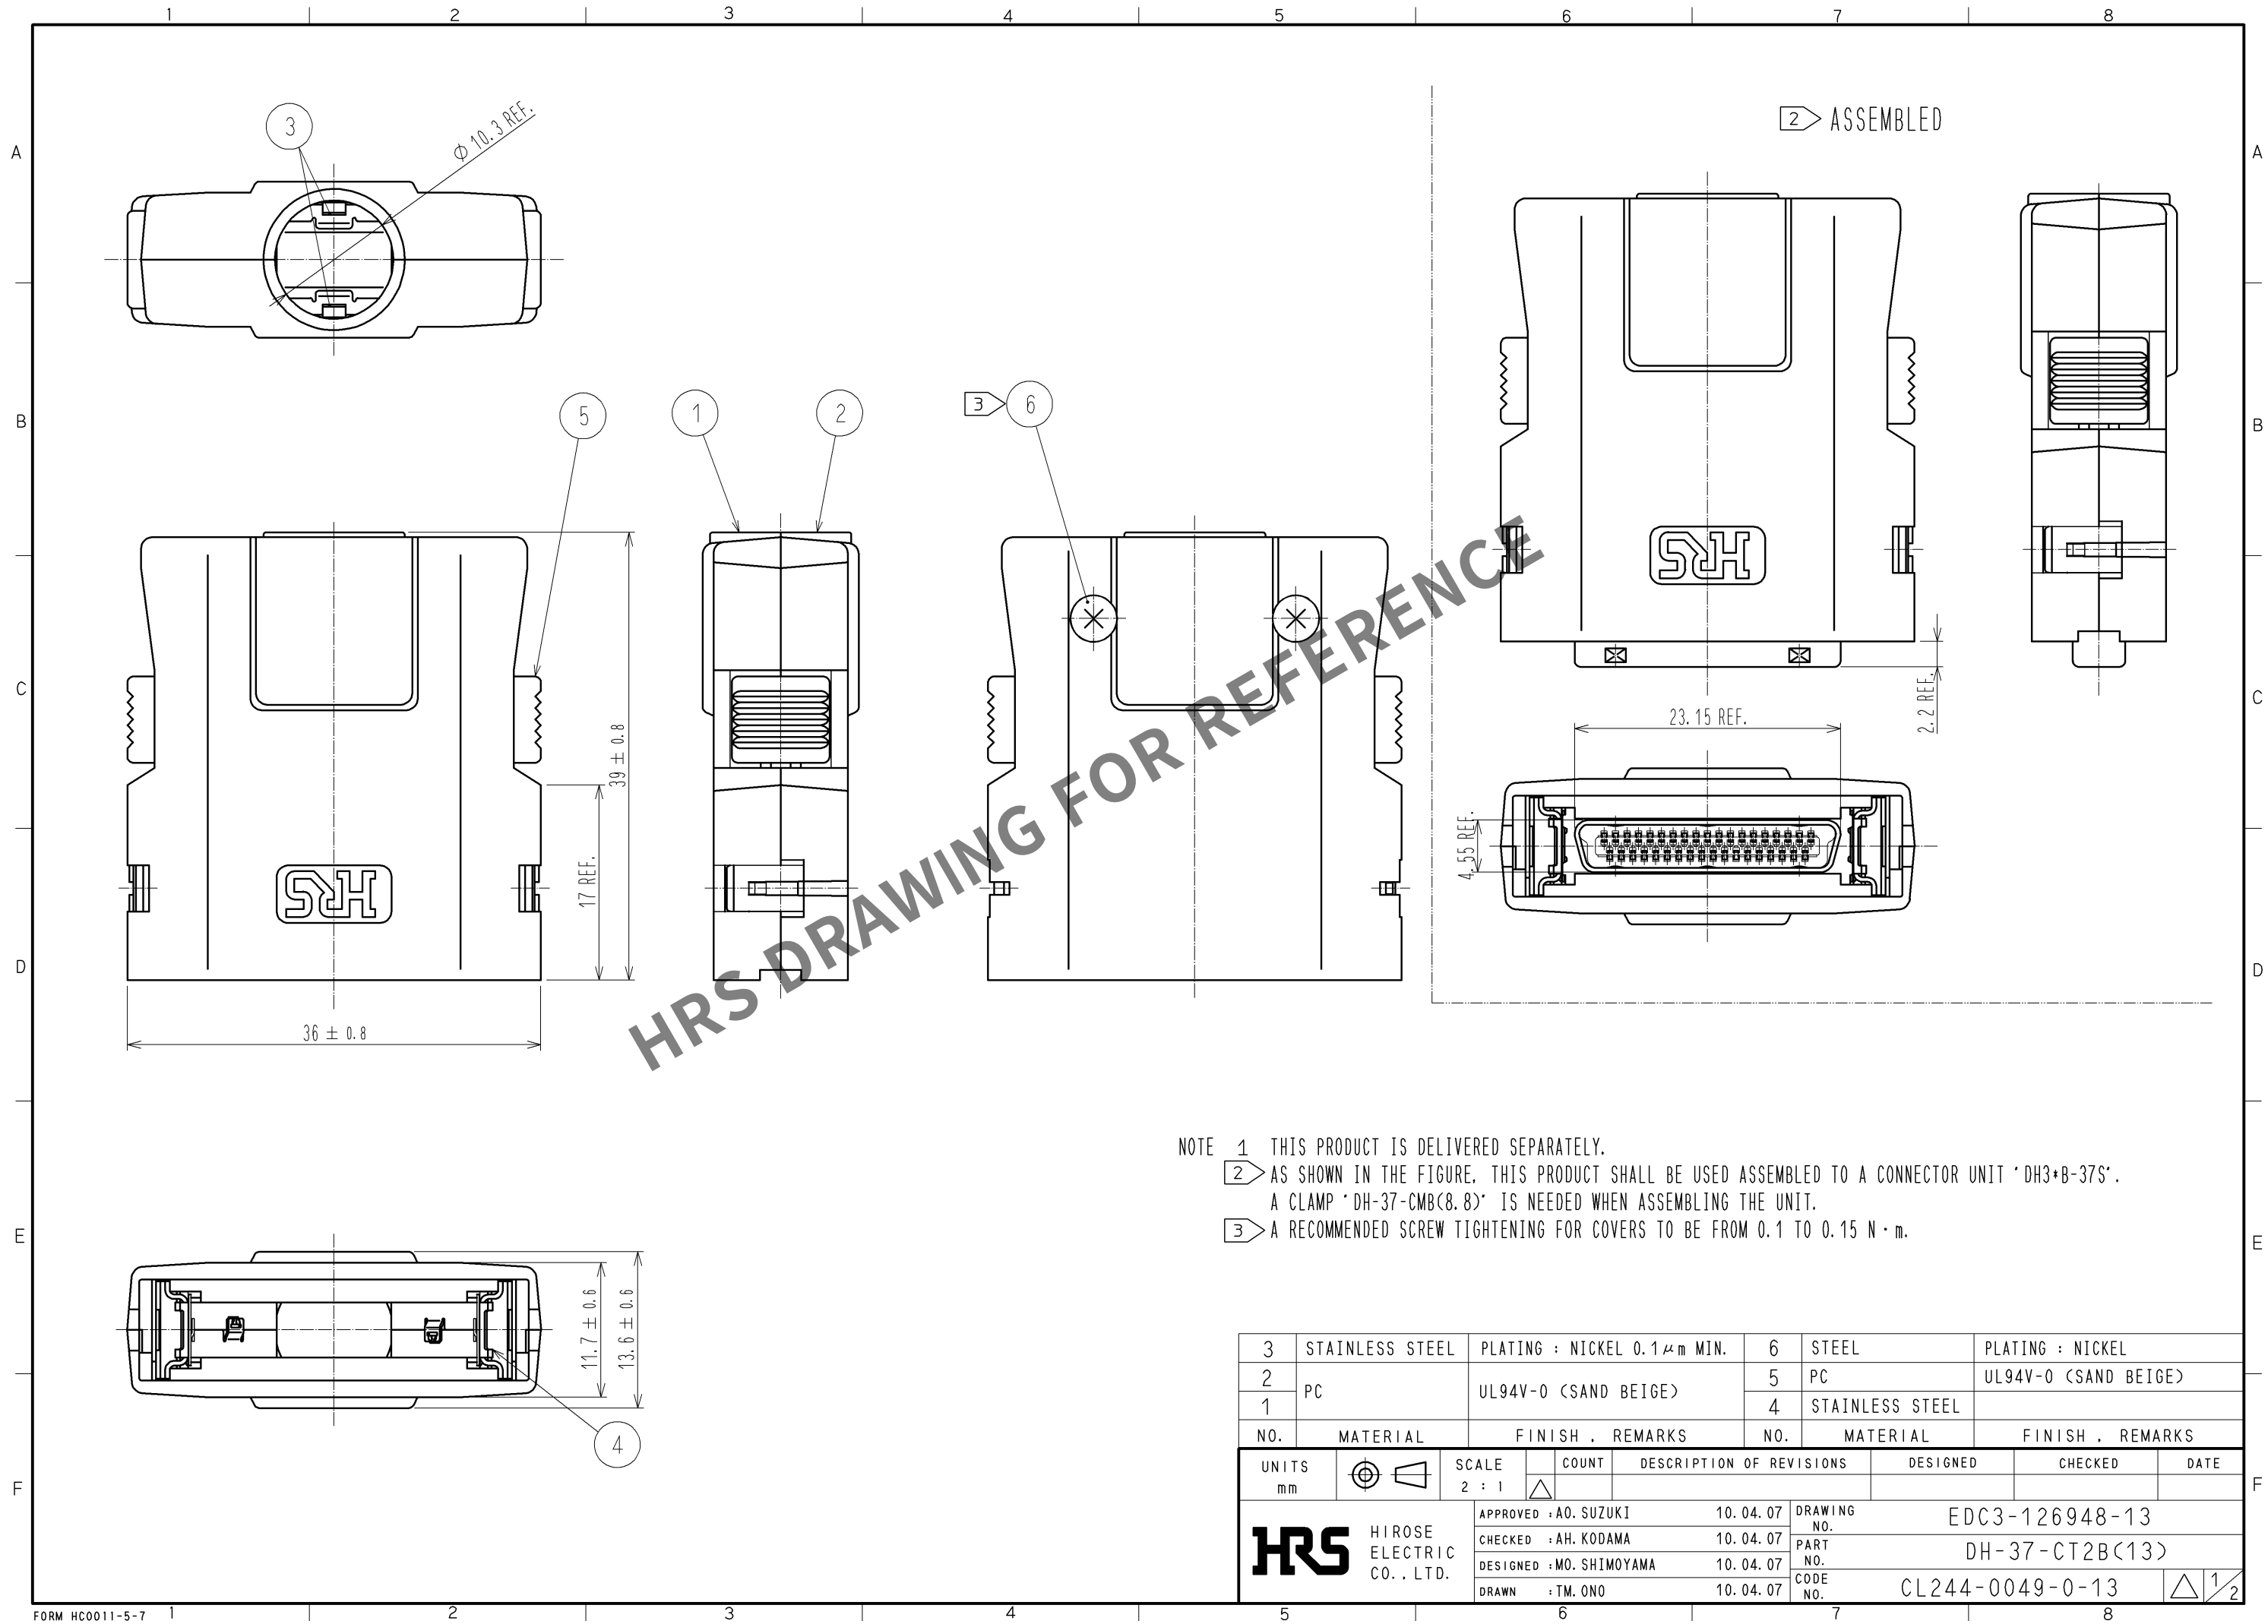

- NOTE 1 THIS PRODUCT IS DELIVERED SEPARATELY.
2 AS SHOWN IN THE FIGURE, THIS PRODUCT SHALL BE USED ASSEMBLED TO A CONNECTOR UNIT 'DH3+B-37S'.
A CLAMP 'DH-37-CMB(8.8)' IS NEEDED WHEN ASSEMBLING THE UNIT.
3 A RECOMMENDED SCREW TIGHTENING FOR COVERS TO BE FROM 0.1 TO 0.15 N・m.

3	STAINLESS STEEL	PLATING : NICKEL 0.1μm MIN.	6	STEEL	PLATING : NICKEL
2	PC	UL94V-0 (SAND BEIGE)	5	PC	UL94V-0 (SAND BEIGE)
1			4	STAINLESS STEEL	
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	
 HIROSE ELECTRIC CO., LTD.		APPROVED : A0. SUZUKI	10. 04. 07	DRAWING NO.	EDC3-126948-13
		CHECKED : AH. KODAMA	10. 04. 07	PART NO.	DH-37-CT2B(13)
		DESIGNED : MO. SHIMOYAMA	10. 04. 07	CODE NO.	CL244-0049-0-13
		DRAWN : TM. ONO	10. 04. 07		
		DESIGNED	CHECKED	DATE	

Sep.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

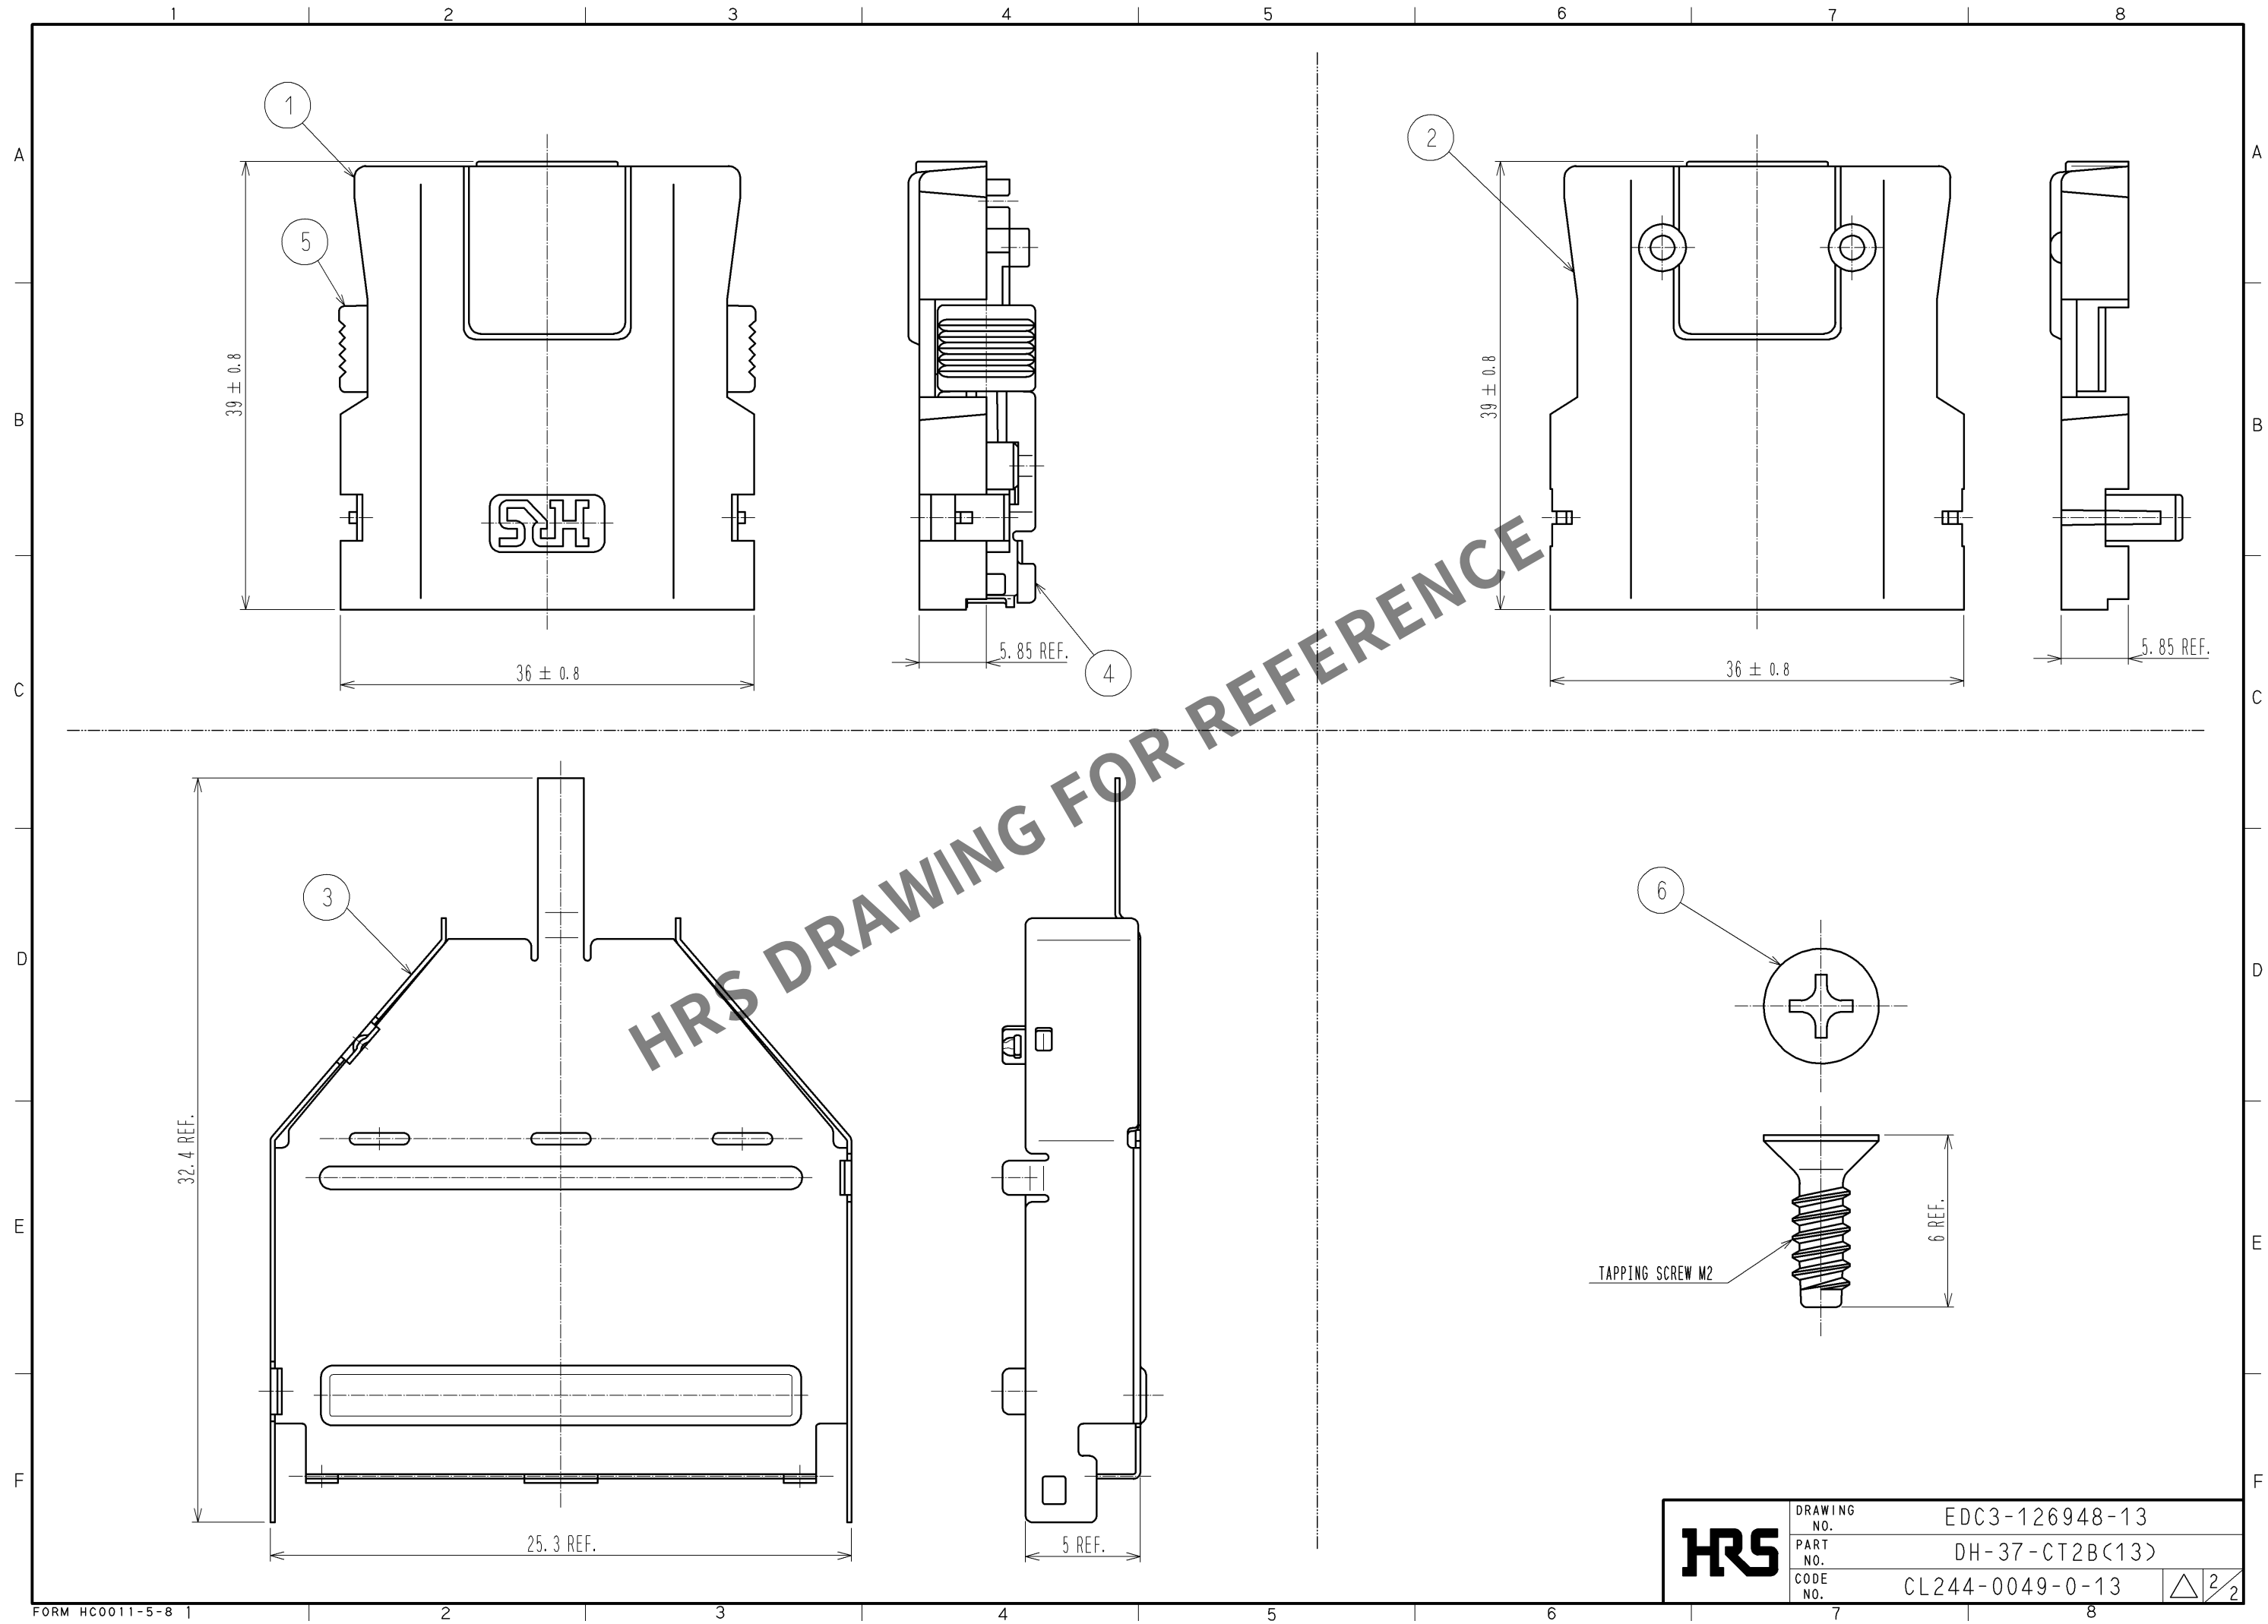

HRS	DRAWING NO.	EDC3-126948-13
	PART NO.	DH-37-CT2B(13)
	CODE NO.	CL244-0049-0-13
		$\triangle$ 2/2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DH-37-CT2B\(13\)](#)