

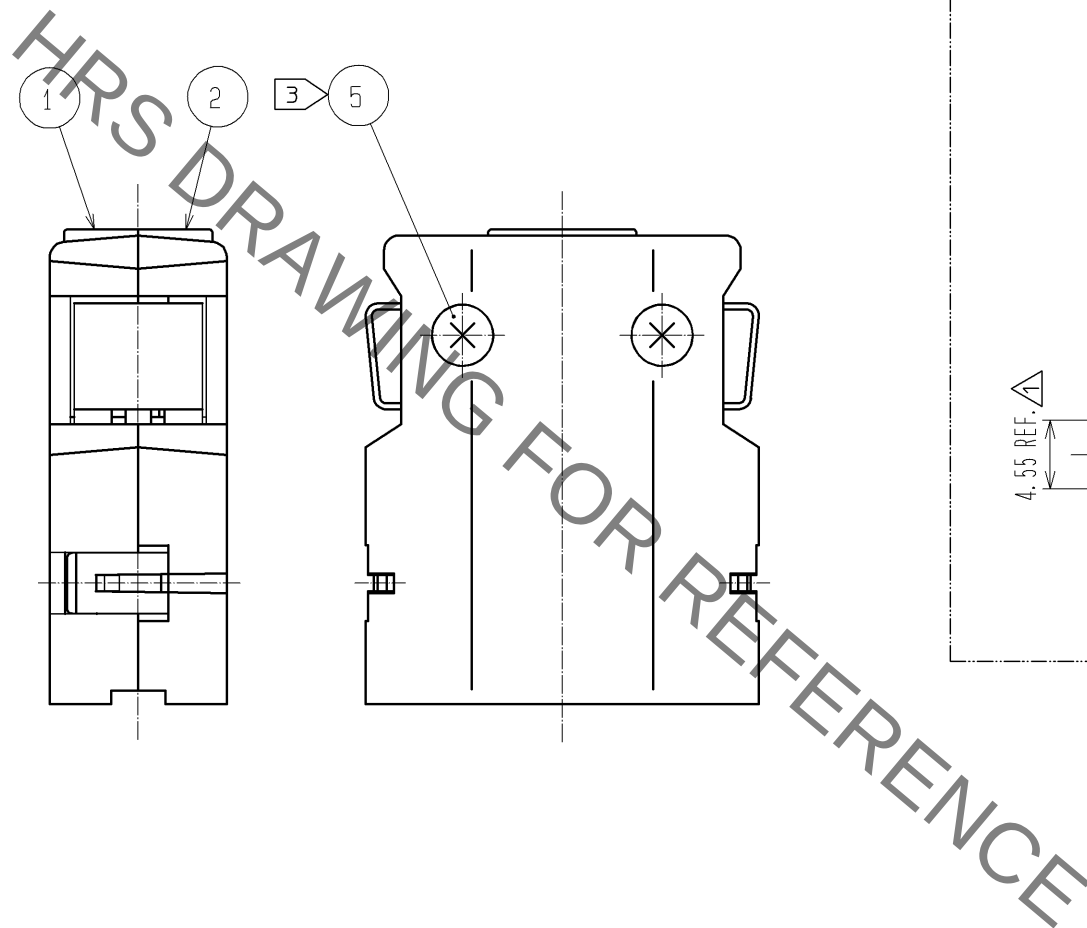
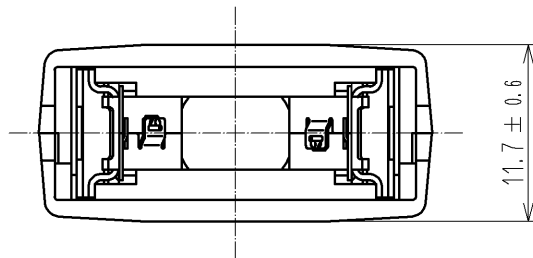
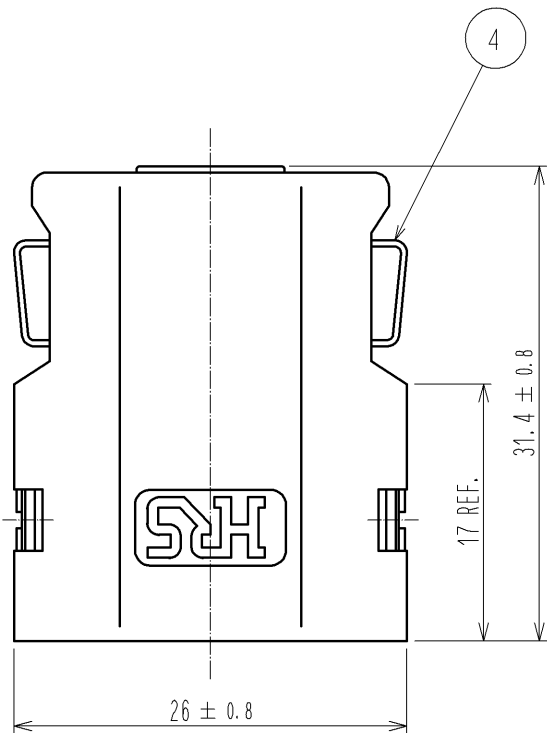


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

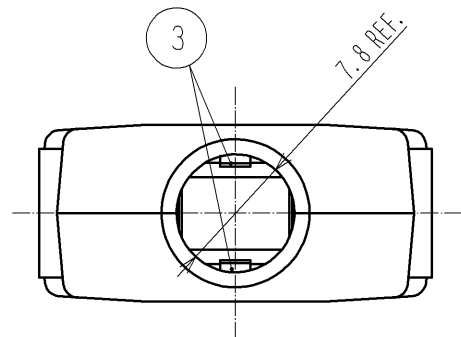


2 ASSEMBLED

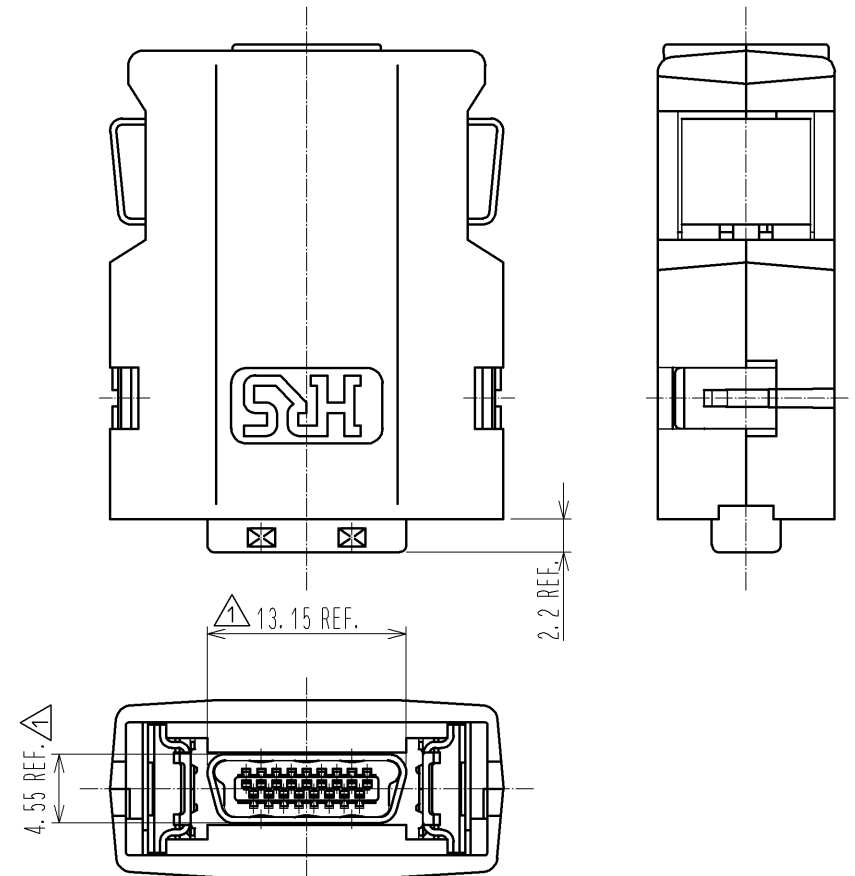

- NOTE 1 THIS PRODUCT IS DELIVERED SEPARATELY.
2 AS SHOWN IN THE FIGURE, THIS PRODUCT SHALL BE USED ASSEMBLED TO A CONNECTOR UNIT 'DH3*B-17S'.
A CLAMP 'DH-17-CMB(6.3)' IS NEEDED WHEN ASSEMBLING THE UNIT.
3 A RECOMMENDED SCREW TIGHTENING FOR COVERS TO BE FROM 0.1 TO 0.15 N · m.

2		5		STEEL		TRIVALENT BLACK CHROMATE	
1		4		STAINLESS STEEL			
		3		STAINLESS STEEL		PLATING : NICKEL 0.1 μm MIN.	
NO.		MATERIAL		FINISH . REMARKS		NO.	
UNITS		SCALE		COUNT		DESCRIPTION OF REVISIONS	
mm		2 : 1		2		DIS-E-003061	
HRS		HIROSE		APPROVED : A0. SUZUKI		09. 04. 22	
		ELECTRIC		CHECKED : KN. ICHIKAWA		09. 04. 22	
		CO., LTD.		DESIGNED : MO. SHIMOYAMA		09. 04. 21	
				DRAWN : MO. SHIMOYAMA		09. 04. 21	
						DRAWING NO. EDC3-126852-00	
						PART NO. DH-17-CT1B	
						CODE NO. CL244-0039-7-00	
						1/2	

Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

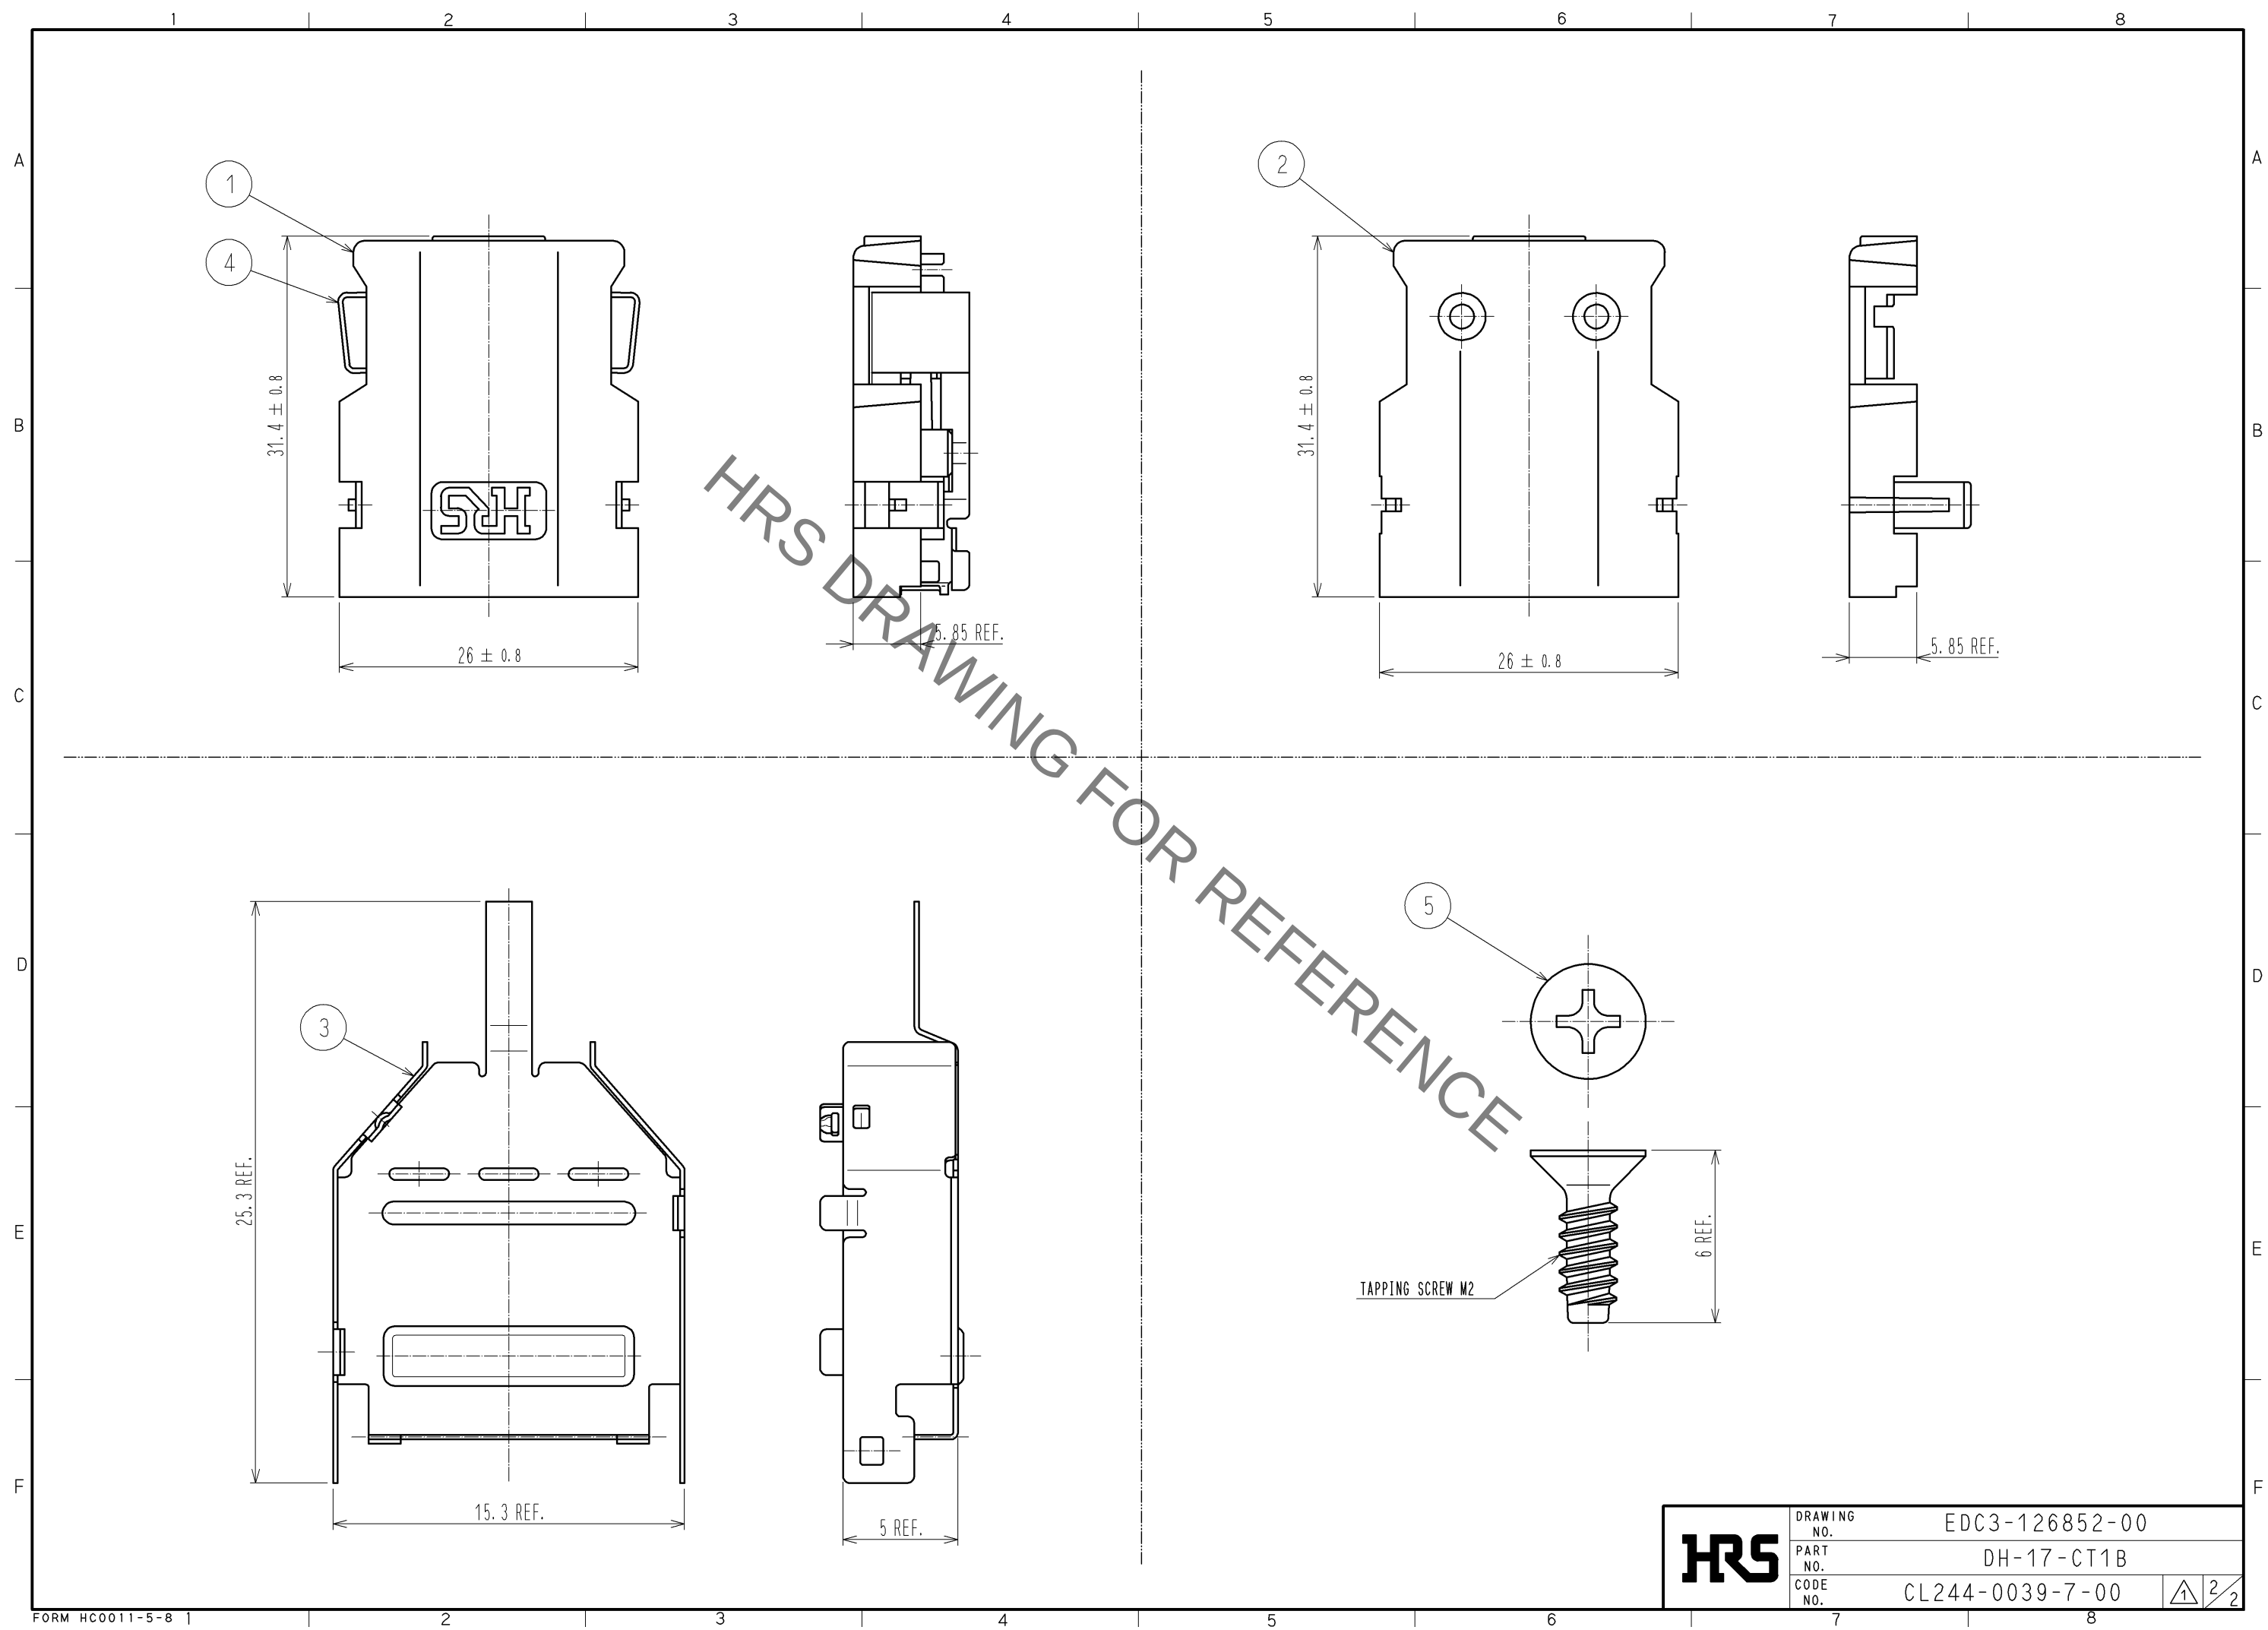

HRS	DRAWING NO.	EDC3-126852-00	
	PART NO.	DH-17-CT1B	
	CODE NO.	CL244-0039-7-00	122

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DH-17-CT1B](#)